



e) Pruebe en Postman los tres usuarios y verifique que cada uno accede únicamente a lo que le corresponde según su rol.



Administrador

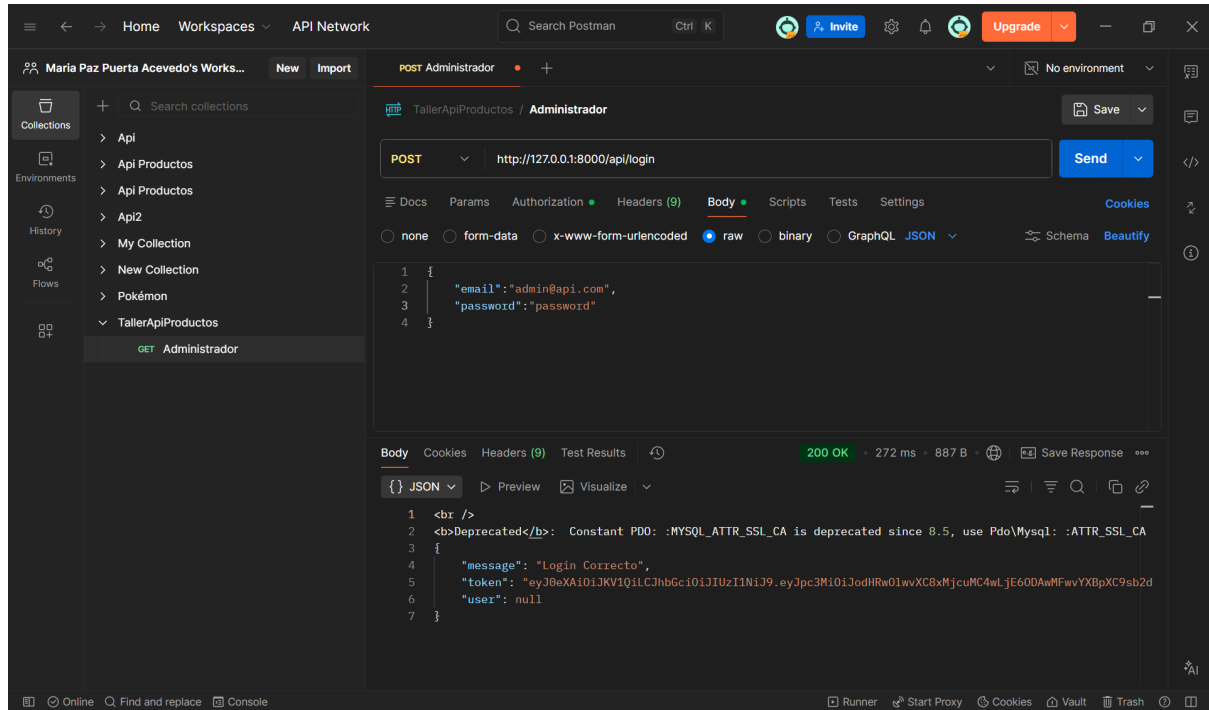


1. Login

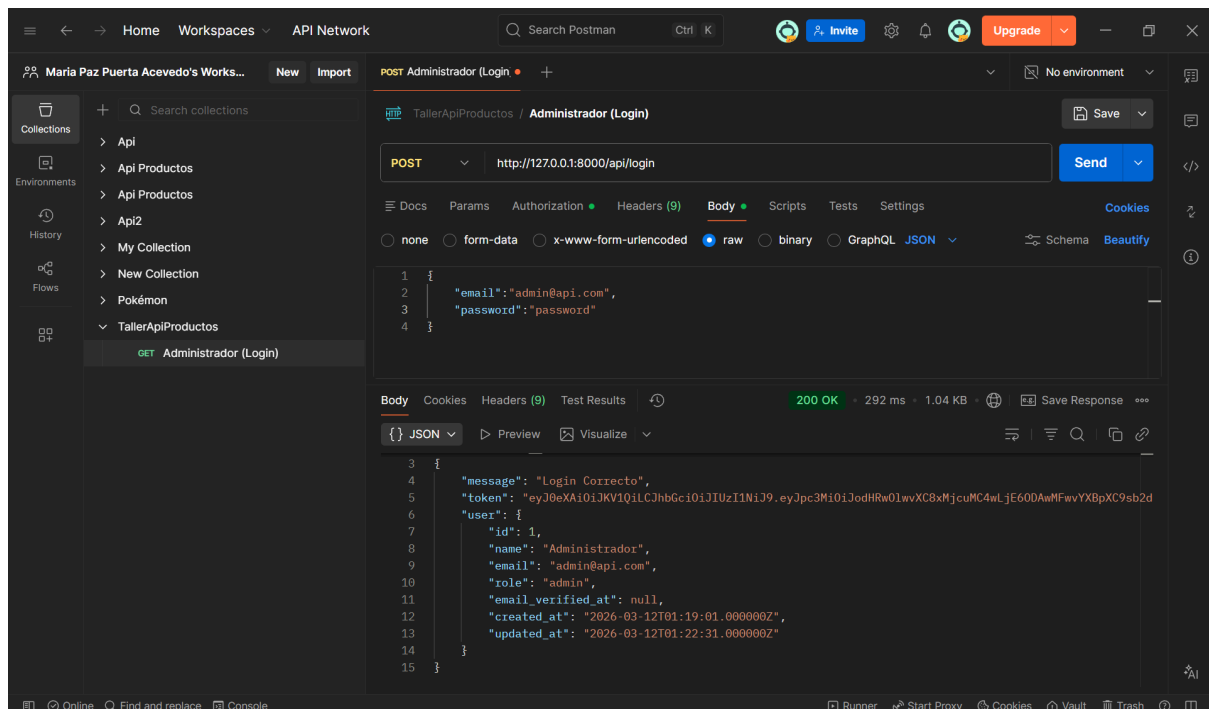


2. Consultar el listado

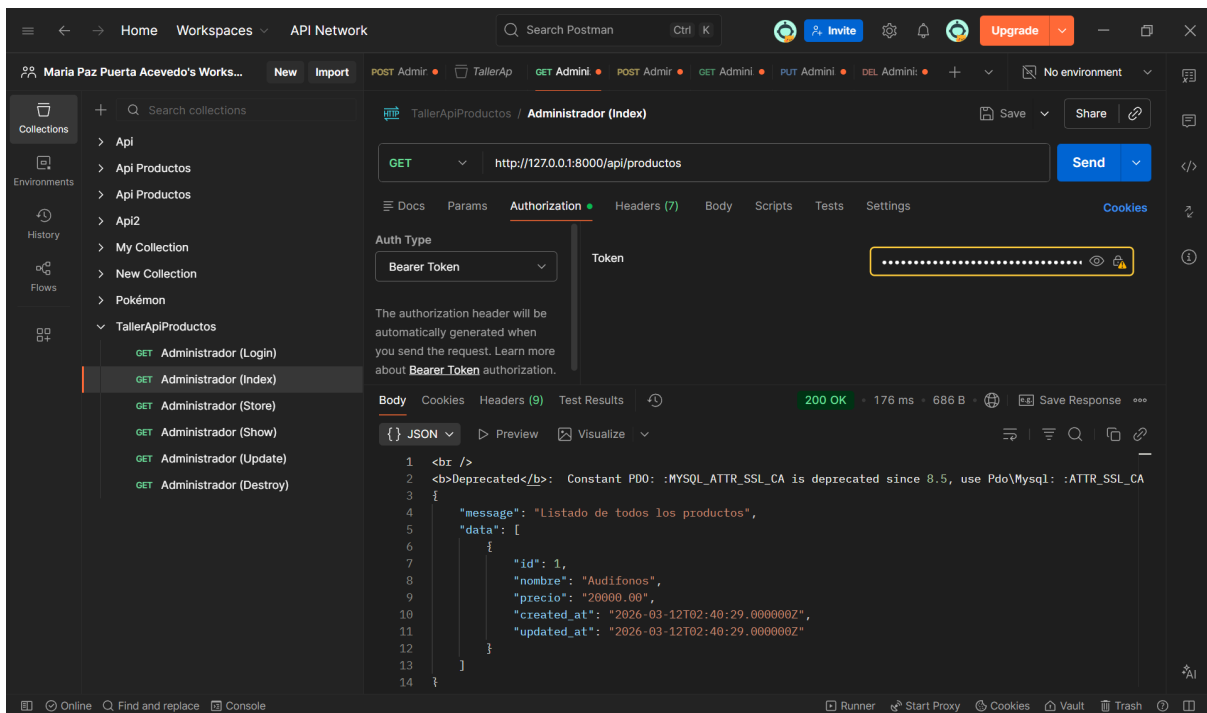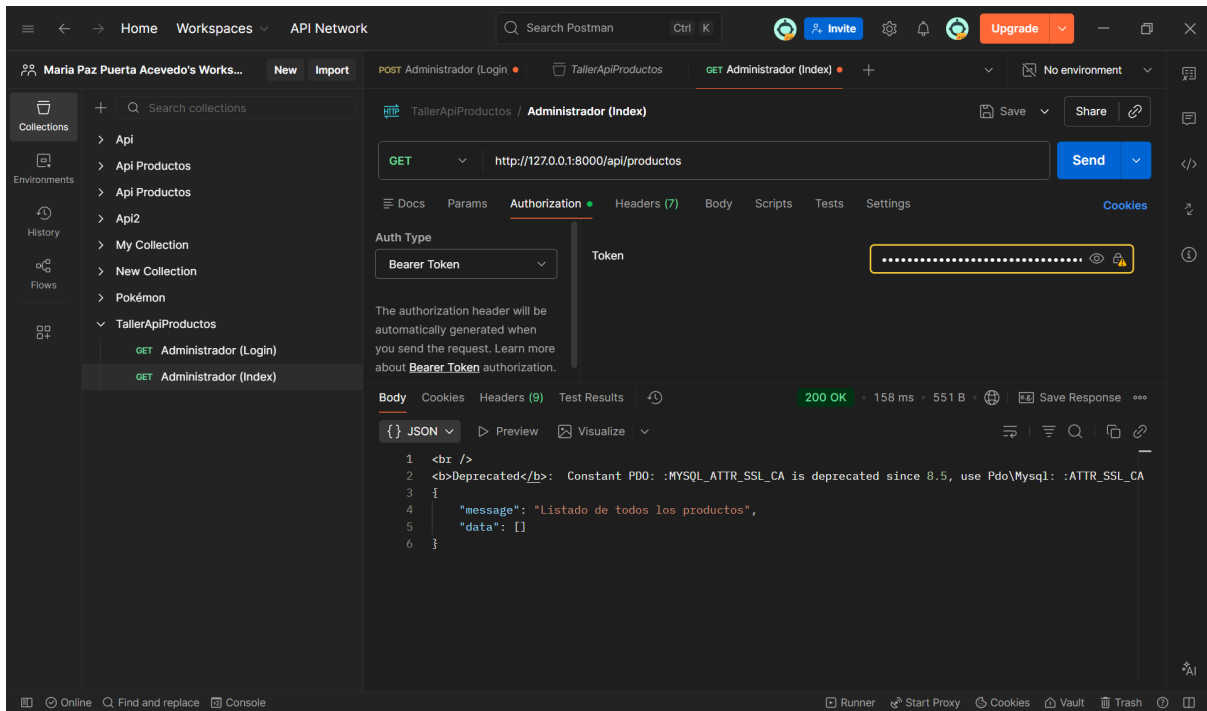


3. Crear productos

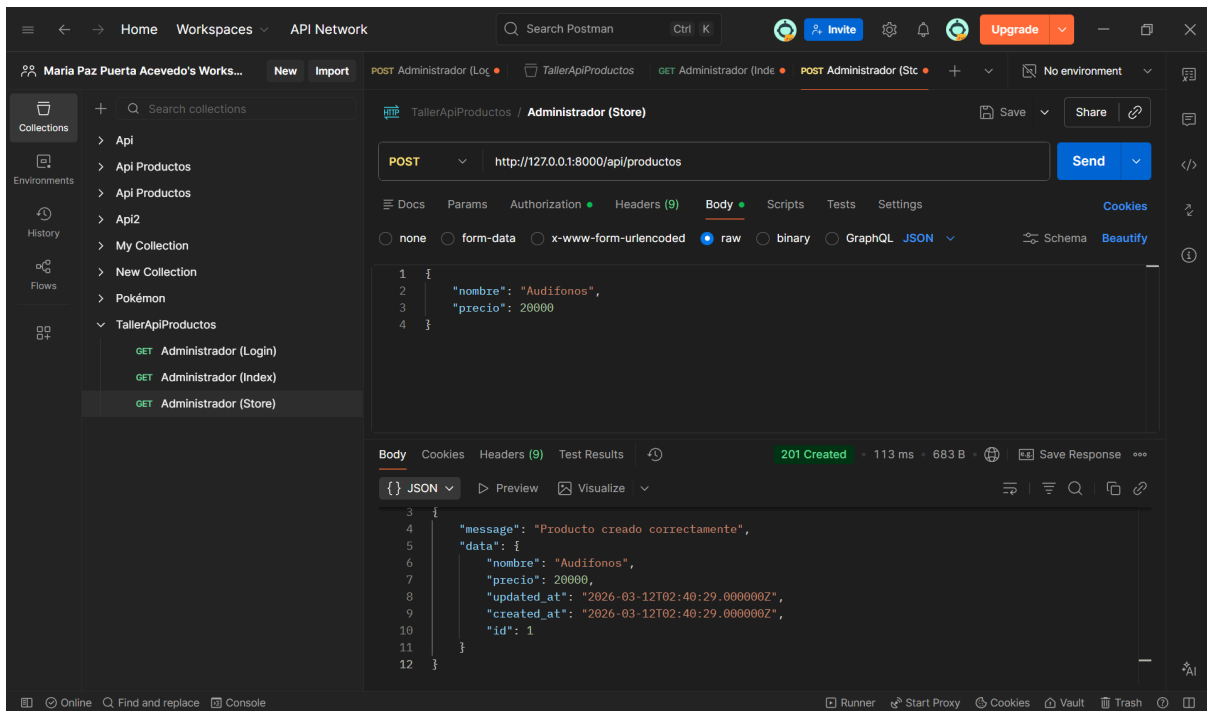


4. Consultar un producto por id

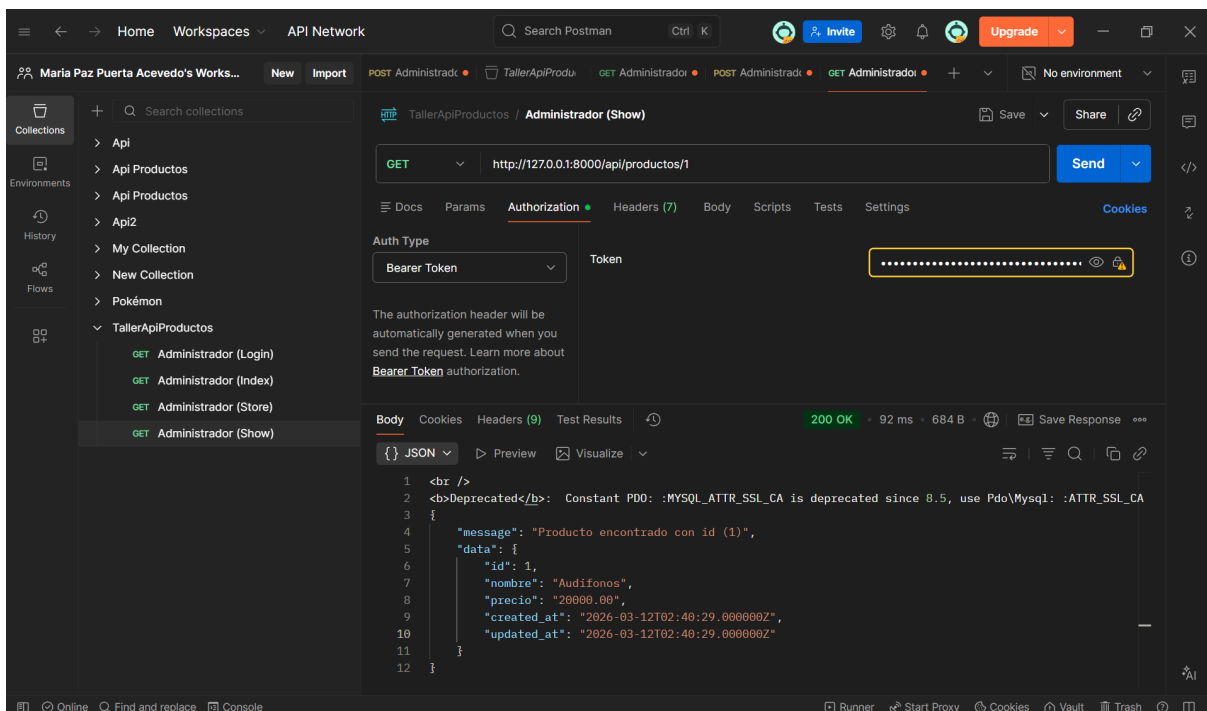

5. Actualizar productos

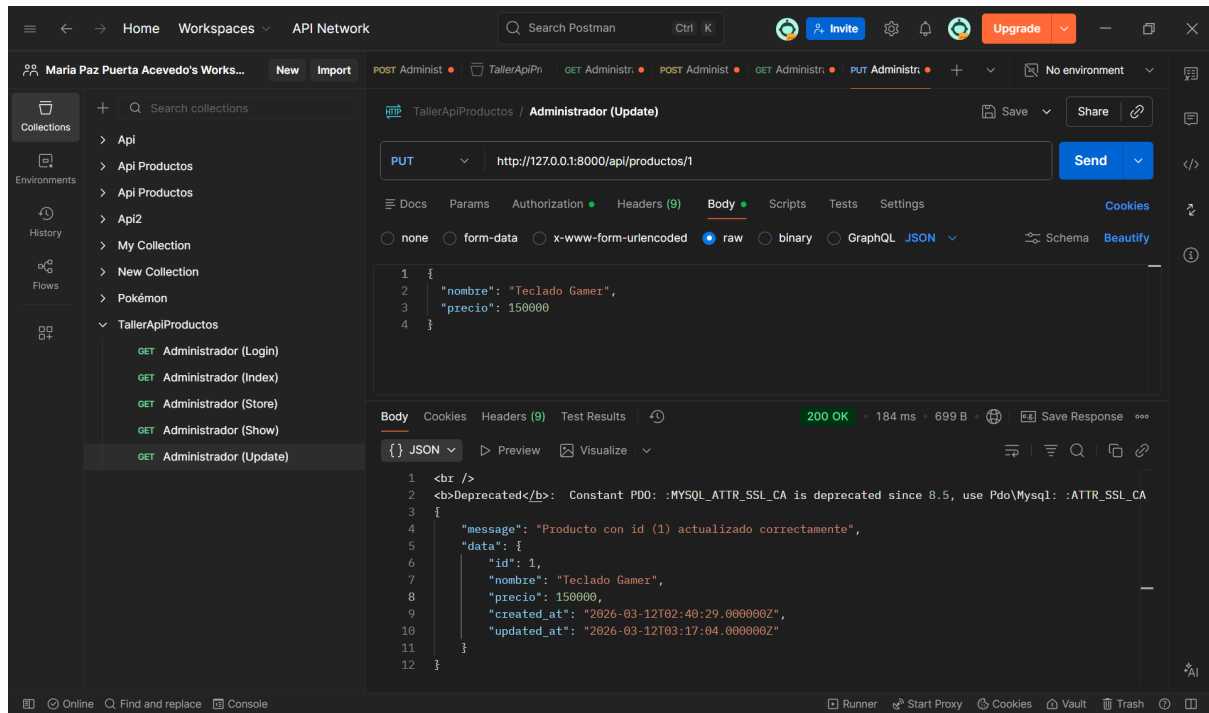


6. Eliminar productos

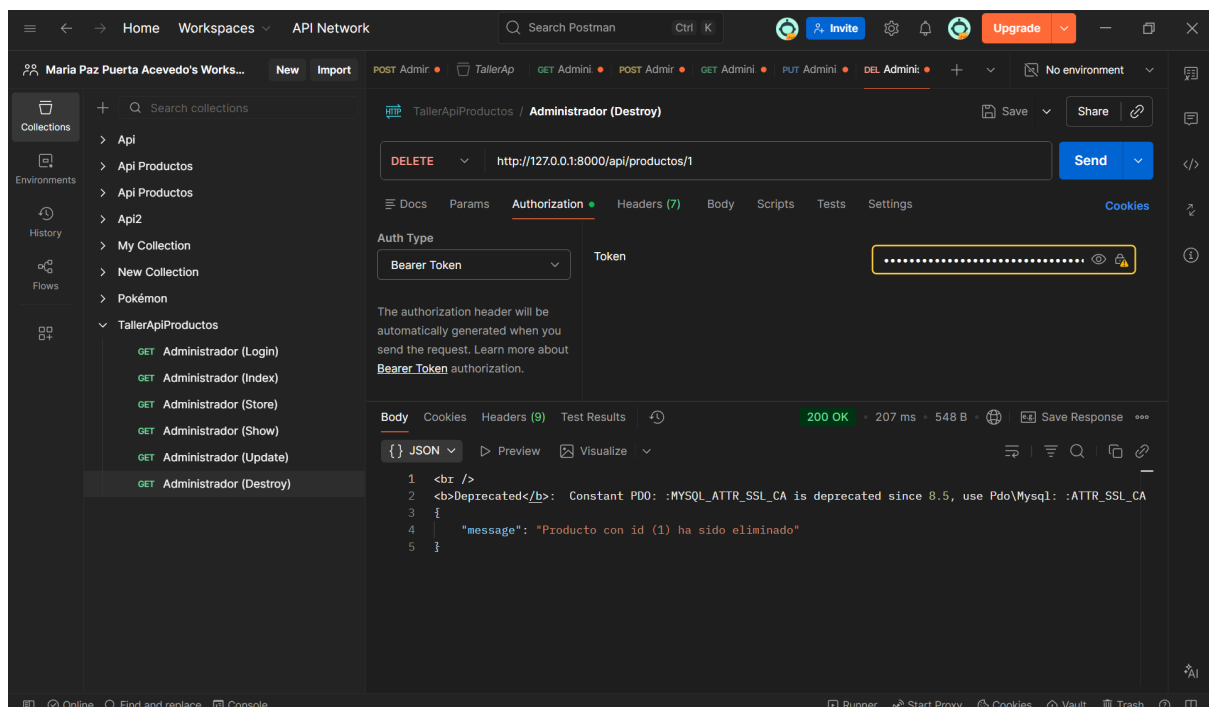


Usuario

1. Login

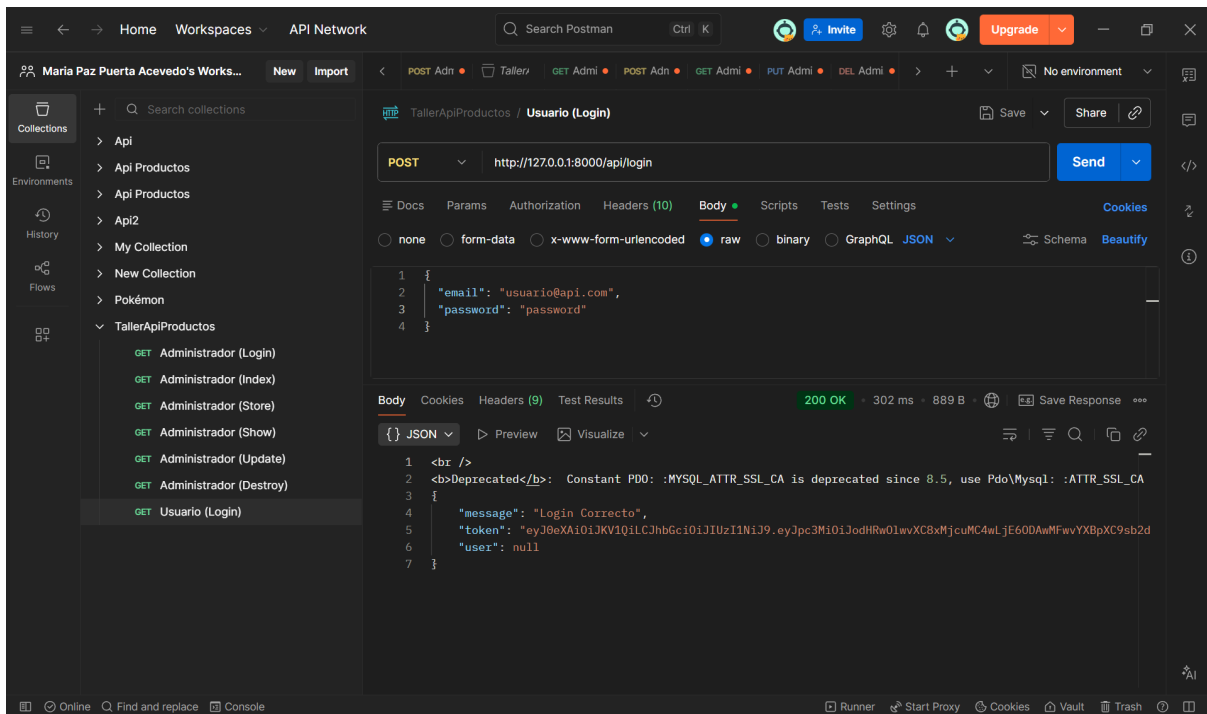

2. Crear productos

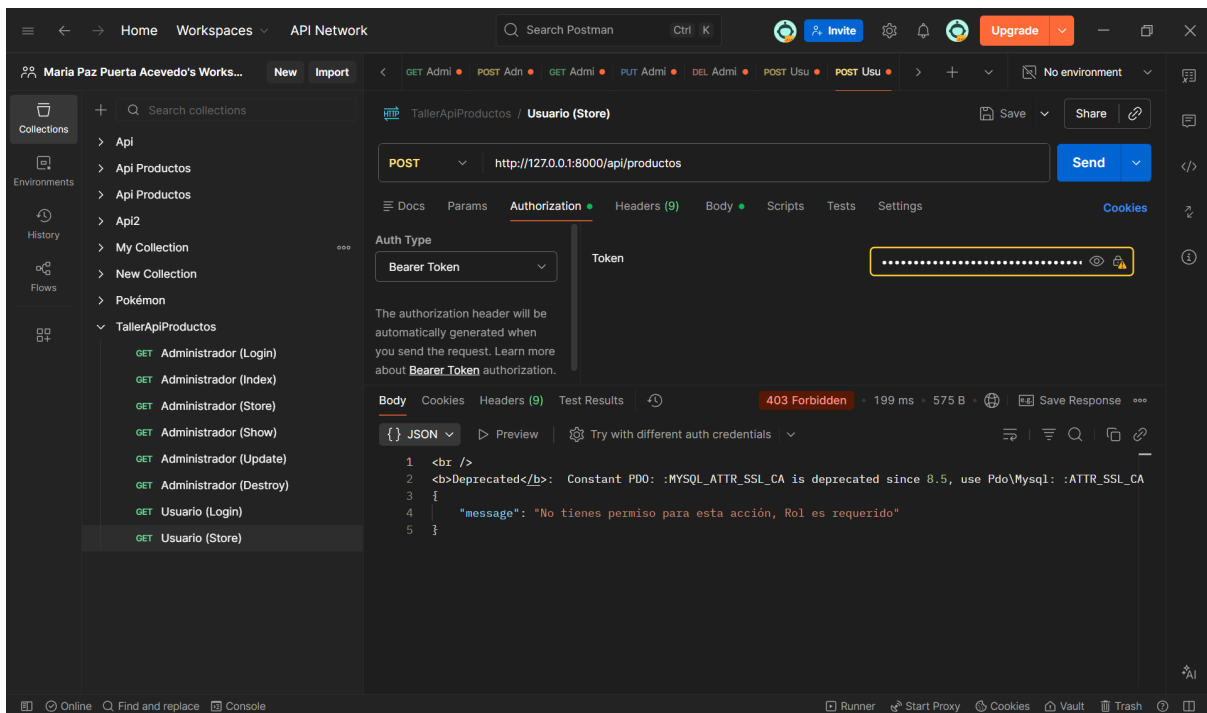

3. Consultar el listado

The screenshot shows the Postman interface for a workspace named "Maria Paz Puerta Acevedo's Works...". The left sidebar displays a collection of API endpoints under "TallerApiProductos". The main panel shows a GET request to "http://127.0.0.1:8000/api/productos" with a "Bearer Token" authorization. The response is a 200 OK status with a JSON body containing a list of products.

Request:

- Method: GET
- URL: http://127.0.0.1:8000/api/productos
- Auth Type: Bearer Token

Response:

```
1 <br />
2 <b>Deprecated</b>: Constant PDO: :MYSQL_ATTR_SSL_CA is deprecated since 8.5, use PDO\Mysql: :ATTR_SSL_CA
3 {
4   "message": "Listado de todos los productos",
5   "data": [
6     {
7       "id": 2,
8       "nombre": "Audifonos",
9       "precio": "20000.00",
10      "created_at": "2026-03-12T03:34:16.000000Z",
11      "updated_at": "2026-03-12T03:34:16.000000Z"
12    }
13  ]
14 }
```

4. Consultar un producto por id

The screenshot shows the Postman interface for the same workspace. The main panel shows a GET request to "http://127.0.0.1:8000/api/productos/2" with a "Bearer Token" authorization. The response is a 200 OK status with a JSON body containing a single product object.


Request:

- Method: GET
- URL: http://127.0.0.1:8000/api/productos/2
- Auth Type: Bearer Token


Response:

```
1 <br />
2 <b>Deprecated</b>: Constant PDO: :MYSQL_ATTR_SSL_CA is deprecated since 8.5, use PDO\Mysql: :ATTR_SSL_CA
3 {
4   "message": "Producto encontrado con id (2)",
5   "data": {
6     "id": 2,
7     "nombre": "Audifonos",
8     "precio": "20000.00",
9     "created_at": "2026-03-12T03:34:16.000000Z",
10     "updated_at": "2026-03-12T03:34:16.000000Z"
11   }
12 }
```

5. Actualizar productos

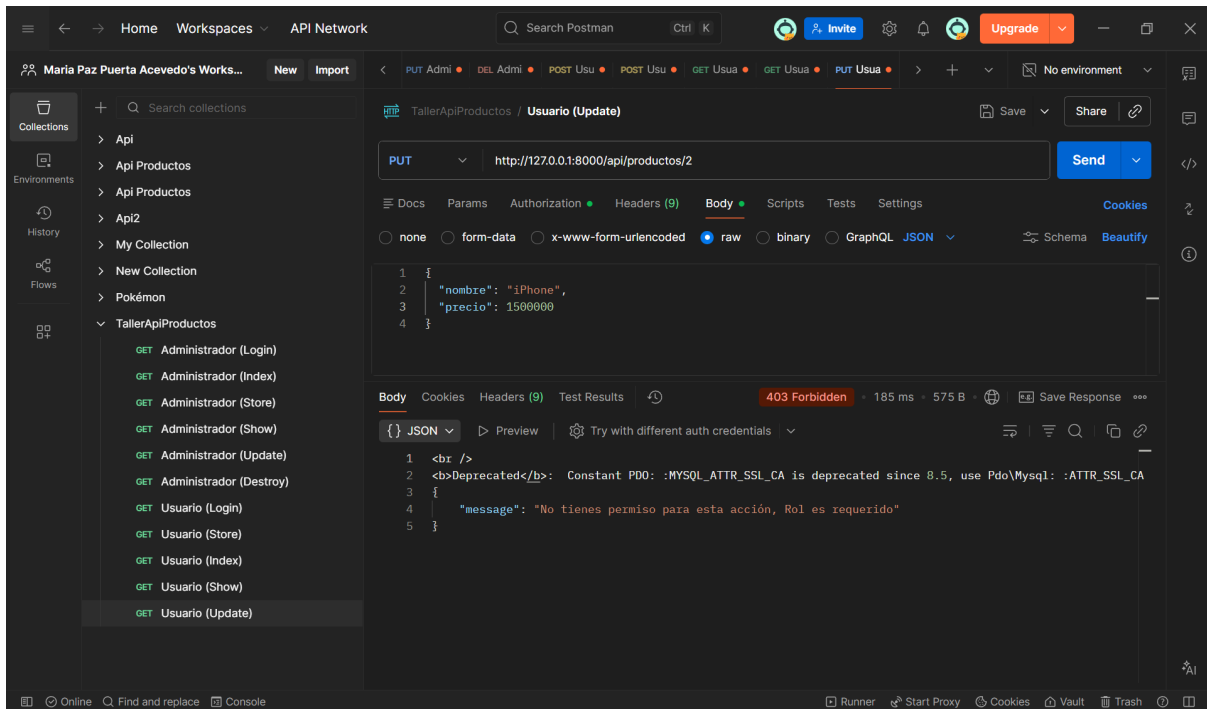


6. Eliminar productos

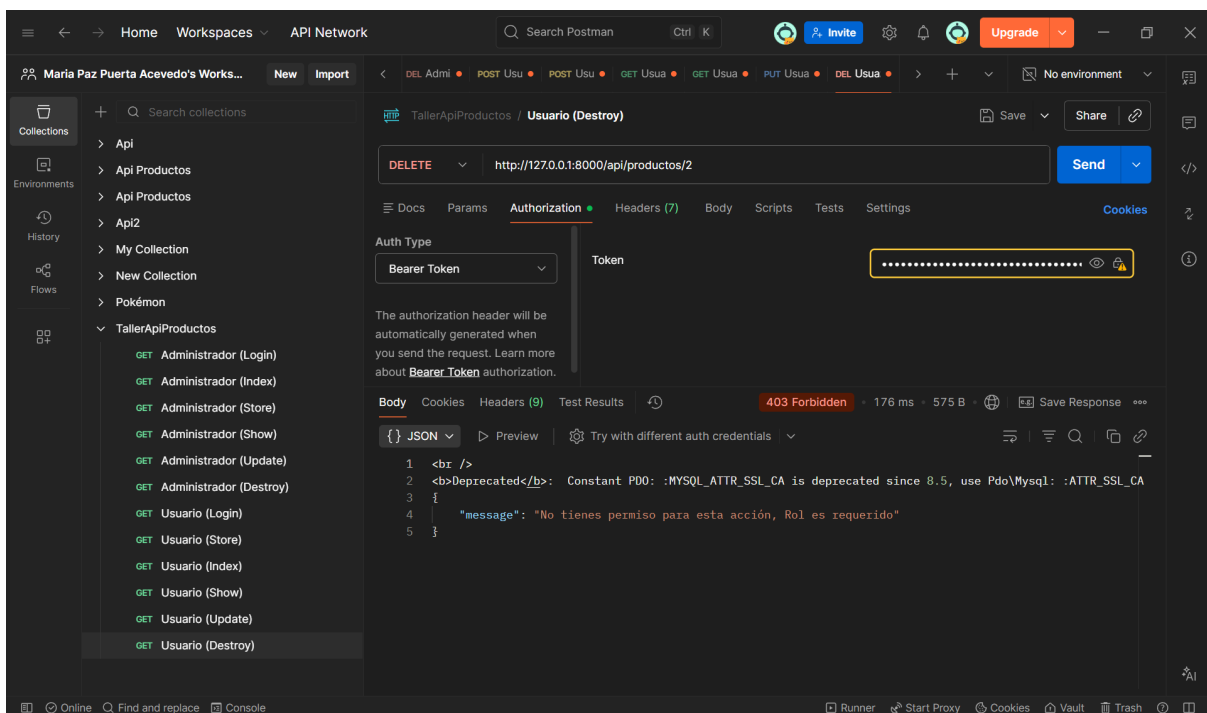


Operador


1. Login

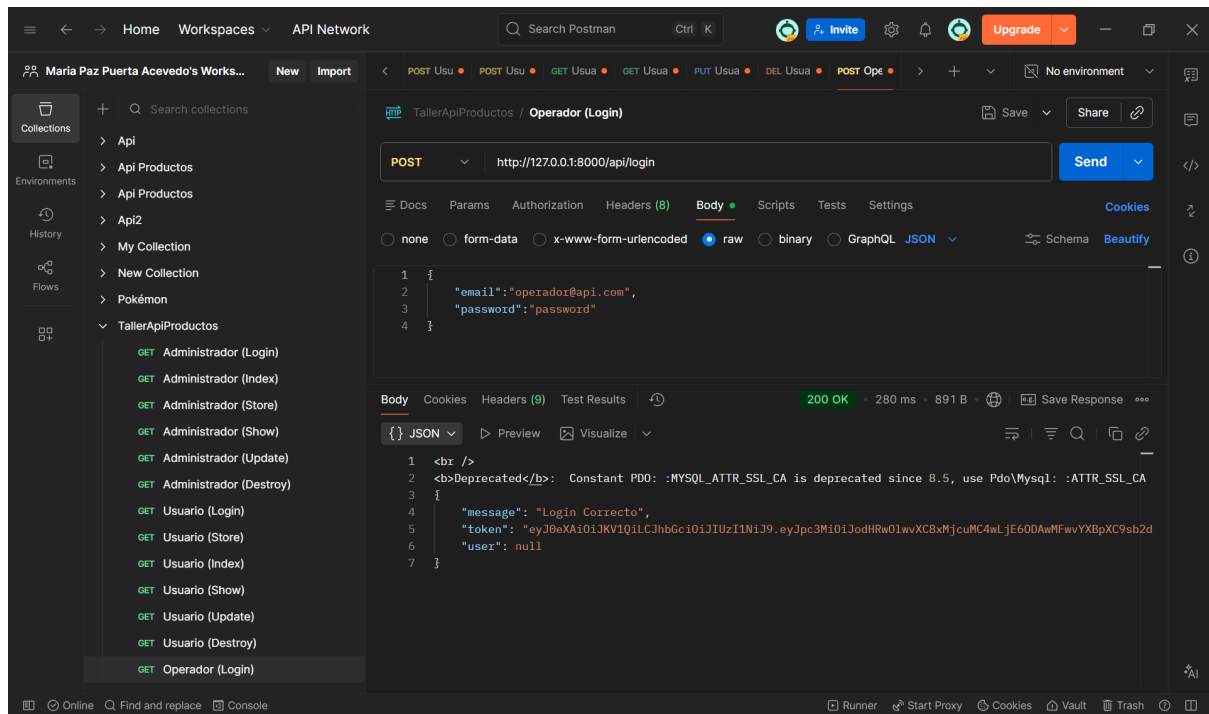


2. Crear productos

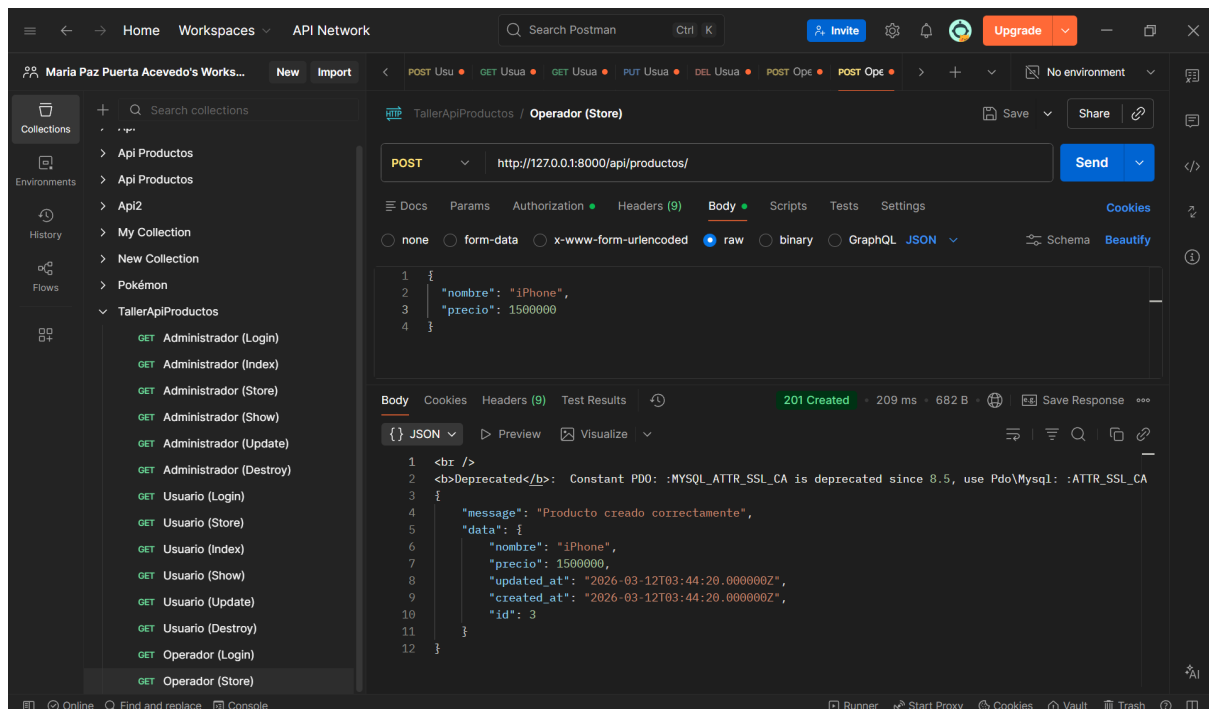

3. Consultar el listado

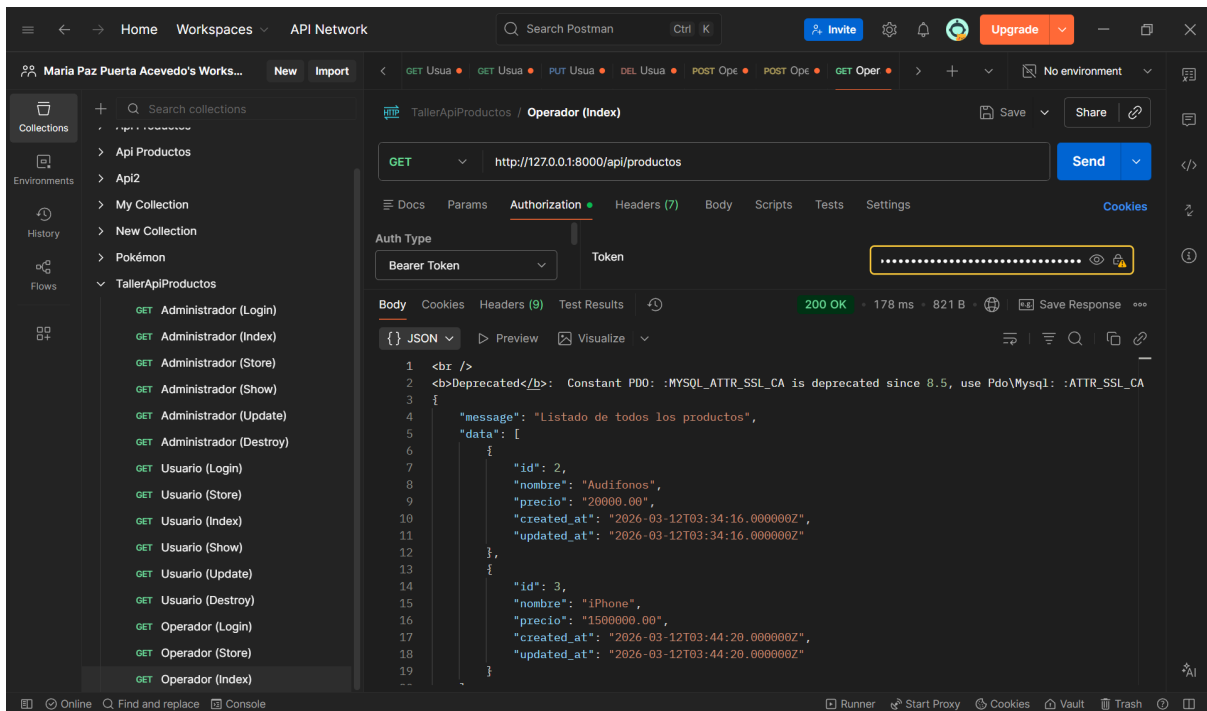

4. Consultar un producto por id

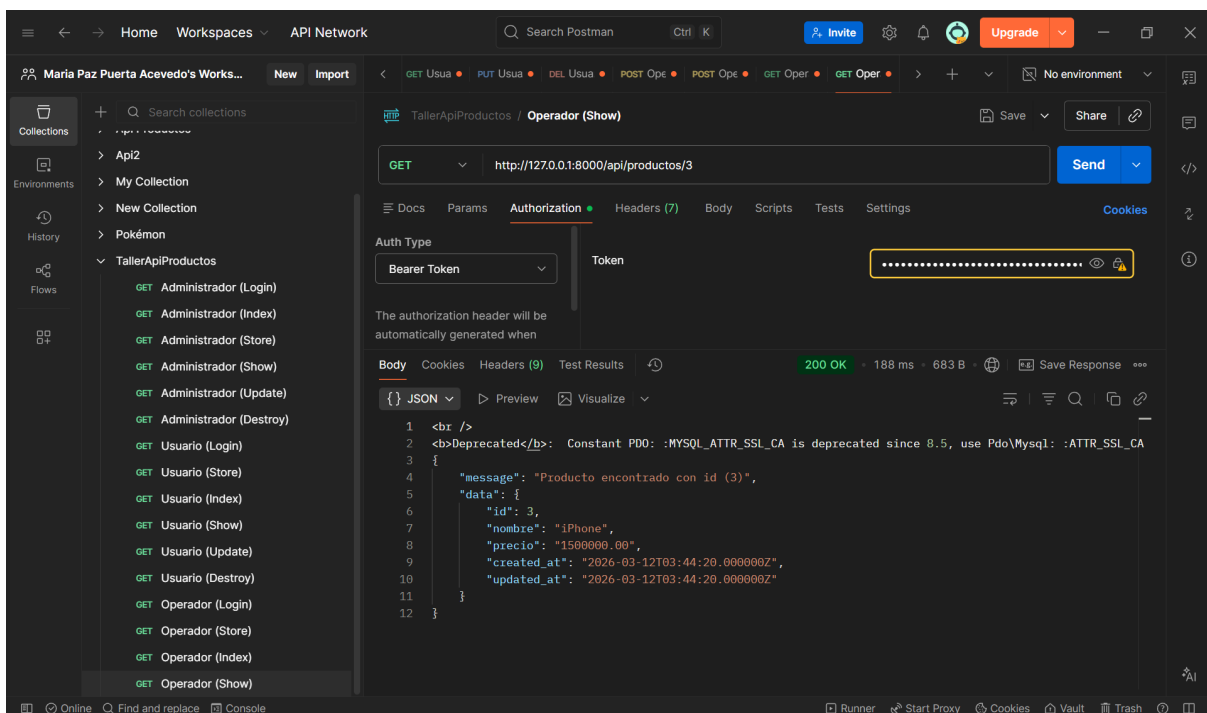

5. Actualizar productos

The screenshot shows the Postman interface with a workspace named 'Maria Paz Puerta Acevedo's Works...'. The left sidebar lists a collection named 'TallerApiProductos' containing various endpoints. The main panel displays a PUT request to 'http://127.0.0.1:8000/api/productos/3'. The request body is a JSON object:

```
{  "nombre": "Estuche",  "precio": 10000}
```

. The response is a 200 OK status with a 198 ms response time and 692 B of data. The response body is a JSON object:

```
{  "message": "Producto con id (3) actualizado correctamente",  "data": {    "id": 3,    "nombre": "Estuche",    "precio": 10000,    "created_at": "2026-03-12T03:44:20.000000Z",    "updated_at": "2026-03-12T03:51:28.000000Z"  }}
```

6. Eliminar productos

The screenshot shows the Postman interface with the same workspace. The left sidebar lists the 'TallerApiProductos' collection. The main panel displays a DELETE request to 'http://127.0.0.1:8000/api/productos/2'. The request is configured with 'Bearer Token' authentication. The response is a 403 Forbidden status with a 168 ms response time and 575 B of data. The response body is a JSON object:

```
{  "message": "No tienes permiso para esta acción, Rol es requerido"}
```

Todas las comprobaciones

