

Pattern Making Studies

A Parametric Approach to Flat Pattern Drafting with R

Your Name

2026-05-19

Contents

Preface	i
About This Book	i
Why Parametric Pattern Making?	i
Tools Used	i
How to Use This Book	i
Prerequisites	i
Acknowledgments	i
1 Notation Standards and Conventions	1
1.1 Measurement System	1
1.2 Coordinate System	1
1.3 Point Naming Conventions	1
1.4 Line Types and Meanings	2
1.5 Notches and Markings	2
1.6 Pattern Piece Information Block	3
1.7 Color Standards	3
1.8 Grid System	3
1.9 File Naming Conventions	4
1.10 Printing Standards	4
1.11 Measurement File Format	4
1.12 R Implementation Notes	4
1.13 References	5
2 Measurement Systems and Integration	6
2.1 Measurement Philosophy	6
2.2 SeamlyMe Integration	6
3 Required measurements for female bodice	8
4 Create reference table	9
5 Curso por Correspondência — Sophia Jobim	17
5.1 Blusa (Corpo Simples)	17

Preface

About This Book

This book documents my journey learning pattern making through a parametric, code-based approach. Rather than traditional paper drafting, I translate pattern making instructions into R code, creating:

- Reproducible patterns that adjust to any measurement set
- Fully annotated diagrams with all construction points visible
- A searchable reference of drafting techniques
- A record of errors, corrections, and learning insights

Why Parametric Pattern Making?

Traditional pattern making relies on manual drafting for each size and design. This approach:

1. **Eliminates manual grading:** Change measurements, regenerate the pattern
2. **Preserves design logic:** Every calculation is documented in code
3. **Enables experimentation:** Test design changes instantly
4. **Creates a knowledge base:** Build upon previous work systematically

Tools Used

- **R and R Markdown/Bookdown:** Documentation and computation
- **SeamlyMe:** Body measurement management
- **FreeSewing Notation:** Standard pattern marking symbols
- **Git/GitHub:** Version control and sharing

How to Use This Book

The book follows a structured learning path:

1. **Chapter 0:** Notation standards and conventions
2. **Chapter 1:** Measurement systems and file formats
3. **Chapters 2a-2f:** Basic blocks for different garments
4. **Chapter 3:** Design variations from basic blocks
5. **Chapter 4:** Real projects with iterations and corrections
6. **Chapter 5:** Reference tables and formulas

Prerequisites

- R (≥ 4.0) and RStudio
- LaTeX distribution (for PDF output)
- Basic understanding of garment construction
- Optional: SeamlyMe for measurement management

Acknowledgments

- FreeSewing.org for the notation system
- Traditional pattern making textbooks
- Open source community

1. Notation Standards and Conventions

This chapter defines all notation, terminology, and standards used throughout this pattern making documentation. Following these conventions ensures consistency across all pattern blocks and variations.

1.1. Measurement System

All measurements in this book use the **metric system** exclusively.


Unit	Abbreviation	Precision	Usage
Centimeter	cm	0.1	Body measurements, pattern dimensions, ease
Millimeter	mm	0.5	Notches, seam allowances, small details
Meter	m	0.01	Fabric length estimation only

Critical rule: Never mix measurement systems. All formulas assume centimeter inputs and return centimeter outputs.

1.2. Coordinate System

All patterns are drafted on a 2D Cartesian coordinate system following textile industry conventions:

- **Origin (0,0):** Bottom-left corner of the foundation rectangle (point D or C depending on orientation)
- **X-axis:** Horizontal, positive values extend to the right (pattern width)
- **Y-axis:** Vertical, positive values extend upward (pattern length/height)

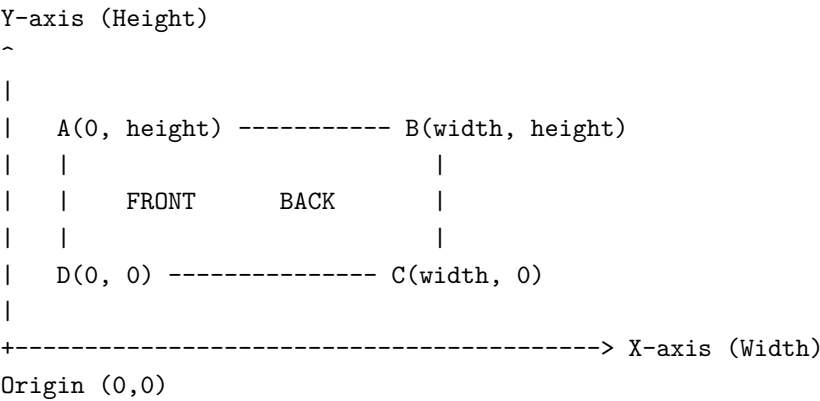

1.3. Point Naming Conventions

Construction points follow traditional pattern drafting conventions with letter designations:

1.3.1. Primary Structure Points (Foundation Rectangle)

Point	Description	Typical Position
A	Top-left corner	(0, height)
B	Top-right corner	(width, height)
C	Bottom-right corner	(width, 0)
D	Bottom-left corner	(0, 0)

1.3.2. Construction Division Points

Point	Description	Derivation
E, F	Side seam offset	A + offset, D + offset
G, H	Center/Armhole division	Midpoint of EB, FC
I, J, K, L	Front piece divisions	Divide AG into 4 equal parts

1.3.3. Pattern Feature Points

Category	Points	Represents
Neckline	N, Decote points	Front and back neckline curves
Shoulder	M, P, I, L	Shoulder seam endpoints
Armhole	Q, R, S, T, U, V, X, Y, Z	Sleeve cap curve control points
Darts	Various	Dart apex and legs
Waist/Hip	W, Hip points	Waistline and hip curve points

1.4. Line Types and Meanings

Based on the FreeSewing Notation System, adapted for R/ggplot2:

1.4.1. Structural Lines

Line Type	R Linetype	Color	Purpose
Seam line	solid	Black (#212121)	Actual sewing line
Seam allowance	dashed	Grey (#757575)	Fabric cutting line
Construction line	dotted	Light grey	Temporary guide lines
Grainline	dotted + arrow	Green (#388E3C)	Fabric grain direction
Cut-on-fold	twodash + arrows	Red (#D32F2F)	Place on fabric fold
Center line	dashed	Grey	Center front/back

1.4.2. Annotation Lines

Line Type	R Linetype	Color	Purpose
Dimension	dotted thin	Blue (#1565C0)	Measurement callouts
Note	dashed thin	Dark grey	Construction notes
Mark	solid thin	Various	Placement indicators
Contrast	solid colored	Cyan (#00BCD4)	Highlight specific areas
Help	dotted thin	Light grey	Assembly guides

1.5. Notches and Markings

1.5.1. Notch Types (FreeSewing Standard)

- **Front notch:** Circle with dot center – indicates front of garment
- **Back notch:** Circle with cross – indicates back of garment

1.5.2. Construction Marks

Symbol	R Implementation	Meaning
(.)	add_notch(type="front")	Front orientation
(+)	add_notch(type="back")	Back orientation
(o)	add_button()	Button placement
(	)	add_buttonhole()
-x-	add_bartack()	Reinforcement stitch
^	add_grainline()	Grain direction (arrow up)

1.6. Pattern Piece Information Block

Every pattern piece must include:

- 1. **Piece identifier:** Number and name (e.g., "1 – Front Bodice")
- 2. **Size:** Measurement set identifier
- 3. **Cutting instructions:** Quantity and fabric type
- 4. **Date:** Drafting date (ISO format: YYYY-MM-DD)
- 5. **Scale verification:** 5cm x 5cm test square

1.7. Color Standards

1.7.1. Fabric Type Colors

Color Name	Hex Code	R Variable	Usage
Primary fabric	#212121	fabric_primary	Main garment fabric
Lining	#1976D2	fabric_lining	Lining pieces
Interfacing	#F57C00	fabric_interfacing	Interfacing/fusing

1.7.2. Annotation Colors

Purpose	Hex Code	R Variable
Seam allowance	#757575	seam_allowance
Grainline	#388E3C	grainline
Cut on fold	#D32F2F	cut_on_fold
Dimensions	#1565C0	dimensions
Front notch	#212121	notch_default
Back notch	#D32F2F	notch_back

1.8. Grid System

All pattern plots include a reference grid for visual measurement:

- **Major grid lines:** Every 5 cm, solid light grey (#E0E0E0), linewidth 0.3
- **Minor grid lines:** Every 1 cm, very light grey (#F5F5F5), linewidth 0.1
- **Axis labels:** Centered on each major grid line

The grid serves as: - Quick visual reference for dimensions - Scale verification tool - Alignment guide for pattern pieces

1.9. File Naming Conventions

`{garment}_{block}_{version}_{size}.{ext}`

Examples:

```
bodice_front_female_v1.0_size48.pdf
sleeve_basic_v2.1_universal.csv
skirt_pencil_variation_v1.0_size42_A0.pdf
```

1.9.1. Version Numbering

- **Major** (X.0.0): Complete redraft or design change
- **Minor** (0.X.0): Significant adjustments to fit
- **Patch** (0.0.X): Small corrections, annotation fixes

1.10. Printing Standards

1.10.1. Scale Verification

Always print and measure the 5cm test square before cutting. If the square doesn't measure exactly 5cm x 5cm: 1. Check printer settings for "Actual size" (not "Fit to page") 2. Verify PDF scaling is set to 100% 3. Re-print if scale is off by more than 1mm

1.10.2. Paper Sizes

Format	Dimensions (cm)	Use Case
A4	21.0 x 29.7	Home printing (tiled)
A3	29.7 x 42.0	Small patterns
A0	84.1 x 118.9	Plotter, full patterns

1.10.3. Tile Assembly

For tiled home printing: 1. Trim along registration marks 2. Align matching marks between tiles 3. Tape from center outward 4. Verify scale after assembly

1.11. Measurement File Format

1.11.1. SeamlyMe CSV Structure

```
code,reference,description,value,formula
height,A01,Height: Total,154,154
bust_circ,G04,Bust circumference,113,113
```

1.11.2. Ease Parameters CSV Structure

```
parameter,value,unit,description
bust_ease,6,cm,Overall bust ease
shoulder_slope_front,4,cm,Front shoulder drop
```

1.12. R Implementation Notes

1.12.1. Function Naming

- `calc_*`: Pure mathematical calculations (distance, angle)
- `create_*`: Generate new objects (curves, plots)

- `add_*`: Modify existing plots with annotations
- `read_*` / `write_*`: File I/O operations
- `validate_*`: Check data integrity

1.12.2. Coordinate Storage

- Points stored as named vectors: `c(x, y)`
- Point collections as named lists: `list(A = c(0, 44), B = c(48, 44))`
- Plotted points as data frames: `data.frame(name, x, y)`

1.12.3. Cache Strategy

- All plots cached in `images/cache/`
- Cache invalidation based on parameter hash
- Manual cache clear: `delete images/cache/*.pdf`

1.13. References

- FreeSewing Notation Guide: <https://freesewing.eu/docs/about/notation/>
- ISO 8559: Garment construction and anthropometric surveys
- ABNT NBR 13377: Brazilian standard for garment sizes (where applicable)

2. Measurement Systems and Integration

This chapter covers how body measurements are captured, stored, and integrated into the parametric pattern drafting system. We use SeamlyMe as the primary measurement tool, but the system accepts any CSV following our format.

2.1. Measurement Philosophy

2.1.1. Body Measurements vs Pattern Measurements

Body measurements are taken directly from the body (or a dress form). They represent the actual dimensions of the person who will wear the garment.

Pattern measurements are body measurements plus ease. They represent the dimensions of the finished garment.

Pattern Measurement = Body Measurement + Ease

2.1.2. Types of Ease

Ease Type	Purpose	Example
Wearing ease	Minimum needed for movement and comfort	4-6 cm at bust
Design ease	Style choice affecting silhouette	Additional 10 cm for oversized look
Negative ease	Garment smaller than body (stretch fabrics)	-2 cm at bust for fitted knit

2.2. SeamlyMe Integration

SeamlyMe is open-source software for managing body measurements. It exports measurements in a CSV format we can read directly.

2.2.1. Export Process from SeamlyMe

1. Open your measurement file (.vit) in SeamlyMe
2. Go to **Measurements** → **Export to CSV**
3. Select all measurements needed for the pattern
4. Save the CSV to data/measurements/

2.2.2. SeamlyMe CSV Format

```
code,reference,description,value,formula
height,A01,Height: Total,154,154
bust_circ,G04,Bust circumference,113,113
neck_front_to_waist_f,H01,Neck Front to Waist Front,58,58
```

Columns explained:

code: Internal identifier used in our R code (e.g., bust_circ)

reference: SeamlyMe reference code (e.g., G04)

description: Human-readable description

value: The actual measurement in centimeters

formula: Can be a fixed value or a formula referencing other measurements

Required Measurements by Block Type

Female Bodice Block Requirements

3. Required measurements for female bodice

```
female_bodice_required <- c(  
  "height",  
  "bust_circ",  
  "neck_front_to_waist_f",  
  "back_waist_length",  
  "shoulder_length",  
  "armscye_circ",  
  "neck_width",  
  "across_chest_f",  
  "bustpoint_to_bustpoint",  
  "bustpoint_to_neck_side"  
)
```

4. Create reference table

```
reqs_df <- data.frame(
  Code = female_bodice_required,
  Description = c(
    "Total height",
    "Bust circumference",
    "Front waist length (neck to waist)",
    "Back waist length",
    "Shoulder length",
    "Armscye circumference",
    "Neck width",
    "Across chest (front)",
    "Bust point to bust point",
    "Bust point to neck side"
  ),
  Category = c("Reference", "Circumference", "Length", "Length",
    "Length", "Circumference", "Width", "Width",
    "Width", "Length")
)

knitr::kable(reqs_df,
  caption = "Required measurements for female bodice block",
  booktabs = TRUE) %>%
  kable_styling(latex_options = c("hold_position", "striped"))
```

Male Bodice Block Requirements

```
male_bodice_required <- c(
  "height",
  "chest_circ",
  "neck_front_to_waist_f",
  "back_waist_length",
  "shoulder_length",
  "armscye_circ",
  "neck_width",
  "across_back",
  "across_chest_m"
)

reqs_male_df <- data.frame(
  Code = male_bodice_required,
  Description = c(
    "Total height",
    "Chest circumference",
    "Front waist length",
    "Back waist length",
    "Shoulder length",
    "Armscye circumference",
    "Neck width",

```

```

    "Across back width",
    "Across chest (male)"
  ),
  Category = c("Reference", "Circumference", "Length", "Length",
               "Length", "Circumference", "Width", "Width", "Width")
)

knitr::kable(reqs_male_df,
             caption = "Required measurements for male bodice block",
             booktabs = TRUE) %>%
  kable_styling(latex_options = c("hold_position", "striped"))

```

Skirt Block Requirements

```

skirt_required <- c(
  "waist_circ",
  "hip_circ",
  "waist_to_hip",
  "waist_to_knee",
  "height"
)

reqs_skirt_df <- data.frame(
  Code = skirt_required,
  Description = c(
    "Waist circumference",
    "Hip circumference",
    "Waist to hip distance",
    "Waist to knee distance",
    "Total height"
  ),
  Category = c("Circumference", "Circumference", "Length", "Length", "Reference")
)

knitr::kable(reqs_skirt_df,
             caption = "Required measurements for skirt block",
             booktabs = TRUE) %>%
  kable_styling(latex_options = c("hold_position", "striped"))

```

Table 4.1: Required measurements for skirt block

Code	Description	Category
waist_circ	Waist circumference	Circumference
hip_circ	Hip circumference	Circumference
waist_to_hip	Waist to hip distance	Length
waist_to_knee	Waist to knee distance	Length
height	Total height	Reference

Sleeve Block Requirements

```
sleeve_required <- c(
  "armscye_circ",
  "arm_upper_circ",
  "arm_elbow_circ",
  "arm_wrist_circ",
  "arm_shoulder_tip_to_wrist",
  "arm_shoulder_tip_to_elbow",
  "arm_armpit_to_wrist"
)

reqs_sleeve_df <- data.frame(
  Code = sleeve_required,
  Description = c(
    "Armscye circumference",
    "Upper arm circumference",
    "Elbow circumference",
    "Wrist circumference",
    "Shoulder to wrist length",
    "Shoulder to elbow length",
    "Armpit to wrist (inside)"
  ),
  Category = c("Circumference", "Circumference", "Circumference",
    "Circumference", "Length", "Length", "Length")
)

knitr::kable(reqs_sleeve_df,
  caption = "Required measurements for sleeve block",
  booktabs = TRUE) %>%
  kable_styling(latex_options = c("hold_position", "striped"))
```

Table 4.2: Required measurements for sleeve block

Code	Description	Category
armscye_circ	Armscye circumference	Circumference
arm_upper_circ	Upper arm circumference	Circumference
arm_elbow_circ	Elbow circumference	Circumference
arm_wrist_circ	Wrist circumference	Circumference
arm_shoulder_tip_to_wrist	Shoulder to wrist length	Length
arm_shoulder_tip_to_elbow	Shoulder to elbow length	Length
arm_armpit_to_wrist	Armpit to wrist (inside)	Length

Pants Block Requirements

```
pants_required <- c(
  "waist_circ",
  "hip_circ",
  "waist_to_hip",
  "crotch_depth",
  "inseam",
  "outseam",
  "thigh_circ",
  "knee_circ",
```

```

    "ankle_circ"
  )

reqs_pants_df <- data.frame(
  Code = pants_required,
  Description = c(
    "Waist circumference",
    "Hip circumference",
    "Waist to hip distance",
    "Crotch depth (sitting)",
    "Inseam length",
    "Outseam length",
    "Thigh circumference",
    "Knee circumference",
    "Ankle circumference"
  ),
  Category = c("Circumference", "Circumference", "Length",
    "Length", "Length", "Length", "Circumference",
    "Circumference", "Circumference")
)

knitr::kable(reqs_pants_df,
  caption = "Required measurements for pants block",
  booktabs = TRUE) %>%
  kable_styling(latex_options = c("hold_position", "striped"))

```

Table 4.3: Required measurements for pants block

Code	Description	Category
waist_circ	Waist circumference	Circumference
hip_circ	Hip circumference	Circumference
waist_to_hip	Waist to hip distance	Length
crotch_depth	Crotch depth (sitting)	Length
inseam	Inseam length	Length
outseam	Outseam length	Length
thigh_circ	Thigh circumference	Circumference
knee_circ	Knee circumference	Circumference
ankle_circ	Ankle circumference	Circumference

Loading Measurements in R

The `read_measurements()` Function

```

# Source measurement functions
# source(here::here("Rscripts", "measurement_io.R"))

# Load a measurement file
fem48 <- read_measurements(here::here("data", "measurements", "female_size48.csv"))

# Display key measurements
key_codes <- c("height", "bust_circ", "neck_front_to_waist_f", "shoulder_length")

cat("Key measurements for female size 48:\n")

```

Key measurements for female size 48:

```
for (code in key_codes) {
  cat(sprintf("  %-30s: %6.1f cm\n", code, m_get(fem48, code)))
}
```

```
## height : 154.0 cm
## bust_circ : 113.0 cm
## neck_front_to_waist_f : 58.0 cm
## shoulder_length : 10.5 cm
```

Creating a Measurement Template

If you don't have SeamlyMe, you can create a template CSV and fill in values manually:

```
# Create template for manual editing
create_measurement_template(
  filepath = "data/measurements/custom_measurements.csv",
  codes = c("height", "bust_circ", "waist_circ", "hip_circ",
            "neck_front_to_waist_f", "back_waist_length",
            "shoulder_length", "armscye_circ", "neck_width")
)
```

Template created: data/measurements/custom_measurements.csv

Measurement Validation

Checking Required Measurements

```
# Validate that all required measurements are present
tryCatch({
  validate_measurements(fem48, female_bodice_required)
  cat(" All required measurements present\n")
}, error = function(e) {
  cat(" ", e$message, "\n")
})
```

objeto 'female_bodice_required' não encontrado

```
# Check for zero values (likely unfilled)
zero_measurements <- names(fem48)[fem48 == 0]
if (length(zero_measurements) > 0) {
  cat("\n Zero values found in:", paste(zero_measurements, collapse = ", "))
  cat("\n These should be measured and filled in before drafting.\n")
}
```

```
# Logical consistency checks
checks <- list()
```

```
# Waist should be smaller than bust
if (!is.null(fem48$waist_circ) && !is.null(fem48$bust_circ)) {
  checks$waist_vs_bust <- fem48$waist_circ < fem48$bust_circ
}
```



```

# Hip should be larger than waist
if (!is.null(fem48$hip_circ) && !is.null(fem48$waist_circ)) {
  checks$hip_vs_waist <- fem48$hip_circ > fem48$waist_circ
}

# Arm length checks
if (!is.null(fem48$arm_shoulder_tip_to_wrist) &&
    !is.null(fem48$arm_shoulder_tip_to_elbow)) {
  checks$arm_segments <- fem48$arm_shoulder_tip_to_elbow <
    fem48$arm_shoulder_tip_to_wrist
}

cat("Consistency checks:\n")

```

Consistency checks:

```

for (check_name in names(checks)) {
  status <- if (checks[[check_name]]) " " else " "
  cat(sprintf("  %s %s\n", status, check_name))
}

```

```

##      waist_vs_bust
##      hip_vs_waist
##      arm_segments

```

Ease Parameters

Ease parameters are stored separately from body measurements.

This separation allows:

Changing body measurements without affecting design decisions

Experimenting with different fits on the same body

Sharing ease settings across measurement sets

Ease Parameters File Format

```

# Read ease parameters
bodice_ease <- read_ease(here::here("data", "parameters", "bodice_ease_female.csv"))

# Display as table
ease_df <- data.frame(
  Parameter = names(bodice_ease),
  Value = paste(unlist(bodice_ease), "cm"),
  Description = c(
    "Overall bust circumference ease",
    "Waist circumference ease",
    "Hip circumference ease",
    "Front shoulder drop from J point",
    "Back neckline drop from B",

```

```

    "Reference armscye depth",
    "Front neckline lateral shift",
    "Back neckline lateral shift",
    "Back shoulder dart height",
    "Back shoulder extension",
    "Side seam horizontal offset"
  )
)

knitr::kable(ease_df,
  caption = "Female bodice ease parameters",
  booktabs = TRUE) %>%
  kable_styling(latex_options = c("hold_position", "striped"))

```

Ease by Garment Type and Fit Garment Close Fit Semi-Fit Loose Fit Oversized Bodice bust 4-6 cm 6-8 cm 8-12 cm 12-20 cm Bodice waist 2-4 cm 4-6 cm 6-10 cm 10-16 cm Skirt hip 2-4 cm 4-6 cm 6-8 cm 8-12 cm Pants hip 2-4 cm 4-6 cm 6-8 cm — Sleeve biceps 2-4 cm 4-6 cm 6-8 cm 8-12 cm Standard Size Reference Tables Female Standard Measurements (ABNT NBR 13377)

```

female_standard <- data.frame(
  Size = c("38", "40", "42", "44", "46", "48", "50"),
  Bust = c(84, 88, 92, 96, 102, 108, 114),
  Waist = c(64, 68, 72, 76, 82, 88, 94),
  Hip = c(92, 96, 100, 104, 110, 116, 122),
  Neck_to_Waist_F = c(44, 45, 46, 47, 48, 50, 52),
  Back_Waist = c(38, 39, 40, 41, 42, 43, 44)
)

knitr::kable(female_standard,
  caption = "Standard female measurements (cm) - Reference only",
  booktabs = TRUE) %>%
  kable_styling(latex_options = c("hold_position", "striped"))

```

Table 4.4: Standard female measurements (cm) — Reference only

Size	Bust	Waist	Hip	Neck_to_Waist_F	Back_Waist
38	84	64	92	44	38
40	88	68	96	45	39
42	92	72	100	46	40
44	96	76	104	47	41
46	102	82	110	48	42
48	108	88	116	50	43
50	114	94	122	52	44

Male Standard Measurements

```

male_standard <- data.frame(
  Size = c("46", "48", "50", "52", "54", "56"),
  Chest = c(92, 96, 100, 104, 108, 112),
  Waist = c(78, 82, 86, 90, 96, 102),
  Hip = c(94, 98, 102, 106, 110, 114),
  Back_Waist = c(44, 45, 46, 47, 48, 49)
)

```

```
knitr::kable(male_standard,
  caption = "Standard male measurements (cm) - Reference only",
  booktabs = TRUE) %>%
  kable_styling(latex_options = c("hold_position", "striped"))
```

Table 4.5: Standard male measurements (cm) — Reference only

Size	Chest	Waist	Hip	Back_Waist
46	92	78	94	44
48	96	82	98	45
50	100	86	102	46
52	104	90	106	47
54	108	96	110	48
56	112	102	114	49

Practical Measurement Tips Taking Body Measurements

Use a flexible tape measure - not a metal one

Measure over undergarments - or the clothing layer the garment will be worn over

Keep the tape parallel to the floor - especially for circumferences

Don't pull too tight - the tape should be snug but not compressing

Mark landmarks - use elastic bands to mark waist, hip, and bust levels

Take multiple measurements - average three readings for accuracy

Record posture - note if the subject has forward shoulders, sway back, etc.

Measurement Landmarks Landmark How to Find Waist level Side bend — where the body creases Hip level Widest part of hips, usually 18-22 cm below waist Bust point Apex of bust (nipple level) Neck base Where neck meets shoulder Shoulder tip Acromion bone (bony point at shoulder edge) Elbow Olecranon process (bony point of elbow) Wrist Styloid process (bony bump at wrist)

Chapter Summary

All measurements in centimeters, stored in SeamlyMe CSV format

Measurements are validated for presence and consistency before drafting

Ease parameters are stored separately for flexibility

Standard size tables provided for reference only - use actual body measurements when possible

Each block type has specific measurement requirements documented above

5. Curso por Correspondência — Sophia Jobim

Referência: JOBIM, Sophia. *O sistema de corte e costura de Sophia Jobim: os anos de ouro de Mme Carvalho no Liceu Império: 1932-1954*. São Paulo: Portal de Livros Abertos da USP, 2024. Disponível em: <https://www.livrosabertos.abcd.usp.br/portaldelivrosUSP/catalog/view/1327/1210/4651>

Este capítulo documenta o estudo do método de modelagem de Sophia Jobim, transcrevendo as instruções originais e implementando-as em código R parametrizado.

5.1. Blusa (Corpo Simples)

Página de referência: ~111 do PDF original

5.1.1. Dados de Entrada

O método Sophia Jobim começa estabelecendo as medidas base e os parâmetros de folga. O livro usa como exemplo o manequim 48 com busto de 90 cm. A folga de 6 cm no busto é uma recomendação da autora para que a blusa não fique justa como um colete. As demais medidas (comprimento frente, costas e grossura do braço) são necessárias para posicionar a cava e determinar o comprimento total da peça.

5.1.1.1. Medidas do Manequim 48

```
medidas_sj <- read_measurements(here("data", "measurements", "sophia_jobim_size48.csv"))

medida_busto <- m_get(medidas_sj, "bust_circ")
comp_frente <- m_get(medidas_sj, "neck_front_to_waist_f")
comp_costas <- m_get(medidas_sj, "back_waist_length")
grossura_braco <- m_get(medidas_sj, "armscye_circ")

medidas_df <- data.frame(
  Codigo = c("bust_circ", "neck_front_to_waist_f", "back_waist_length", "armscye_circ"),
  Descricao = c("Circunferencia do busto", "Comprimento frente", "Comprimento costas", "Grossura do braço"),
  Valor_cm = c(medida_busto, comp_frente, comp_costas, grossura_braco)
)

knitr::kable(medidas_df,
  caption = "Medidas do manequim 48 (Sophia Jobim)",
  booktabs = TRUE) %>%
  kable_styling(latex_options = c("hold_position", "striped"))
```

Table 5.1: Medidas do manequim 48 (Sophia Jobim)

Codigo	Descricao	Valor_cm
bust_circ	Circunferencia do busto	90
neck_front_to_waist_f	Comprimento frente	44
back_waist_length	Comprimento costas	41
armscye_circ	Grossura do braço	33

5.1.1.2. Parametros de Folga e Construc o

Os parâmetros de folga e construção são valores fixos que a autora determina com base na experiência. O deslocamento de 3 cm para as costas (EF) é uma característica do método: a frente é sempre mais larga que as costas. A descida do ombro (4 cm) e a

profundidade extra do decote (2 cm) são valores empíricos que funcionam para a maioria dos corpos. As bisettrizes da cava (1.5 cm em R, 2.5 cm em S) controlam a curvatura da cava — valores maiores deixam a cava mais aberta.

```
ease_sj <- read_ease(here("data", "parameters", "sophia_jobim_ease.csv"))
```

```
## Warning: One or more parsing issues, call `problems()` on your data frame for details, e.g.:
##   dat <- vroom(...)
##   problems(dat)
```

```
ease_df <- data.frame(
  Parametro = names(ease_sj),
  Valor = paste(unlist(ease_sj), "cm")
)

knitr::kable(ease_df,
  caption = "Parametros de folga e construcao (Sophia Jobim)",
  booktabs = TRUE) %>%
  kable_styling(latex_options = c("hold_position", "striped"))
```

Table 5.2: Parametros de folga e construcao (Sophia Jobim)

Parametro	Valor
bust_ease	6 cm
side_seam_offset	3 cm
shoulder_slope_front	4 cm
front_neckline_depth_extra	2 cm
front_neckline_shift	1 cm
back_neck_drop	2 cm
back_neckline_shift	1 cm
back_dart_height	5 cm
back_shoulder_extension	1 cm
bisetriz_R	1.5 cm
bisetriz_S	2.5 cm
desvio_V_esquerda	2 cm
desvio_X_esquerda	0.5 cm
subida_inferior	3 cm
desvio_W_lateral	2 cm

5.1.1.3. Tabela de Profundidade da Cava

A profundidade da cava não é um valor fixo — depende da grossura do braço. O livro fornece uma tabela (Tabela 1) que relaciona a circunferência do braço com a profundidade da cava. Para o manequim 48, o braço tem 33 cm de circunferência, o que corresponde a uma cava de 21 cm de profundidade. O código localiza esse valor na tabela e, se necessário, interpola para medidas intermediárias.

```
tabela_cava <- read_csv(here("data", "measurements", "sophia_jobim_armscye_table.csv"),
  show_col_types = FALSE)

profundidade_cava <- tabela_cava$armscye_depth[tabela_cava$arm_circ == grossura_braco]

if (length(profundidade_cava) == 0) {
  profundidade_cava <- approx(tabela_cava$arm_circ, tabela_cava$armscye_depth,
    xout = grossura_braco)$y
}
```

```
tabela_cava$Destaque <- ifelse(tabela_cava$arm_circ == grossura_braco, "<- USADO", "")

knitr::kable(tabela_cava,
  caption = "Tabela 1: Profundidade da cava conforme grossura do braco",
  booktabs = TRUE) %>%
  kable_styling(latex_options = c("hold_position", "striped"))
```

Table 5.3: Tabela 1: Profundidade da cava conforme grossura do braco

arm_circ	armscye_depth	Destaque
29	18.0	
30	19.0	
31	19.5	
32	20.0	
33	21.0	<- USADO
34	22.0	
35	22.5	
36	23.0	
37	23.5	
38	24.0	
39	24.5	
40	25.0	
41	25.5	
42	26.0	
43	26.5	
44	27.0	
45	27.5	
46	28.0	

```
cat(sprintf("\n**Braco:** %.0f cm -> **Profundidade da cava:** %.0f cm\n",
  grossura_braco, profundidade_cava))
```

```
##
## **Braco:** 33 cm -> **Profundidade da cava:** 21 cm
```

5.1.2. Geracao do Bloco Base

Com os dados carregados, executamos o traçado completo. A função `draft_blouse_sj()` implementa todos os 13 passos do método Sophia Jobim: retângulo base, deslocamento das costas, divisões da frente e costas, ombros, decotes, cava com bisetrizes e pontos médios, e parte inferior com subida da barra.

O resultado é salvo como arquivo `.rds` para que possa ser reutilizado posteriormente sem precisar recalculá-lo — útil para gerar variações de design a partir do mesmo bloco base.

```
blusa <- draft_blouse_sj(
  medidas = medidas_sj,
  ease = ease_sj,
  armscye_depth = profundidade_cava
)

save_block(blusa, "blusa_sj_size48")
```

```
## Block saved: M:/DATA/R-files/Garments_planner/output/blocks/blusa_sj_size48.rds
```

```
## [1] "M:/DATA/R-files/Garments_planner/output/blocks/blusa_sj_size48.rds"
```

```
cat(sprintf("
**Dimensoes do molde:**
- Largura total: %.1f cm
- Altura total: %.1f cm
- Divisao da frente: %.1f cm
- Divisao das costas: %.1f cm
", blusa$dimensions$dim_width,
  blusa$dimensions$dim_height,
  blusa$dimensions$dim_front_division,
  blusa$dimensions$dim_back_division))
```

```
##
## **Dimensoes do molde:**
## - Largura total: 48.0 cm
## - Altura total: 44.0 cm
## - Divisao da frente: 6.4 cm
## - Divisao das costas: 5.6 cm
```

5.1.3. Molde Completo

O grafico mostra o molde completo com frente (azul) e costas (laranja) sobrepostas no retangulo base. As linhas tracejadas indicam as linhas de construcao (deslocamento EF, centro GH, linha da cava RS). Os pontos seguem a notacao original do livro (A, B, C, D...).

A cava e desenhada com spline cubica parametrica — metodo escolhido apos testes comparativos (ver Nota Tecnica abaixo). A curva passa exatamente sobre os 7 pontos de controle (P, Z, U, Q, T, Y, M) com maxima suavidade matematica.

```
# Gerar grafico a partir do .rds
plot_file <- plot_from_rds(
  block_name = "blusa_sj_size48",
  output_filename = "blusa_sj_temp",
  title = "Blusa (Corpo Simples) - Metodo Sophia Jobim",
  subtitle = paste("Manequim 48 | Busto:", medida_busto, "cm"),
  show_points = TRUE,
  show_grid = TRUE,
  piece_type = "both",
  width = 7,
  height = 7
)
```

```
## Block loaded: M:/DATA/R-files/Garments_planner/output/blocks/blusa_sj_size48.rds
```

```
## Plot saved: M:/DATA/R-files/Garments_planner/images/cache/blusa_sj_temp.png
```

```
# Salvar na estrutura images/ANO/MES e gerar tag markdown
save_pattern_image(plot_file, "blouse_sophia_j")
```

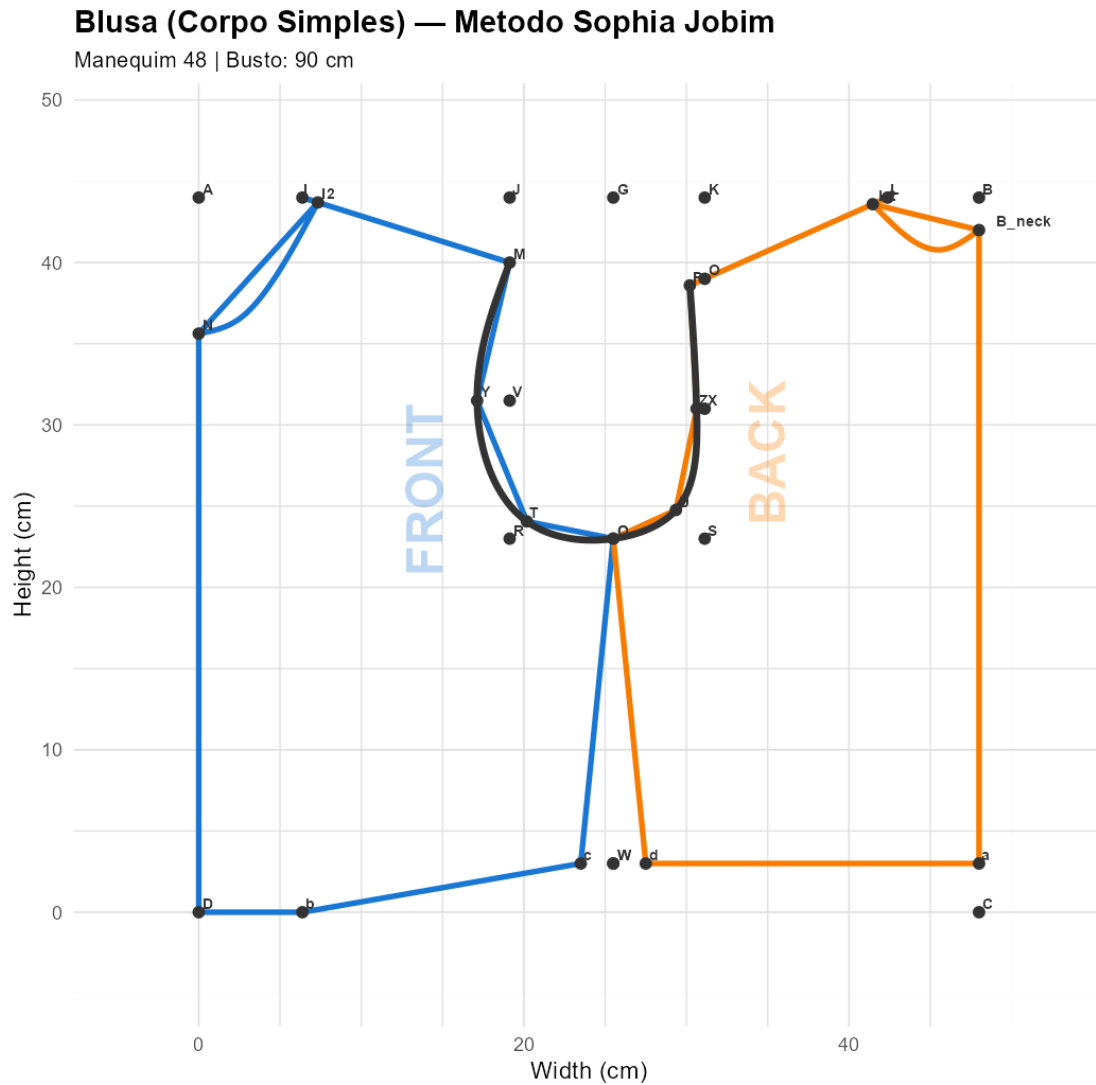


Figure 5.1: blouse_sophia_j

Image saved: M:/DATA/R-files/Garments_planner/images/2026/05-mai/2026-05-19_19h51--blouse_sophia_j.png

5.1.4. Comprimento das Linhas

A tabela abaixo lista o comprimento de cada segmento que delimita o molde. Estes valores são úteis para: - Conferir se o traçado está proporcional - Comparar com medidas corporais (ex: ombro do molde vs ombro medido) - Calcular o comprimento de costura para aviamentos

```
comprimentos_df <- data.frame(
  Segmento = c(
    "Ombro frente (I-M)",
    "Decote frente (curva N-I2)",
    "Ombro costas (L-P)",
    "Decote costas (curva B'-L2)",
    "Cava (curva P-M)",
    "Lateral frente (Q-c)",
    "Lateral costas (Q-d)",
    "Cintura frente (c-b)",
  )
)
```



```

"Cintura costas (d-a)",
"Barra frente (b-D)",
"Centro frente (D-N)",
"Centro costas (a-B')",
),
Comprimento_cm = round(c(
  blusa$line_lengths$shoulder_front_IM,
  blusa$line_lengths$neckline_front,
  blusa$line_lengths$shoulder_back_LP,
  blusa$line_lengths$neckline_back,
  blusa$line_lengths$armscye,
  blusa$line_lengths$side_front_Qc,
  blusa$line_lengths$side_back_Qd,
  blusa$line_lengths$waist_front_cb,
  blusa$line_lengths$waist_back_da,
  blusa$line_lengths$hem_front_bD,
  blusa$line_lengths$center_front_DN,
  blusa$line_lengths$center_back_aB
), 1)
)

knitr::kable(comprimentos_df,
  caption = "Comprimento das linhas que delimitam o molde",
  booktabs = TRUE) %>%
  kable_styling(latex_options = c("hold_position", "striped"))

```

Table 5.4: Comprimento das linhas que delimitam o molde

Segmento	Comprimento_cm
Ombro frente (I-M)	13.4
Decote frente (curva N-I2)	11.4
Ombro costas (L-P)	13.3
Decote costas (curva B'-L2)	7.9
Cava (curva P-M)	41.1
Lateral frente (Q-c)	20.1
Lateral costas (Q-d)	20.1
Cintura frente (c-b)	17.4
Cintura costas (d-a)	20.5
Barra frente (b-D)	6.4
Centro frente (D-N)	35.6
Centro costas (a-B')	39.0

5.1.5. Área Aproximada para Cálculo de Tecido

A área é calculada pelo método do polígono (fórmula de Shoelace) usando apenas os pontos do contorno, sem considerar as curvas. Isso dá uma estimativa rápida e suficiente para compra de tecido. A nota no final lembra de adicionar 10-15% para margens de costura e curvas.

```

area_info <- blusa$area

area_df <- data.frame(

```

```
Peca = c("Frente", "Costas", "Total (2 pecas)"),
Area_cm2 = c(area_info$front_area_cm2, area_info$back_area_cm2, area_info$total_area_cm2),
Area_m2 = c(area_info$front_area_m2, area_info$back_area_m2, area_info$total_area_m2)
)

knitr::kable(area_df,
  caption = "Area aproximada das pecas do molde",
  booktabs = TRUE) %>%
  kable_styling(latex_options = c("hold_position", "striped"))
```

Table 5.5: Area aproximada das pecas do molde

Peca	Area_cm2	Area_m2
Frente	871.2419	0.0871242
Costas	767.7236	0.0767724
Total (2 pecas)	1638.9655	0.1638965

```
cat(sprintf("
**Estimativa de tecido:**
- Area total do molde (frente + costas): %.2f m2
- Com margem de 15%% para curvas e costuras: %.2f m2
- Tecido recomendado (largura 1.40 m): %.2f m linear

> **Nota:** %s
", area_info$total_area_m2,
  area_info$total_area_m2 * 1.15,
  (area_info$total_area_m2 * 1.15) / 1.40,
  area_info$note))

##
## **Estimativa de tecido:**
## - Area total do molde (frente + costas): 0.16 m2
## - Com margem de 15% para curvas e costuras: 0.19 m2
## - Tecido recomendado (largura 1.40 m): 0.13 m linear
##
## > **Nota:** Area aproximada. Adicionar 10-15% para margens e curvas.
```

5.1.6. Exportar para Tamanho Real

Para imprimir o molde em tamanho real (para corte em tecido), use a função `plot_pattern_fullscale()`. O formato A0 comporta a maioria dos moldes. Para impressão caseira em A4, use `plot_pattern_tiled()` que gera tiles com marcas de registro para colagem.

```
plot_pattern_fullscale(
  block = blusa,
  output_file = "output/blusa_corpo_simples_A0.pdf",
  paper_size = "A0"
)
```

5.1.7. Nota Técnica: Escolha do Método para a Curva da Cava

Durante o desenvolvimento, testamos 4 métodos para desenhar a curva da cava a partir dos 7 pontos (P, Z, U, Q, T, Y, M):

1. Spline com pontos de controle manuais

Tentativa de ajustar a curva usando pontos de controle arbitrários. Resultado: zigue-zague e barriga invertida no decote. Descartado por falta de controle sobre o formato.

2. Bezier cubica por segmentos

Dois segmentos (frente: M-Y-T-Q, costas: Q-U-Z-P) com pontos de controle calculados para $t=1/3$ e $t=2/3$. Resultado: passou sobre os pontos mas apresentou transição brusca em Q. Descartado por falta de suavidade na junção.

3. LOESS (Local Polynomial Regression)

Regressão polinomial local com span entre 0.3 e 0.7. Resultado: curvas muito suaves e orgânicas, mas não passam exatamente sobre os pontos intermediários (Z, U, T, Y). Descartado por não respeitar os pontos de construção.

4. Spline cubica paramétrica (ESCOLHIDO)

Spline cúbica natural usando distância acumulada como parâmetro. Passa exatamente sobre todos os 7 pontos. Minimiza a curvatura total, garantindo máxima suavidade matemática. A condição natural nos extremos permite curvatura zero em P e M. Resolve o problema de ordenação espacial usando o parâmetro t baseado em distância acumulada.

Decisão: O método escolhido foi a spline cúbica paramétrica por atender simultaneamente aos dois requisitos: passagem exata sobre todos os pontos de construção e máxima suavidade da curva.

5.1.8. Resumo do Aprendizado

1. **Proporções:** O método Sophia Jobim usa divisões proporcionais baseadas no busto, não em tabelas prontas. Isso significa que o molde se adapta automaticamente a diferentes tamanhos.
2. **Assimetria frente/costas:** A frente é sempre mais larga que as costas (deslocamento EF de 3 cm). Isso acomoda o busto e a mobilidade aos braços.
3. **Cava anatômica:** Construída com 7 pontos (P, Z, U, Q, T, Y, M) que controlam a curvatura. As bissetrizes em R (1.5 cm) e S (2.5 cm) são valores empíricos que funcionam para a maioria dos corpos.
4. **Decote com desvio:** Tanto o decote frente (ponto I2) quanto o decote costas (ponto L2) tem um desvio de 1 cm sobre a linha do ombro. Isso evita que o decote fique pontudo.
5. **Ombro costas com pence:** O ponto O desce 5 cm de K, e a linha LO é prolongada 1 cm para P. Essa pequena pence ajuda a acomodar a escápula.
6. **Barra elevada:** A barra sobe 3 cm a partir de H e C (pontos W e a). Isso evita que a blusa fique comprida demais nas laterais.