

DIAGRAMS


Action-Prefix System – Diagrams

Field	Value
Revision	2016 07 02 00 00 00
Created	- -
Last modified	- - T : : Z 10 4 140
Status	active
Scope	Mermaid diagrams for the \$. . action-prefix system
Audience	maintainers + engineers (companion to USER_GUIDE.md + MANUAL.md)
Inputs	docs/research/action_prefix_system/ {DESIGN.md, GRAMMAR_ADDENDUM.md, IMPLEMENTATION_REPORT.md}

Anti-bluff (`$ ... . .`): the diagrams depict only the design + the verified implementation. All five forms – including the `DEFAULT::` namespace forms `/` and the arrow form `( ---> )` – are implemented and verified (grammar suite `/`, paired-mutation meta-test `/`); none remain spec-only.


. Expansion flow (prompt → prefix match → registry lookup → expand → execute)

How a single prompt is processed: detect the prefix on the first non-blank line, handle the escape, look the token up in the registry, replace the prefix with the expansion, then execute the residual task. This is the C-preprocessor expand-then-rescan model applied to prompts (DESIGN.md §).

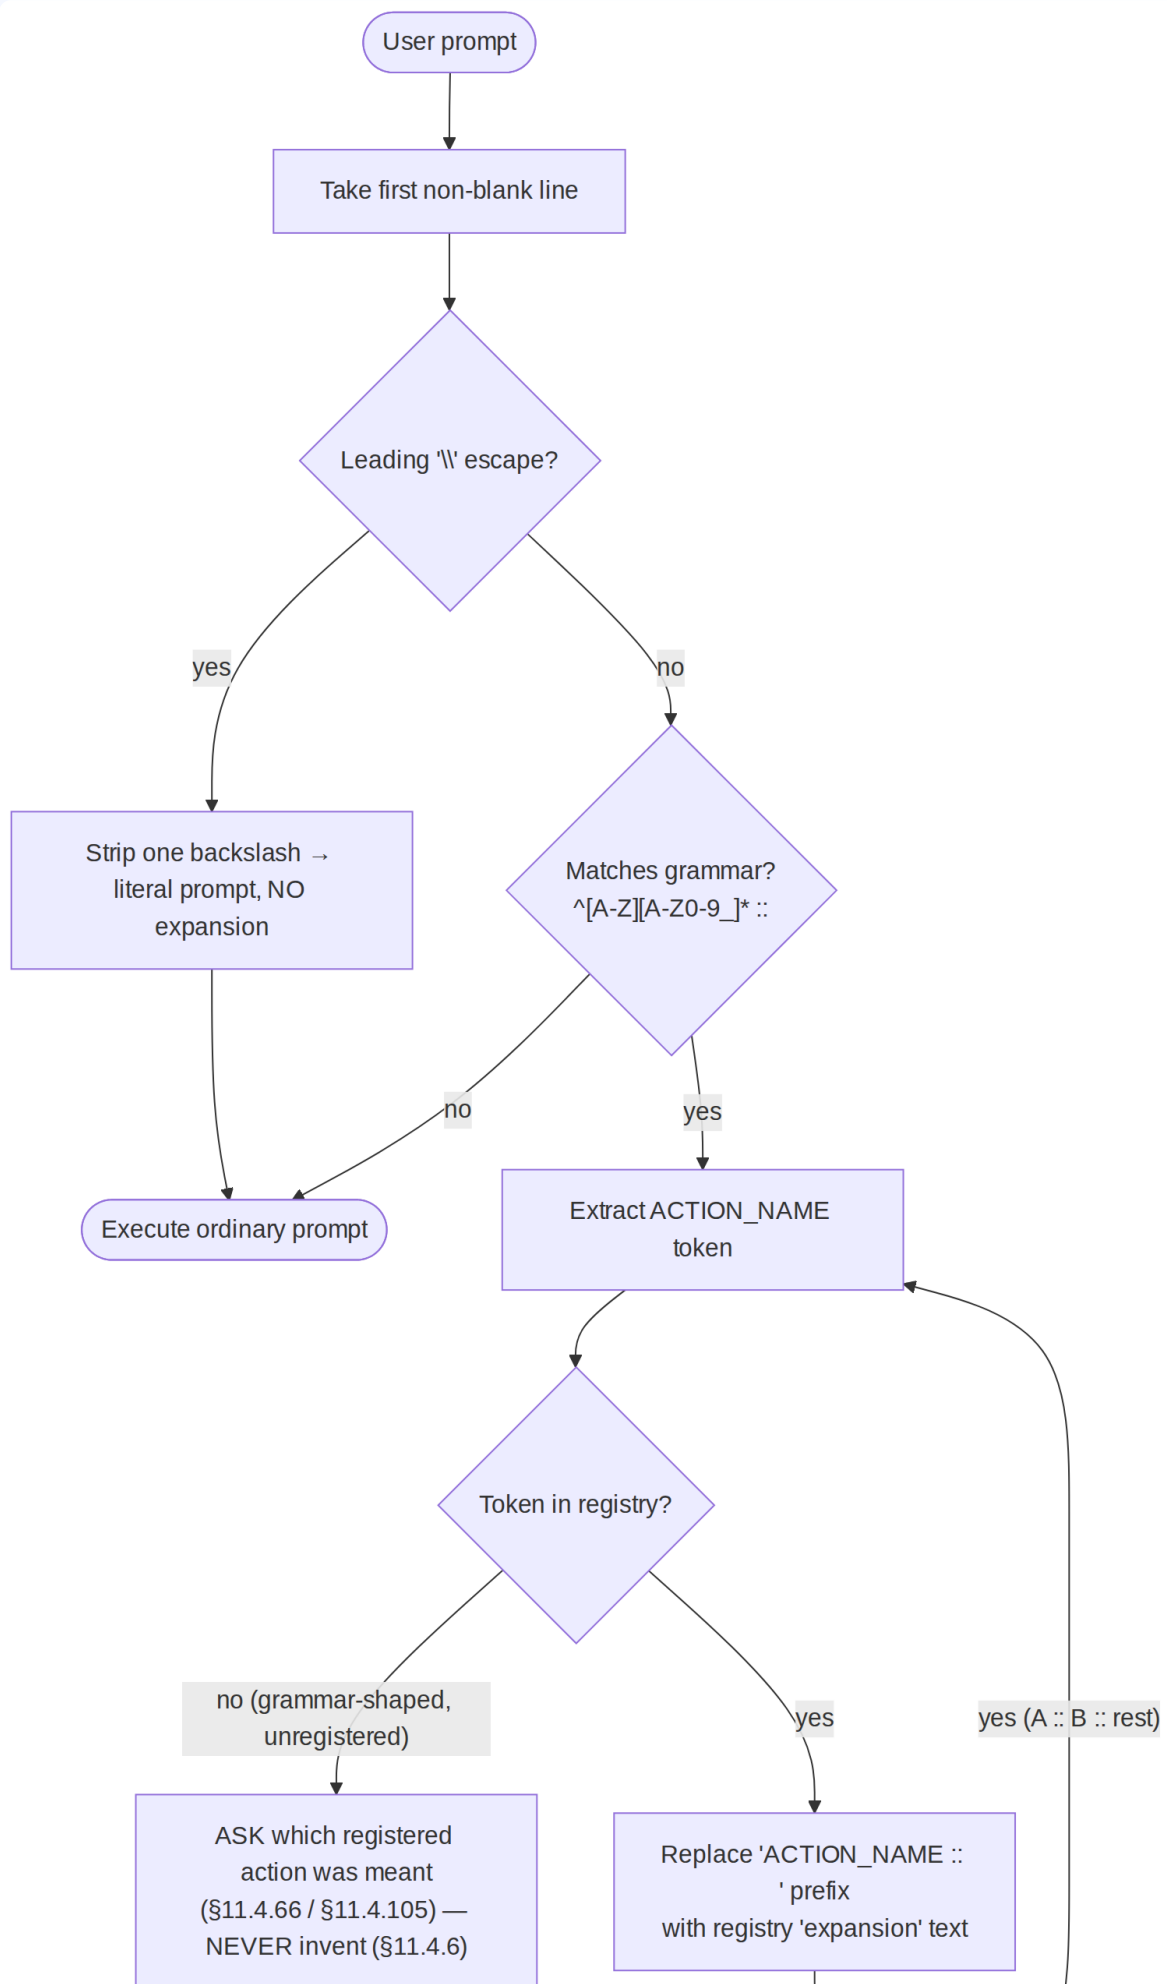

. Two-layer architecture across CLI agents

One shared registry feeds both layers. LAYER 1 (the recognition instruction in every context carrier) is the universal floor; LAYER 2 is the mechanical upgrade where an agent exposes a pre-submit seam. Only Claude Code has transparent mechanical free-form interception (the honest \$. . . boundary).

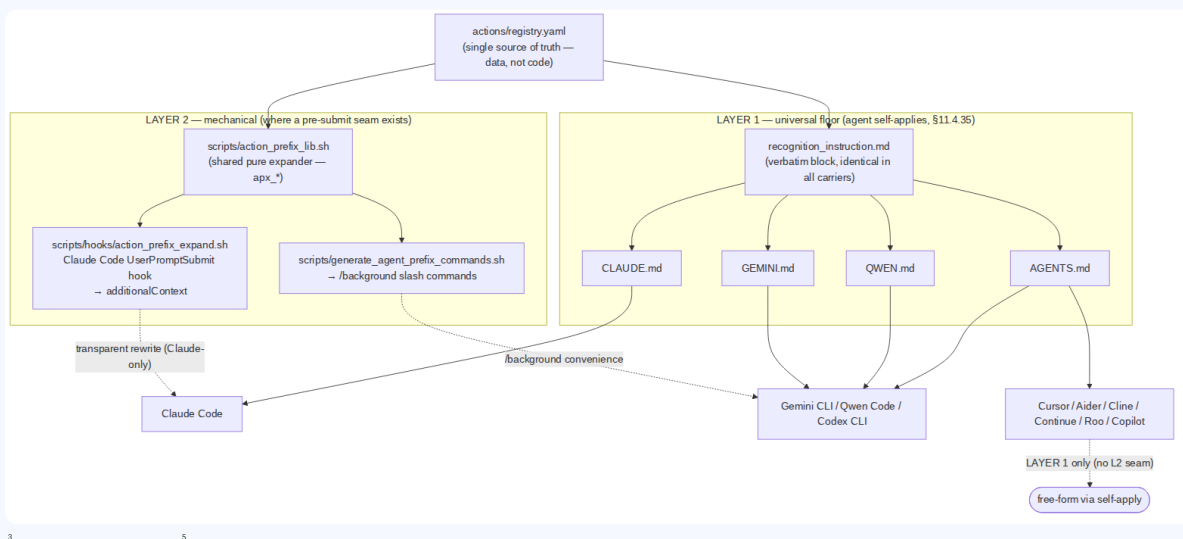


3

5

. The —form grammar decision tree

Which form of the first non-blank line was used. All five forms are **implemented** and verified (grammar suite / , paired-mutation meta-test /) per the GRAMMAR_ADDENDUM; forms and (the `DEFAULT::` namespace) and form (the arrow `--->`) are no longer spec-only. All five resolve to the same action + expansion by design.

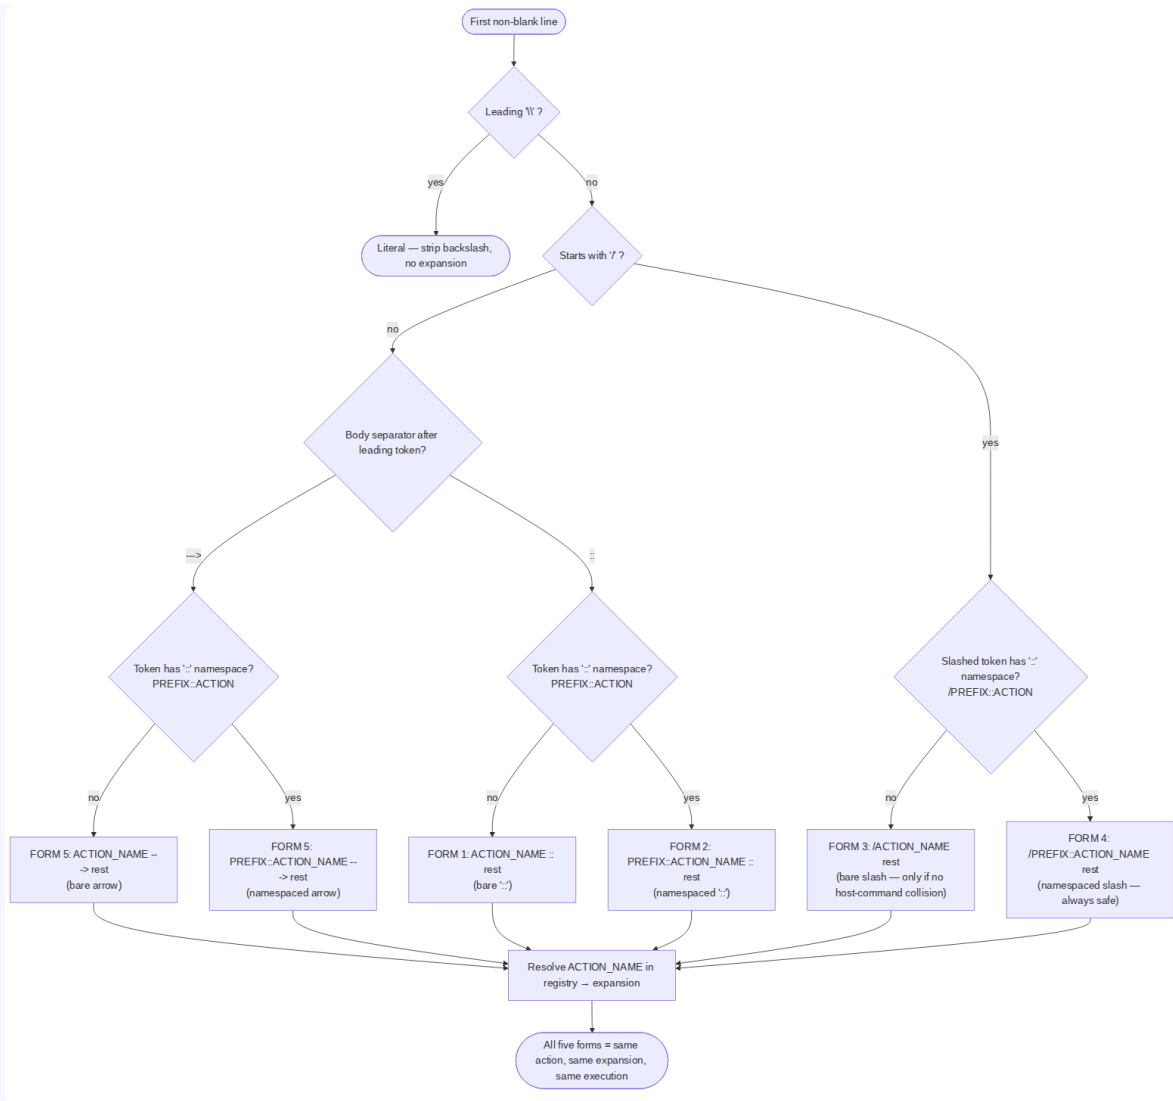

Legend: all nodes/edges = implemented + verified (forms , , , , ; grammar suite / , paired-mutation meta-test /). The `DEFAULT::` namespace registry keys (`default_namespace` / `namespace_separator` / `slash_prefix` / `namespaces` / `slash_bare`) plus the arrow keys (`arrow_form_regex` / `arrow_body_separator`) are present and `apx_parse_prefix` returns `matched_form ∈ {colon, slash, arrow}` for all five forms. A mid-line `--->` after a `::` token parses as the colon form (the arrow branch falls through). See `MANUAL.md § . / § .`

. Add-a-new-action sequence

Adding an action is a one-row registry edit plus a generator re-run – no code change in either layer. (DESIGN.md § / MANUAL.md § .)

NOTE – diagram could not be auto-rendered to an **image**. The data is shown below as a table for readability. (Source-level mermaid render failed; see the source .md for the original diagram definition.)

```
actor Dev as Maintainer
participant Reg as actions/registry.yaml
participant Gen as generate_agent_prefix_commands.sh
participant Out as actions/generated/*
participant Lib as action_prefix_lib.sh
participant Test as unit test + §1.1 mutation
participant Doc as docs (§11.4.44 / §11.4.65)

Dev->>Reg: add one actions[] row\n(name, version, summary≥6 words
§11.4.91, expansion, rules?, composes_with?)
Dev->>Gen: bash scripts/generate_agent_prefix_commands.sh
Gen->>Lib: apx_validate_registry + apx_lookup_expansion(NEWACTION)
Lib-->>Gen: expansion (verbatim)
Gen->>Out: write gemini/newaction.toml, qwen/newaction.toml, codex/
newaction.md\n(/newaction = form 3)

Note over Reg,Out: No edit to the hook OR the library – registry is
data, not code.\nLAYER 1 already knows to consult the registry.

Dev->>Test: add unit test (parses + grammar match + expansion correct)
\n+ paired mutation (corrupt expansion → gate FAILs)
Dev->>Doc: bump revision header; export .html/.pdf at commit time
(conductor)

Note over Dev: Optional – inline the expansion in the LAYER-1
block\nONLY if it must work without registry-file access (like
BACKGROUND).
```

. Related documents

- [USER_GUIDE.md](#) – end-user guide.
- [MANUAL.md](#) – developer/maintainer manual.
- `docs/research/action_prefix_system/{RESEARCH.md, DESIGN.md, GRAMMAR_ADDENDUM.md, IMPLEMENTATION_REPORT.md, RULE_DRAFT.md}` – source design.
- Canonical authority: `Constitution.md` § . . .