

SOL- — Status Custody at the Database Layer

Field	Value
Revision	1
Last modified	2026-07-22T20:40:00Z
Rank	1 (highest measured leverage)
Closes	PC-1 (status-without-custody), PC-9 (partial — evidence pre-conditions per state), the M6 operator-reopen recording bias
Seams	status-write (Seam A, in-database triggers) + build (Seam B, full-table sweep)
POC	<code>poc/sol01_status_custody/</code> — GREEN 10/10, RED-first transcript in <code>evidence/RED.txt</code> → <code>evidence/GREEN.txt</code>
Anchors mechanized (no new anchor)	§11.4.146(D3), §11.4.115(F), §11.4.34, §11.4.205

. The measured problem this closes


Measurement	Value	Source
Terminal-status items with ZERO history rows	52 / 108 (48%)	[M2]
Currently-Reopened items with no Reopened event	13 / 26	[M4]
Worst item R1: reopen events / terminal events	4 / 0 — an impossible sequence proving ledger bypass	[M5]
Reopen-event attribution	25/25 = "AI", 0 = "User" — while the six operator-driven reopens (the highest-severity escapes in the record) left NO events at all	[M6]
Raw-SQL bypass of the sanctioned mutation tool	proven by 3 independent forensic fingerprints	PC-1
Custody seam designed 2026-07-17, status 2026-07-22	still prose — sweep absent, gate absent from both canonical gate sites, ratchet file absent (needed)	[M11]
Corpus 3 (best-disciplined corpus): terminal statuses without terminal history events	~88% — and its one real reopen got no Reopened event either	corpus 3 §2.1, §2.3

The class (ROOT_CAUSE PC-1): *any SSoT writable outside its audited mutation path will, under deadline pressure, be written outside its audited mutation path.*

Corpus 3 proves the failure is not a discipline problem — the **best**-disciplined corpus in the record still has an 88% history-gap, because the event-writing seam was advisory there too (§11.4.205 test fails in both corpora).

. The mechanism

Move the seam INTO the database file. Three cooperating layers:

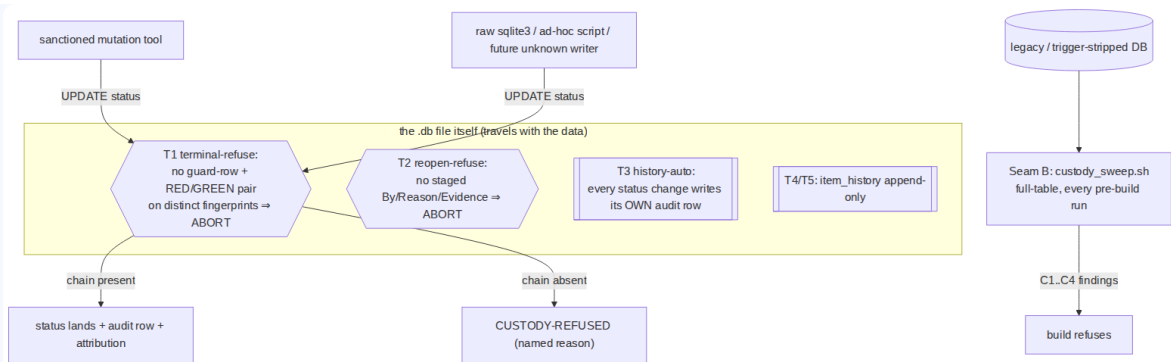

1. **Seam A — refusal triggers in the DB file** (`custody_triggers.sql`). A terminal status (Fixed / Implemented / Completed) is *unwritable* unless the custody chain exists AS ROWS: registry row keyed by the exact item id → RED verdict (`exit≠0`) → GREEN verdict (`exit=0`) on a **different** artifact fingerprint (identical fingerprints = fix never deployed, §11.4.115(F)). A Reopened flip is unwritable without a staged attribution row (By ∈ {AI, User} + Reason + Evidence, §11.4.34).
2. **The historian is the database, not the writer** (trigger T3). Every status change writes its own `item_history` row as a side effect of the UPDATE itself. "Status moved with zero history rows" becomes *impossible by construction* on a triggered DB — including for raw `sqlite3` writers, ad-hoc scripts, and writers that do not exist yet. T4/T5 make the ledger append-only.
3. **Seam B — full-table sweep at every build** (`custody_sweep.sh`). Catches what triggers cannot: legacy DBs predating the triggers, or DBs whose triggers were dropped (dropping a trigger IS possible for a determined writer — see §5). Four checks, each mapped to a measured class: C1 = the M2 zero-history class, C2 = the M4 no-reopen-event class, C3 = the M5 impossible-sequence class, C4 = the M7 unguarded-done class. The sweep control-needles itself (an empty/unreadable items table exits 2 `SWEEP-BLIND` , never PASS — §11.4.201(7)(b)).

Why the database layer and not the tool layer: PC-1's forensics proved the sanctioned tool was already structurally incapable of the custody-free write — *and the write happened anyway*, because the tool is optional and raw SQL is not. A trigger binds every connection to the file. This is the §11.4.205 "if I documented this and nobody implemented the hook, would anything catch it?" test answered at the strongest available layer: the enforcement travels **with the data**, through clones, copies, and CoW tracks.

The M operator-channel fix specifically

The highest-value detection channel (operator reopens — 6/6 of the worst escapes) was the least recorded (0 events). Under SOL-01 that inverts: the operator (or the agent acting on the operator's report) stages one row —

```
INSERT INTO reopen_intake(atm_id, by_actor, reason, evidence_path)
VALUES('ATM-XXX', 'User', 'manual-testing-detected', 'qa/operator_note.md');
UPDATE items SET status='Reopened' WHERE atm_id='ATM-XXX';
```

— and the flip both *requires* and *consumes* the attribution. No staged row $\Rightarrow$ the flip itself fails loudly at the point of work, which is the only moment the attribution is still knowable.

. POC results (all in poc/sol01_status_custody/)

RED first (§11.4.224): evidence/RED.txt — test run before any implementation existed, exit 1, 3 missing artifacts. Then implementation; evidence/GREEN.txt — **10/10 PASS, exit 0:**

Case	Kind	Result
A1–A3	golden-good: full chain → write succeeds, history auto-row, sweep PASS	PASS
B1	golden-bad: raw un-evidenced terminal UPDATE → CUSTODY-REFUSED	PASS
C1	golden-bad: legacy DB, terminal item, zero history → sweep FAILs naming the item	PASS
D1	negative-control: ordinary open item → sweep does NOT flag (§11.4.201(1) guard)	PASS
E1/E2	reopen path: un-staged flip refused; staged User flip recorded by_actor=User	PASS
F1	append-only ledger: history UPDATE refused	PASS
⁴ G1	golden-bad: identical RED/GREEN fingerprints → terminal refused (§11.4.115(F))	PASS

. The failure this makes IMPOSSIBLE

On a triggered database:

- A terminal status with no history row **cannot exist** (T3 writes it in the same statement).
- A terminal status without a registered guard + distinct-fingerprint RED/GREEN pair **cannot be written** — by any writer, sanctioned or not (T1).
- A reopen without By/Reason/Evidence attribution **cannot be written** (T2) — the M6 bias channel (operator reopens leaving no trail) is closed at the only seam it crosses.
- The audit ledger **cannot be edited or pruned** (T4/T5).
- A legacy or trigger-stripped DB **cannot pass the build** while holding any of the four measured violation classes (Seam B sweep, wired at pre-build).

Had this existed during the measured window: all 52 zero-history terminal items [M2], the R1 4/0 impossible sequence [M5], and the 25/25-"AI" attribution bias [M6] are refused at write time; the 6/6-broken operator sample [ROOT_CAUSE §1] becomes structurally impossible to *reach* because the items could never have carried terminal statuses without verdict pairs.

. What it still does NOT catch (honest boundary, § . .)

1. **Fabricated evidence rows.** A writer can INSERT fake verdict rows (a RED that never ran) and then close the item. The triggers verify chain *shape*, not chain *truth* — truth is SOL-04's job (evidence-class matching) + SOL-02's (verdicts keyed to real artifact fingerprints consumed at release) + the §1.1 mutation discipline (a guard never observed failing mints nothing). Layered, not duplicated.
2. **DROP TRIGGER .** SQLite has no in-file privilege separation; a determined writer can drop the triggers. That act is (a) loud in `git diff` of the tracked DB (§11.4.95 — the DB is tracked), (b) caught by Seam B, whose first check on a supposedly-triggered DB can assert trigger presence (`SELECT count(*) FROM sqlite_master WHERE type='trigger'` — a consumer integration should add this; the POC sweep catches the *consequences* instead). Defense in depth, not a wall.
3. **Semantic quality of the closure.** The chain proves custody, not that the guard's oracle is calibrated (§11.4.107(10) goldens remain necessary-not-sufficient — §11.4.146(D3) honest boundary carried forward verbatim).
4. **The obsolete path** — different evidence shape (obsolete-details), out of POC scope, stated here; the same trigger pattern extends to it mechanically.
5. **WAL/concurrency behaviour under many writers** was not stress-tested in this POC (UNPROVEN: trigger throughput under 10 concurrent writers; the §11.4.85 stress suite is owed at integration time).

. Integration path (separate tracked work item – this POC carries no force per § . .)

1. Apply the trigger pack to the consuming project's tracked DB **in the same commit** as wiring `custody_sweep.sh` into the pre-build suite (the §11.4.205 construction order: the executable sweep + its golden-bad fixture land WITH the governance text citing them).
2. Adoption of the legacy backlog (52 zero-history items already terminal) is an OPERATOR decision per §11.4.66 — options: retro-annotate with `UNATTRIBUTED-LEGACY` history rows, or a one-time §11.4.135-style monotone ratchet on C1 findings. Never an invented ratchet.
3. Map real vocabulary (the `(→ Fixed.md)` suffixed literals) and the real verdict store paths as consumer DATA (§11.4.35).