

Reactive Recursive Submodule Auto-Sync – Risk Research + Design + Phased Plan

Revision: 1 **Last modified:** 2026-07-14T00:00:00Z **Status:** DESIGN DOCUMENT ONLY — research + design + phased plan. **NONE of this is implemented.** No engine code exists for this mechanism; every behavioural component below is PLANNED. This document does not claim any working behaviour (§11.4.6 no-guessing). **Authority:** Operator design directive (2026-07-14) — extend the Docs Chain engine (§11.4.106) with a rock-solid, risk-free, recursive reactive submodule auto-sync capability. **Classification (§11.4.17):** universal (the mechanism references no project-specific hardware; it operates on any git-submodule tree). The ATMOSphere-specific submodule roster, `/mnt/trackN` layout, and owned-org set are consumer-side data per §11.4.35. **Design provenance:** Docs Chain engine docs (`docs_chain/docs/ARCHITECTURE.md` , `CONFIG_SCHEMA.md` , `CONSTITUTION_INTEGRATION.md`); constitution anchors §11.4.113, §9.2, §11.4.84, §11.4.180, §11.4.26, §11.4.188, §11.4.86, §11.4.69, §11.4.107, §2.1, §11.4.28, §11.4.31, §11.4.176–§11.4.182; authoritative git-scm.com sources (see Sources footer).

0

. Executive summary

The project uses git submodules deeply: the main repo `.gitmodules` declares ~30 submodules (10 owned players + HelixQA dependency chain + hardware libs); the constitution submodule carries its own nested `.gitmodules` (`token_optimizer` + `session_orchestrator`); and the multi-track layout (§11.4.178/§11.4.179) means the SAME submodule can be checked out in many places across `/mnt/track1..4` . Keeping this graph consistent by hand is error-prone: the #1 git submodule footgun is the **detached-HEAD default** — `git`

`submodule update` leaves a submodule with no working branch, and "even if you commit changes to the submodule, those changes will quite possibly be lost the next time you run `git submodule update`" (git-scm.com/book, Source [S1]).

The operator's three rules are:

- **(a)** a submodule tracking `main / master` → regular fetch+pull, then FULLY-RECURSIVE commit+push to ALL upstreams (§2.1), with a clean `git status` invariant on every submodule;
- **(b)** a submodule an operator has DELIBERATELY checked out to a non-main branch → **PIN** that HEAD; NEVER auto-update it;
- **(c)** a change committed+pushed on ANY submodule anywhere → auto-update ALL OTHER copies of that same submodule out-of-box, then commit+push the parent-pointer(s) recursively to all upstreams.

The **core design decision** is to model this as a new set of **node kinds + a git-adapter transform family inside the Docs Chain DAG** (§11.4.106), NOT as a new standalone script. Docs Chain already gives us the exact primitives this needs: content-hash change detection (not mtime, §11.4.86), a Kahn-topological DAG with cycle rejection, declared-authority bidirectional `sync` edges with a "both-dirty ⇒ conflict, no writes" rule (§11.4.6), atomic staging + rename + rollback (§8 / §9.2), `verify` as a read-only deterministic gate (§11.4.50), and per-run captured evidence (§11.4.69). We add: a **`git_submodule` node kind** whose "content hash" is the recorded gitlink SHA + branch-tracking state; a **per-submodule state machine** (`branch-tracking` vs `pinned` vs `dirty` vs `conflict`); a **fan-out propagation index keyed by submodule remote URL** so all duplicate copies converge; a strict **child-before-parent-pointer ordering** guarantee (mirroring `git push --recurse-submodules=on-demand`, Source [S1]); a **re-entrancy guard** (a run-scoped `.docs_chain/SYNC_IN_PROGRESS` flag + git-lock reaping per §11.4.180) so a sync that commits cannot re-trigger itself into an infinite loop; and an **anti-bluff surface** where every sync run captures a `git_sync_evidence.json` and ships a golden-good/golden-bad self-validated analyzer (§11.4.107(10)).

Top risks (full list in Part B1): detached-HEAD commit loss (R1); auto-updating a deliberately-PINNED branch and destroying operator work (R2 — the rule (b) violation); force-push data loss (R3 — STRICTLY FORBIDDEN §11.4.113); fan-out inconsistency across duplicate copies (R7); concurrent-track races on one shared object store (R8/R9); child-parent pointer ordering inversion (R11 — a dangling

gitlink); hook re-entrancy infinite loop (R12); `.gitmodules` graph cycles / unbounded recursion (R13); and stale `index.lock` / `HEAD.lock` freezing every worktree at once (R16).

Plan: 8 ordered phases (Phase 0 spec → Phase 7 ATMOSphere wiring), each with its scope, touched files, pre-build gate + paired §1.1 mutation + on-host test, and acceptance criteria. Everything below is a PLAN; nothing is built this run.

1

PART B — In-depth risk research

Each risk states the **failure mode** (what breaks for the operator), the **git-level cause** (the precise mechanism), and the **mitigation** the design (Part B2) must implement. Sources are cited as [S1] git-scm Book — Submodules, [S2] git-scm — git-worktree(1), [S3] git-scm — git-submodule(1); full URLs in the Sources footer. Facts not verified against a fetched source this session are marked **UNCONFIRMED** per §11.4.6 (never guessed).

R — Detached-HEAD commit loss

- **Failure mode:** the auto-sync commits inside a submodule that is in detached-HEAD state; a later `git submodule update` re-checks-out the superproject-recorded SHA and the just-made commit becomes unreachable (only recoverable via reflog, garbage-collected after `gc.reflogExpireUnreachable`).
- **Git-level cause:** [S1] — *"Git would ... leave the sub-repository in what's called a 'detached HEAD' state ... even if you commit changes to the submodule, those changes will quite possibly be lost the next time you run git submodule update."* The superproject stores a specific commit SHA (mode `160000`), not a branch, so nothing keeps the new commit reachable.
- **Mitigation:** the mechanism NEVER commits into a detached HEAD. Before any commit in a submodule under rule (a), it MUST first ensure the submodule is ON its tracking branch (`git symbolic-ref -q HEAD` resolves to `refs/heads/<branch>`); if detached, it checks out the tracking branch first

(fast-forwarding the branch to the current detached SHA only if that is a strict² ancestor, else it is a conflict → stop, no writes). The per-submodule state machine (Part B2 §4) makes `detached` an explicit, non-committable state.

R — Auto-updating a deliberately-PINNED non-main branch (the rule (b) violation)

- **Failure mode:** an operator has checked a submodule out to `feature/mistiq-vader` to do work; the auto-sync "helpfully" fetches+resets it to `main`, destroying the operator's in-progress branch state / uncommitted work.
- **Git-level cause:** `git submodule update --remote` with `submodule.<name>.update` other than `none` will move HEAD; a naïve "always pull main" loop ignores which branch is checked out ([S3] update modes).
- **Mitigation:** the per-submodule state machine has a `pinned` state. A submodule whose current branch $\neq$ its configured tracking branch (`submodule.<name>.branch` , default `main`) AND whose checkout was operator-initiated is `pinned` : rule (a) auto-update is SKIPPED entirely; only rule (c) parent-pointer bookkeeping and rule-(a)-cadence-merge-INTO-the-pinned branch (§11.4.188, background, ff-only, conflict-stops) apply, never a reset onto main. Pin detection is recorded explicitly in `.docs_chain/3 submodule_pins.json` (see §4.3) so "deliberate" is a fact, never a guess (§11.4.6).

R — Force-push data loss (STRICTLY FORBIDDEN)

- **Failure mode:** to "resolve" a divergence between a submodule's local branch and its remote (or between two mirrors), a naïve implementation force-pushes and silently deletes commits another track/session pushed.
- **Git-level cause:** `git push --force` / `--force-with-lease` / `++<ref>` rewrites the remote ref, discarding commits not in the local history.
- **Mitigation:** §11.4.113 ABSOLUTE — force-push is STRICTLY FORBIDDEN with NO exception (no operator-approval path). The mechanism uses the §11.4.113 6-step integration procedure: fetch all remotes → set base to latest `main / master` tip → MERGE local changes onto it (union, no `-s ours` , no reset, no rebase of a shared branch) → resolve conflicts with zero markers →

commit the merge → ff-only push to ALL upstreams. Because the merge commit descends from every mirror tip, every push is a fast-forward and force is never necessary. A §11.4.109-class PreToolUse guard blocks `push --force / --force-with-lease / push +<ref>` at the tool-call boundary.

R — Branch divergence between mirrors (multi-upstream § .)

- **Failure mode:** owned repos have multiple upstreams (github, origin, upstream, vasicdigital); mirror A advanced by track-1, mirror B by track-2; a push to B rejects (non-fast-forward) and the sync stalls or (worse) forces.
- **Git-level cause:** §2.1 multi-upstream push is the norm; independent pushes to different mirrors create divergent tips.
- **Mitigation:** before every push, `git fetch --all --prune --tags` (§11.4.37/§11.4.71 — the most-advanced mirror tip is the base); merge every non-empty `HEAD..<mirror>/<branch>` range locally (R3 procedure); then a single ff-only fan-out push to every upstream lands on all. If a mirror advanced again mid-run, re-fetch that mirror, re-merge, re-validate, re-push (bounded retry, then park per §11.4.101). Captured per-mirror push evidence goes in `git_sync_evidence.json`.

R — The on- main auto-update rule vs the PINNED-branch rule interaction

- **Failure mode:** ambiguity — a submodule is on `main` in track-1 but `pinned` to a feature branch in track-2 (same URL, different checkouts). A single global "this submodule is on-main" verdict is wrong for one of the two copies.
- **Git-level cause:** the branch-checkout state is per-worktree/per-copy (a property of each physical checkout), not a property of the submodule URL.
- **Mitigation:** the branch-tracking-vs-pinned state machine is **per physical copy**, keyed by `(copy_path)`, NOT by URL. The fan-out index (§5) is keyed by URL for *content* convergence (which SHA), but the *update policy* (auto-update vs pin) is decided per copy from that copy's own HEAD state. A URL can therefore have some copies auto-updating on main and others pinned; each is handled by its own state.

R – The clean- git status invariant vs unrelated local edits

- **Failure mode:** the auto-sync runs `git add -A && commit` in a submodule that also holds an operator's unrelated uncommitted edit, sweeping the edit into the sync commit (the §11.4.84 mutation-residue class, and a §11.4.30 `git add -A` footgun).
- **Git-level cause:** `git add -A` stages everything; an in-flight edit or a paired-mutation marker (`// always pass` , `MUTATED for paired`) gets committed.
- **Mitigation:** §11.4.84 working-tree quiescence is a PRECONDITION for any sync in a copy. The mechanism (i) `git status --porcelain` the submodule; (ii) if there is ANY unaccounted modified/untracked entry beyond the mechanism's own declared scope → ABORT that copy (exit non-zero, no writes), surface it (§11.4.66); (iii) it NEVER uses `git add -A` — it stages only the specific gitlink / declared paths; (iv) it greps for mutation markers before any stage (§11.4.84). A dirty submodule is a `dirty` state in the state machine — non-committable.

R – Fan-out inconsistency across duplicate copies of the same submodule

- **Failure mode:** submodule X (URL U) exists at `/mnt/track1/atmosphere/tools/helixqa/...` AND `/mnt/track2/atmosphere/tools/helixqa/...` (and possibly nested inside another submodule). A change lands+pushes on one copy; the other copies keep stale gitlinks → builds diverge, the operator's "all copies must auto-update together" rule is violated.
- **Git-level cause:** each superproject records its OWN gitlink SHA independently; git has no built-in "propagate to sibling checkouts of the same URL" operation.
- **Mitigation:** a **URL-keyed fan-out index** (§5). After a child change is pushed to all mirrors, the mechanism enumerates every OTHER copy of URL U in the registry, `git fetch` es each, updates it (per that copy's own state — auto-update if branch-tracking, or record a parent-pointer bump if pinned), and records the new gitlink in each hosting superproject. Convergence is verified by a fan-out invariant: after a run, every branch-tracking copy of U resolves HEAD

to the same pushed SHA (captured in evidence). Copies that are `pinned` are reported (not force-converged) so the operator sees the divergence is intentional.

R — Concurrent writers / races between parallel tracks

- **Failure mode:** track-1 and track-2 both run the sync simultaneously against overlapping submodule URLs; interleaved fetch/merge/push corrupt each other's staged state or produce a lost update.
- **Git-level cause:** §11.4.176/§11.4.178 — parallel tracks; a shared object store (if worktrees) or independent clones both pushing to the same mirror.
- **Mitigation:** an advisory **exactly-once claim registry keyed by submodule URL** (§11.4.176 A) — a track claims URL U for the duration of its sync via a lockfile (`.docs_chain/locks/submodule/<url-hash>.lock` , holder PID recorded); another track targeting U serialises (non-blocking try-lock; if held-and-live, skip+requeue). Per §11.4.179, tracks SHOULD be own- `.git` isolated clones so a stale lock in one cannot freeze the others. Cross- track push conflicts collapse to the R4 fetch-merge-ff-push path. See also R16 (lock death).

R — Worktree shared-object-store hazard (multi-checkout of a superproject)

- **Failure mode:** if the multi-track layout uses `git worktree` (one common `.git`) rather than independent clones, a submodule operation in one worktree corrupts or confuses the submodule state of another, and a stale shared lock freezes all worktrees at once.
- **Git-level cause:** [S2] — *"Multiple checkout in general is still experimental, and the support for submodules is incomplete. It is NOT recommended to make multiple checkouts of a superproject."* All `refs/heads/*` and the object store are shared via `$GIT_COMMON_DIR` ; a branch can be checked out in only one worktree; `HEAD` / `index` are per-worktree but refs are shared.
- **Mitigation:** the design REQUIRES the §11.4.179 own- `.git` isolated-clone (CoW/reflink) layout for parallel tracks and REFUSES to operate on a submodule reached through a shared- `common-dir` worktree superproject (detected via `git rev-parse --git-common-dir` resolving outside the copy's

own tree → hard error, "run under §11.4.179 isolated clones"). This turns a git-documented "not recommended / incomplete" hazard into an explicit refusal, not a silent risk. UNCONFIRMED: whether the current `/mnt/trackN` layout is¹⁰ worktree-shared or isolated-clone on THIS host — the mechanism detects it at runtime rather than assuming (§11.4.6).

R — Partial / network-interrupted fetch or push

- **Failure mode:** a fetch/push is interrupted (network drop, SIGKILL) mid-transfer, leaving the submodule with a partially-updated ref/objects or a mirror pushed while a sibling mirror is not (breaking §2.1 all-mirrors consistency).
- **Git-level cause:** `git fetch` / `git push` are not transactional across multiple refspecs/ remotes; a crash between mirror-A-push and mirror-B-push leaves them divergent.
- **Mitigation:** (i) fetch is idempotent — a re-run simply re-fetches; the mechanism never commits on the basis of a partial fetch (it re-verifies the tip after fetch). (ii) Push fan-out records per-mirror success in `git_sync_evidence.json` ; a crash leaves some mirrors behind, and the NEXT run's R4 fetch-merge-ff-push brings the laggards forward (ff-only, no loss). (iii) The parent-pointer commit is deferred until the child push to ALL mirrors is confirmed (R11 ordering) — a partial child push means the parent pointer is NOT yet advanced, so no¹¹ dangling gitlink is published. Composes with §11.4.88 detached background push + per-mirror flock.

R — Parent-pointer commit ordering (child-before-parent)

- **Failure mode:** the superproject records+pushes a new gitlink SHA before the submodule commit is pushed to the submodule's own remote → a clone of the superproject cannot resolve the gitlink (`fatal: reference is not a tree`), because the referenced submodule commit does not exist on any submodule mirror.

- **Git-level cause:** [S1] — *"you have to push the submodule changes before the superproject changes."* `git push --recurse-submodules=check` fails if a submodule contains changes not on any remote; `=on-demand` pushes submodules first.
- **Mitigation:** the fan-out algorithm has a strict topological ordering: for each affected hosting superproject, the child submodule commit MUST be pushed to ALL its mirrors and confirmed (evidence recorded) BEFORE the parent stages/commits/pushes the new gitlink. The mechanism additionally runs `git push --recurse-submodules=check` (or the equivalent reachability probe) as a belt-and-suspenders gate — a superproject push that would leave a gitlink unresolvable is refused. Recursion applies at every nesting level (grandchild before child before parent).

R — Hook re-entrancy / infinite loop (sync→commit→hook→sync...)

- **Failure mode:** the sync is triggered by a git hook (post-commit / post-merge / a watch daemon on `.git`); its own commit fires the hook again, which re-triggers the sync — an infinite loop that pins a CPU and can spew commits.
- **Git-level cause:** git hooks fire on the very events the sync produces; an fsnotify watch on the repo sees the sync's own writes.
- **Mitigation:** a run-scoped **re-entrancy guard**: the mechanism writes `.docs_chain/SYNC_IN_PROGRESS` (holder PID + start epoch) at run start and removes it at run end (in a `trap ... EXIT`); any hook/watch trigger that sees a live guard is a NO-OP. Docs Chain early-cutoff (§4 of ARCHITECTURE) is the second layer: after the sync's own commit, the node hash equals the just-written value, so the next pass sees "not dirty" and stops — no loop (the exact mechanism that already prevents `md↔db` oscillation). A per-run visited-set + max-iteration guard (ARCHITECTURE §6.1) is the third layer: fail loudly, never spin.

R — Nested-submodule recursion depth + .gitmodules graph cycles

- **Failure mode:** the constitution submodule has its own `.gitmodules` ; a naïve recursive walk either recurses unboundedly, or a (mis-configured) submodule graph containing a cycle (`A` includes `B` includes `A`) causes infinite recursion.
- **Git-level cause:** [S3] — `git submodule update --init --recursive` and `foreach --recursive` walk the `.gitmodules` graph; nothing intrinsically forbids a cycle in that graph, and §11.4.28(C) forbids nested own-org chains precisely because they are hazardous.
- **Mitigation:** (i) the recursive walk maintains a **visited-URL set**; re-encountering a URL aborts that branch with a "cycle in .gitmodules graph" error (exit config-error, like Docs Chain's Kahn cycle refusal, exit 4). (ii) A **max-depth guard** (configurable, default e.g. 8) bounds recursion. (iii) The design HONORS §11.4.28(C): owned-submodule nested chains are forbidden in general; the ONLY sanctioned nesting is the depth-1 constitution-submodule carve-out (`constitution/submodules/*`) — the walker treats depth-1 constitution nesting as expected and anything deeper in an owned repo as a §11.4.28(C) violation to REPORT, not silently traverse.

R — Submodule URL drift / renamed paths

- **Failure mode:** a submodule's URL in `.gitmodules` changed (org rename, SSH → HTTPS) but the local `.git/config` still points at the old URL; fetch/push hit the wrong (or dead) remote, or the fan-out index keys two physically-same submodules under two different URL strings and fails to converge them.
- **Git-level cause:** [S3] — `.gitmodules` (tracked) and `.git/config` (local) hold the URL independently; `git submodule sync [--recursive]` reconciles `.gitmodules` → `.git/config` but only for already-initialised submodules.
- **Mitigation:** the mechanism runs `git submodule sync --recursive` before any fetch so `.git/config` reflects `.gitmodules` . The fan-out index keys copies by a **canonicalised remote URL** (normalise `git@github.com:org/Repo.git` and `https://github.com/org/Repo.git` and trailing `.git` to one canonical form) so the same logical repo under two URL spellings

converges as one. A renamed path is detected (gitlink path no longer matches
1 5 `.gitmodules`) and REPORTED (operator decision, §11.4.66), never auto-guessed.

R — Uninitialised / absent submodules

- **Failure mode:** a submodule is declared in `.gitmodules` but not initialised in a given copy (`git submodule status prefix -`); the sync tries to fetch/commit inside an empty directory and errors or, worse, treats "no gitlink" as "delete the submodule".
- **Git-level cause:** [S3] — `git submodule status prefix -` = not initialised; the working tree has no `.git` for it.
- **Mitigation:** the mechanism classifies each declared submodule via `git submodule status` prefixes: `-` (uninitialised) → SKIP with reason (`hardware_not_present` -analogue, §11.4.69 skip vocabulary), never a delete; `+` (checked-out SHA ≠ index SHA) → the `dirty / drift` state; `U` (merge conflict) → the `conflict` state (stop, no writes, operator resolves); (clean) 1 6 → normal. No auto-init unless the copy's context declares `auto_init: true` .

R — The git-lock family on holder death (index.lock / HEAD.lock / refs/ / .lock)

- **Failure mode:** a sync process (or a concurrent `commit_all.sh / push_all.sh`) dies holding `.git/index.lock / .git/HEAD.lock / .git/refs/**/* .lock` ; every subsequent git op in that repo (and, under a shared worktree common-dir, every worktree, R9) freezes with "*Another git process seems to be running*" — the exact 9-hour all-track freeze forensic anchor of §11.4.180.
- **Git-level cause:** git takes an existence-based lock file for index/ref updates and removes it on completion; a crashed holder leaves the file behind (git does NOT auto-release on death).
- **Mitigation:** §11.4.180 stale-lock auto-reap — BEFORE acquiring, the mechanism reaps a PROVABLY-stale lock: recorded-holder PID DEAD (`kill -0 <pid>` fails), OR (no PID) age > threshold AND no live git/ `commit_all.sh / push_all.sh` holding that repo. It reaps `.docs_chain/* .lock` plus the git-

internal `index.lock / HEAD.lock / refs/**/* .lock` . It NEVER removes a live-held lock (that corrupts a concurrent writer — §9.2). Each REAPED/KEPT decision

- ¹⁷
- reason is logged (`qa-results/.../lock_reap/<ts>.log`) as captured evidence (§11.4.6 — liveness PROVEN via `kill -0`).

R — Destructive-op data-safety (branch reset, gitlink rewrite, submodule de-init)

- **Failure mode:** a merge-onto-main or a fan-out reset loses commits; a submodule de-init drops local work; a bulk gitlink rewrite corrupts the tree.
- **Git-level cause:** any history rewrite / reset / de-init / bulk removal is destructive.
- **Mitigation:** §9.2 zero-risk data safety — BEFORE any destructive op the mechanism takes a hardlinked `.git` mirror backup (`cp -al .git <backup>/repo.git.mirror` , zero disk, <2 s), records metadata (refs/tags/submodule-pointers/HEAD/tree-hash), defines the expected post-op state, runs the op (never `--no-verify` , never auto-force), runs the post-op gate (HEAD tree identical where content should be preserved; all tags/pointers intact), restores immediately on any mismatch, and writes an audit trail. Merges are the ONLY sanctioned way to reconcile divergence (no reset/rebase of shared branches).

R — Constitution-submodule change workflow specificity (§ . .)

- **Failure mode:** the mechanism treats the constitution submodule like any other and skips the §11.4.26 pipeline (fetch+pull FIRST, careful conflict resolution, cascade, bump pointer, post- merge full validation) — landing a constitution change on one upstream but not others (a §2.1 + §11.4.26 violation) or leaving the consumer pointer stale.
- **Git-level cause:** the constitution submodule is a governance source-of-truth with a mandatory update pipeline distinct from ordinary code submodules.
- **Mitigation:** the constitution submodule is a FIRST-CLASS special case in the config (`constitution_workflow: true` on its node). For it the mechanism runs the full §11.4.26 ordered pipeline: fetch+pull- `--ff-only` FIRST → apply → validate (no conflict markers, cross-reference consistency) → commit+push to ALL upstreams → post-merge `git submodule update --remote --init +`

cascade verifier → bump the consumer `.gitmodules` pointer in the SAME
parent commit. Never `git add -A` inside the constitution submodule
(§11.4.30).

R — main→feature merge cadence drift (§ . .)

- **Failure mode:** a long-lived pinned feature-branch submodule (rule (b)) drifts far from `main` ; the eventual back-merge is a giant conflict storm and integration risk.
- **Git-level cause:** a feature branch that never integrates trunk diverges monotonically.
- **Mitigation:** §11.4.188 — for every live pinned feature-branch copy, the mechanism regularly (after every trunk tag / $\geq$ daily / before a significant new chunk) `git merge origin/main` INTO the pinned branch (NEVER rebase a shared branch; fetch-first; §9.2 backup before a large/ risky merge; conflicts stop with zero markers; post-merge smoke GREEN + conflict-marker scan empty + no-lost-commit, captured). This is a MERGE-INTO-the-pinned-branch (keeping the pin), distinct from the forbidden rule-(b) reset-onto-main (R2).

R — Diamond / shared dependency (same submodule reached by two parents)

- **Failure mode:** URL U is a submodule of both parent P1 and parent P2 (a diamond); a fan-out update advances U and must record the new gitlink in BOTH P1 and P2, but a partial run updates only P1 → the two parents disagree on U's version.
- **Git-level cause:** the submodule graph is a DAG, not a tree; one child can have many parents.
- **Mitigation:** the fan-out index (§5) enumerates ALL hosting superprojects of U (not just one) and the parent-pointer-bump is applied to EVERY hosting parent in one atomic run (Docs Chain all-or-nothing commit, §8): either every parent records the new gitlink or none does (rollback, exit 3). The topological order (R11) is respected across the whole diamond (U pushed before P1 and P2 both bump).

R — `.gitmodules` -vs- `.git/config` -vs- index three-way inconsistency

- **Failure mode:** the tracked `.gitmodules`, the local `.git/config`, and the index gitlink disagree (path present in `.gitmodules` but no gitlink in index, or vice-versa); the mechanism acts on a phantom submodule.
- **Git-level cause:** these three stores are updated by different commands and can drift.
- **Mitigation:** at run start the mechanism cross-checks all three (a §11.4.110-class clash detector) and REFUSES to sync a submodule whose three views disagree (REPORT, operator decides §11.4.66) — it does not guess which is authoritative (§11.4.6).

R — Evidence/analyzer bluff (the sync reports success but did nothing / did wrong)

- **Failure mode:** the sync exits 0 and reports "all in sync" while a copy actually still holds a stale gitlink, or a push silently landed on only one mirror — a §11.4 PASS-bluff at the sync layer.
 - **Git-level cause:** an exit code alone does not prove the sink-side state.
 - **Mitigation:** §11.4.69 sink-side evidence — every sync PASS cites a captured `git_sync_evidence.json` (per-copy pre/post gitlink SHA, per-mirror push confirmation via `git ls-remote`, fan-out convergence proof, lock-reap log). `verify` (read-only) is the deterministic gate (§11.4.50). The analyzer that reads the evidence is SELF-VALIDATED (§11.4.107(10)): a golden-good fixture (all copies converged, all mirrors pushed) MUST PASS; a golden-bad fixture (one copy stale / one mirror unpushed / a dangling gitlink) MUST FAIL and pinpoint the offender. An analyzer that passes its golden-bad is itself a bluff and a release blocker.
-

PART B – Design: reactive submodule auto-sync as a Docs Chain extension

. Why Docs Chain, not a new script

Docs Chain (§11.4.106) is the canonical mechanical sync engine; §11.4.106(A) forbids ad-hoc `sync_*` scripts and mandates using the engine. The submodule `sync` is *structurally the same problem* Docs Chain already solves for documents — a dependency graph where a change to one member must propagate, deterministically and atomically, to every dependent member — so it maps onto Docs Chain's primitives with a new node kind and transform family rather than a bespoke loop. Reusing the engine gives us, for free: content-hash change detection (§11.4.86), Kahn cycle rejection, declared-authority bidirectional `sync` with the both-dirty- $\Rightarrow$ -conflict rule (§11.4.6), atomic stage+rename+rollback (§8 / §9.2), `verify` as the deterministic pre-build gate (§11.4.50), and captured evidence (§11.4.69). The engine stays project-agnostic (§11.4.28); the ATMOSphere submodule roster is consumer data in `.docs_chain/contexts/*.yaml`.

. New node kinds and edge/transform family

Extend the Docs Chain node-kind enum (CONFIG_SCHEMA §3.1) with:

New node kind	Role	Direction	"content hash" is...
<code>git_submodule</code>	one physical checkout of a submodule at a path	input + derived	canonical of (remote-URL, current-branch, HEAD-SHA, tracking-branch, dirty?, init-state)
<code>git_superproject</code>	a hosting repo (main repo, or a parent submodule)	input + derived	canonical of (recorded gitlink SHAs of its children + its own branch/HEAD)
<code>git_remote_ref</code>	a mirror's branch tip (sink-side, read via <code>git ls-remote</code>)	sink	the remote SHA reported by <code>ls-remote</code>

Extend the transform builtins (CONFIG_SCHEMA §5.1) with a **git-adapter family** (all Go builtins in a new `internal/gitsync` package, so the engine stays self-contained and testable):

New builtin	Maps	Effect
<code>git-fetch-all</code>	<code>git_submodule</code> → <code>git_submodule</code>	<code>git submodule sync --recursive</code> + <code>git fetch --all --prune --tags</code> ; recompute node hash
<code>git-merge-onto-main</code>	<code>git_remote_ref</code> → <code>git_submodule</code>	§11.4.113 6-step: base=latest main tip, merge local, ff-only (never force)
<code>git-commit-branch</code>	<code>git_submodule</code> → <code>git_submodule</code>	ensure on tracking branch (R1), stage ONLY declared paths (never <code>-A</code> , R6), commit
<code>git-push-all-mirrors</code>	<code>git_submodule</code> → <code>git_remote_ref</code>	ff-only fan-out push to all upstreams (§2.1); per-mirror <code>ls-remote</code> confirm
<code>git-record-gitlink</code>	<code>git_submodule</code> → <code>git_superproject</code>	stage+commit the parent's new gitlink SHA (child-before-parent, R11)
<code>git-fanout-converge</code>	<code>git_submodule</code> → <code>git_submodule[]</code>	fetch+update every OTHER copy of the same canonical URL (R7/§5)
<code>git-constitution-flow</code>	<code>git_submodule</code> → <code>git_superproject</code>	the §11.4.26 ordered pipeline for the constitution node (R18)

Every git-adapter transform obeys the Docs Chain `exec /builtin` contract (CONFIG_SCHEMA §5.2): read only declared inputs, write only staged temp state, exit non-zero → rollback (exit 3), byte-stable/deterministic (§11.4.50). Because git ops touch the real repo (not a temp file), "staging" for these transforms means: do the mutation on a §9.2 hardlinked-backed working state and only *publish* (push / advance parent pointer) in the commit phase; any pre-commit error restores from the backup (R17).

. Event model – what triggers a sync

A sync run is triggered by any of (all funnel into the same `git_sync <context>` entry point):

1. **Explicit** — `docs_chain git-sync <context> / --all` (the operator or the §11.4.187 ruler invokes it; the primary path).
2. **Cadence** — a scheduled tick (§11.4.188 daily / after every trunk tag) for the merge-INTO- feature cadence and the rule-(a) main pull.
3. **Post-commit signal** — after ANY submodule commit+push lands anywhere (rule (c)), the committing process appends a `child-changed <url> <sha>` event to the Docs Chain append-only event stream (§11.4.116); the sync consumes it and fans out. This is a SIGNAL, not a git hook that re-enters (R12) — the re-entrancy guard (§6) makes a self-triggered signal a no-op.
4. **Watch (optional, later phase)** — an fsnotify daemon (`internal/watch` , ARCHITECTURE §11) on the tracked `.gitmodules` / gitlink set, debounced, runs `git-sync` on settle; guarded by §6 against self-triggering.

Every trigger is idempotent: a run with nothing dirty exits 0 with no writes (early-cutoff, §4).

. Per-copy submodule state machine (branch-tracking vs pinned)

The policy for each physical copy is decided from that copy's own HEAD state (R5 — per copy, not per URL). States and transitions:

```

git submodule status prefix / HEAD probe
|
+-----+-----+-----+-----+
+
|          |          |          |
| ' ' clean '+' drift 'U' conflict '-' uninit
detached HEAD
|          |          |          |
|          v          v          v          v
v
[CLEAN]      [DRIFT]      [CONFLICT]      [UNINIT]
[DETACHED]
|          |          |          |
|
branch == tracking? |          STOP, no writes      SKIP w/ reason
checkout tracking
| |          |          operator resolves (never delete)
branch (ff-only if
yes no          |          (§11.4.66)      (§11.4.69 skip)
ancestor) else
| |          v
-> [CONFLICT]
| |          record parent-pointer
| |          drift; do NOT reset
| v
| [PINNED] (operator on non-main branch, rule (b))
| |
| +-- rule (a) auto-update: SKIPPED
| +-- rule (c) parent-pointer bookkeeping: applies
| +-- §11.4.188 merge origin/main INTO pinned branch (bg, ff,
conflict-stops)
|
v
[BRANCH-TRACKING] (on the tracking branch, rule (a))
|
+-- git-fetch-all -> git-merge-onto-main (ff-only, §11.4.113)
+-- if local commits: git-commit-branch -> git-push-all-mirrors
(§2.1)
+-- git-fanout-converge (rule (c), §5) -> git-record-gitlink (child-
before-parent, R11)

```

. State determination is a FACT, not a guess

branch-tracking vs pinned is determined mechanically:

- current branch := `git -C <copy> symbolic-ref -q --short HEAD` (empty ⇒ `DETACHED`);
- tracking branch := `submodule.<name>.branch` from the hosting `.gitmodules` (default `main`);
- if `current == tracking` ⇒ `BRANCH-TRACKING` ;
- if `current != tracking` AND the copy is recorded in `.docs_chain/submodule_pins.json` as an operator-initiated pin ⇒ `PINNED` ;
- if `current != tracking` and NOT recorded as a pin ⇒ **ambiguous** → STOP + REPORT (§11.4.66), never guess (§11.4.6). (An operator registers a deliberate pin explicitly, e.g.
`docs_chain git-pin <copy> <branch> --reason "..."` , writing
`submodule_pins.json` . This makes "deliberate" auditable — the R2 mitigation.)

. `submodule_pins.json` (per copy, tracked)

```
{
  "pins": [
    { "copy_path": "device/rockchip/atmosphere/mpv-player",
      "branch": "feature/mistiq-vader",
      "reason": "T2 ATM-xxx work",
      "by": "User", "on": "2026-07-14",
      "canonical_url": "github.com/milos85vasic/ATMOSphere-MPV-Player" }
  ]
}
```

. Fan-out propagation algorithm (keyed by canonical submodule URL)

The registry `.docs_chain/submodule_registry.json` maps each canonical URL to every physical copy and every hosting superproject:

```

{
  "github.com/HelixDevelopment/HelixQA": {
    "copies": [
      { "copy_path": "tools/helixqa/HelixQA", "host_superproject": "<root>" },
      { "copy_path": ".../track2/.../tools/helixqa/HelixQA", "host_superproject": "<root2>" }
    ]
  }
}

```

Algorithm `fanout(url U, pushed_sha S)` :

```

1. reap stale locks for U (§11.4.180 / R16); try-claim advisory lock on U
   (§11.4.176 / R8).
   held-and-live -> requeue U, return.
2. for each copy C of U in registry:
   a. §11.4.84 quiescence check on C; not-quiescent -> ABORT C, report
   (R6).
   b. git submodule sync --recursive ; git fetch --all (R14).
   c. classify C's state (§4). CONFLICT/UNINIT/ambiguous -> skip C w/
   reason, report.
   d. BRANCH-TRACKING -> fast-forward C's tracking branch to S (ff-only;
   if not ff, R4
       merge-onto-latest then re-derive; never force, R3).
       PINNED -> do NOT move C's branch; only record the parent-pointer
       bump (below).
   e. stage the new gitlink S in C's host_superproject (child-before-
   parent already satisfied:
       S was pushed to all U-mirrors before fanout was entered, R11).
3. topologically order all touched host_superprojects (children before
   parents, R11/R20);
   for each, in order: git-record-gitlink (commit the new child SHA), then
   recurse UPWARD
   (the host superproject is itself a git_submodule of ITS parent ->
   fanout its own gitlink
       change up the chain, bounded by the visited-set + max-depth, R13).
4. atomic commit phase (Docs Chain §8): all staged gitlink commits +
   pushes land together or
   none (rollback, exit 3). fan-out convergence invariant asserted: every
   BRANCH-TRACKING copy
   of U now resolves HEAD == S; every PINNED copy reported as
   intentionally divergent.
5. release U's advisory lock; write git_sync_evidence.json.

```

Canonical-URL normalisation (R14): strip scheme (`git@...:` vs `https://.../`), lowercase host, strip trailing `.git` , so all spellings of one repo key to one entry.

. Re-entrancy guard (the sync-triggers-commit-triggers-sync loop)

Three defence layers (R12):

1. **Run-scoped flag** — `.docs_chain/SYNC_IN_PROGRESS` (holder PID + start epoch) written at run start, removed in `trap ... EXIT` . Any event/hook/watch trigger observing a LIVE guard (holder PID alive via `kill -0` , §11.4.180 liveness) is a NO-OP and returns immediately. A STALE guard (dead holder) is reaped like any other lock.
2. **Early-cutoff** (ARCHITECTURE §4) — after the sync's own commit, the `git_submodule` / `git_superproject` node hash equals the just-written value; the next pass computes "not dirty" and stops. This is the same mechanism that prevents `md↔db` oscillation.
3. **Per-run visited-set + max-iteration guard** (ARCHITECTURE §6.1) — belt-and-suspenders; fail loudly on any unexpected oscillation, never spin.

. Change-detection (content-hash, not mtime — § . .)

A `git_submodule` node is dirty when its freshly-computed hash differs from the hash stored in `state.json` . The hash is `sha256` of a canonical tuple, NOT the working-tree mtime:


```

node_hash(git_submodule) = sha256( canonical_url ||
                                   current_branch ||
                                   HEAD_sha      ||
                                   tracking_branch||
                                   dirty_bool    ||
                                   init_state  )

node_hash(git_superproject) = sha256( sorted list of (child_path,
recorded_gitlink_sha) ||
                                   own_branch || own_HEAD_sha )

node_hash(git_remote_ref) = the SHA from `git ls-remote <mirror>
<branch>`

```

This directly encodes §11.4.86: `git checkout` resets file mtime, so an mtime fingerprint silently misses real drift; the gitlink-SHA + branch-state hash is the drift-proof signal (the same reason the roster/corpus fingerprint hashes the sorted member list, not mtimes).

. Composition with the Docs Chain context-YAML model

A submodule-sync context is an ordinary `.docs_chain/contexts/<name>.yaml` using the new node kinds and git-adapter builtins. It composes with the existing exit-code + atomicity + verify model (ARCHITECTURE §12). Illustrative (PLANNED contract — not parsed today):

```

context: submodule_sync_owned      # consumer-owned data (§11.4.28); engine is generic
description: Recursive reactive auto-sync of owned submodules (rules a/b/c)
nodes:
  # each owned submodule copy is a git_submodule node
  mpv_copy:    { kind: git_submodule, path: device/rockchip/atmosphere/mpv-player }
  presenter_copy:{ kind: git_submodule, path: device/rockchip/atmosphere/presenter }
  helixqa_copy: { kind: git_submodule, path: tools/helixqa/HelixQA }
  constitution: { kind: git_submodule, path: constitution, constitution_workflow: true }
  root:        { kind: git_superproject, path: . }
  # sink-side mirror tips (read-only, §11.4.69)
  mpv_github:  { kind: git_remote_ref, path: "mpv-player#github/main" }
edges:
  # rule (a): on-main submodule -> fetch, merge-onto-main (ff-only), push all mirrors
  - { type: derive-from, from: mpv_github, to: mpv_copy, transform: git-merge-onto-main }
  - { type: derive-from, from: mpv_copy, to: mpv_github, transform: git-push-all-mirrors }
  # rule (c): a pushed child change fans out + records the parent gitlink (child-before-parent)
  - { type: derive-from, from: mpv_copy, to: root, transform: git-record-gitlink }
  # constitution submodule uses the §11.4.26 ordered pipeline
  - { type: derive-from, from: constitution, to: root, transform: git-constitution-flow }
transforms:
  git-merge-onto-main: { builtin: git-merge-onto-main }
  git-push-all-mirrors: { builtin: git-push-all-mirrors }
  git-record-gitlink: { builtin: git-record-gitlink }
  git-constitution-flow:{ builtin: git-constitution-flow }
policy:
  # NEW optional block for git-sync contexts
  force_push: forbidden      # §11.4.113 — enforced, no override
  quiescence_required: true  # §11.4.84
  stale_lock_reap: true      # §11.4.180
  backup_before_destructive: true  # §9.2
  max_recursion_depth: 8     # R13
  pins_file: .docs_chain/submodule_pins.json # rule (b)
  registry_file: .docs_chain/submodule_registry.json # §5 fan-out

```

The `sync` -edge both-dirty conflict rule (ARCHITECTURE §5) carries over verbatim: if a copy AND its mirror are both dirty in one run (a concurrent edit both sides), the run STOPS with a conflict (exit 2, no writes), operator resolves (§11.4.66) — no silent merge (§11.4.6).

. Ordering guarantee (child-before-parent-pointer) – restated as an invariant

For every affected superproject P and its child submodule C:

INV-ORDER: P's new gitlink SHA for C is committed+pushed ONLY AFTER C's commit is confirmed present on ALL of C's mirrors (verified via `git ls-remote`). Recursively: a grandchild is confirmed on its mirrors before the child records it, before the child is pushed, before the parent records the child.

Enforced by the topological order in `fanout` (§5 step 3) PLUS a belt-and-suspenders `git push --recurse-submodules=check` reachability probe (R11) before any superproject push: a push that would publish an unresolvable gitlink is refused.

. Anti-bluff surface

- **Captured evidence (§11.4.69):** every `git-sync` run writes `qa-results/docs_chain/git-sync/<run-id>/git_sync_evidence.json` — per-copy pre/post gitlink SHA, per-mirror push confirmation (`ls-remote`), fan-out convergence proof, lock-reap log, backup path (§9.2). A PASS with no evidence file is a §11.4 bluff.
- **verify gate (§11.4.50):** `docs_chain git-verify <context>` is read-only — it reports drift (a stale copy, an unpushed mirror, a dangling gitlink, a pin that drifted past its §11.4.188 cadence) and writes NOTHING; it is the pre-build/pre-merge gate.
- **Self-validated analyzer (§11.4.107(10)):** the evidence analyzer ships a golden-good fixture (all copies converged, all mirrors pushed, no dangling gitlink → MUST PASS) AND a golden-bad fixture (one copy stale / one mirror unpushed / a dangling gitlink / a force-push attempt → MUST FAIL, pinpointing the

offender) AND a negative-control (a legitimately-PINNED divergent copy → MUST PASS, not mis-flagged as drift). An analyzer that passes its golden-bad, or fails golden-good / the negative-control, is itself a bluff and a release blocker.

- **Deterministic consistency (§11.4.50):** N identical runs on an in-sync tree produce identical exit codes AND identical evidence hashes (no writes on a no-op run).

• Honest boundary (§ . .)

This design proves **internal git-graph consistency + safe convergence under the operator's three rules**. It does NOT prove that a submodule's CODE builds or that a bumped gitlink is functionally correct — that stays the §11.4.108 runtime-signature / §11.4.40 retest job. The mechanism guarantees *no lost commit, no force-push, no dangling gitlink, no stale duplicate, no detached-HEAD loss, no auto-clobber of a deliberate pin, and a clean `git status` on every touched copy* — not that the resulting tree is releasable. UNCONFIRMED items (marked inline): whether the current `/mnt/trackN` layout is worktree-shared (R9) — detected at runtime, never assumed; and the constitution submodule's own nested-submodule push topology — the mechanism reads it live rather than hardcoding it.

3

PART B — Phased implementation plan (tracked follow-on work items)

NONE of the following is implemented this run. This is a PLAN. Each phase is an ordered tracked work item (assign ATM-/CM- IDs per §11.4.54 when queued). Every phase carries: scope, files it would touch, its pre-build gate + paired §1.1 mutation + on-host test (four-layer per §11.4.4(b)), and acceptance criteria. Phases are sequential (a later phase depends on earlier ones); within a phase the sub-work is parallelisable (§11.4.58).

Phase — Spec + RED baseline (no engine code)

- **Scope:** freeze this design; write the failing acceptance spec (the RED test per §11.4.43/§11.4.115) that a not-yet-built `docs_chain git-sync` MUST make GREEN; enumerate the golden-good / golden-bad / negative-control fixtures.
- **Files:** `constitution/docs/research/reactive_submodule_sync/DESIGN.md` (this file), `.../SPEC.md`, `.../fixtures/{golden_good, golden_bad, negative_control}/` (throwaway git trees).
- **Gate:** `CM-SUBMODULE-SYNC-SPEC-PRESENT` (design + spec + fixtures exist).
- **Paired §1.1 mutation:** delete a fixture → gate FAILs.
- **On-host test:** `bash -n / sh -n` clean on any spec scripts (§11.4.67); fixtures are valid git repos (`git -C ... status` succeeds).
- **Acceptance:** design + spec + 3 fixtures committed; RED test exists and FAILS (nothing built yet — the honest RED per §11.4.115).

Phase — `internal/gitsync` core: state machine + content-hash + registry (read-only)

- **Scope:** the pure, side-effect-free core — classify each copy's state (§4), compute `git_submodule / git_superproject / git_remote_ref` node hashes (§7), build the URL-keyed registry (§5) and `submodule_pins.json` reader. NO writes to any repo yet.
- **Files:** `docs_chain/internal/gitsync/{state.go, hash.go, registry.go, pins.go, canonurl.go}`
 - `_test.go` siblings.
- **Gate:** `CM-GITSYNC-STATE-CLASSIFY` (state machine covers clean/drift/conflict/unit/ detached/pinned/ambiguous; canonical-URL normalisation collapses ssh/ https spellings).
- **Paired §1.1 mutation:** flip the `pinned` classifier to auto-update a non-main branch → gate FAILs (R2 guard proven).
- **On-host test:** run against the Phase 0 fixtures; assert classifications + node hashes are deterministic (§11.4.50, N runs identical).

- **Acceptance:** every fixture classifies correctly; a `git checkout` that resets mtime² does NOT change a node hash (§11.4.86 proven); `go test ./internal/gitsync/... -count=3` GREEN.

Phase — Safety primitives: quiescence, lock-reap, § backup, re-entrancy guard

- **Scope:** the guards that make writes safe, still with NO repo-mutating git op — just the lock/backup/guard machinery + their proofs.
- **Files:** `docs_chain/internal/gitsync/{quiescence.go, lockreap.go, backup.go, reentrancy.go}`
 - tests; reuse the constitution `host_session_safety` /lock helpers by reference (§11.4.28), do not copy.
- **Gate:** `CM-GITSYNC-SAFETY-PRIMITIVES` (lock-reap only reaps DEAD-holder locks via `kill -0` ; §9.2 hardlink backup taken before any destructive marker; re-entrancy flag honored).
- **Paired §1.1 mutation:** make lock-reap remove a LIVE-held lock → gate FAILs (§11.4.180 / §9.2 violation caught); strip the re-entrancy flag → the loop-guard test FAILs.
- **On-host test:** kill a fake holder mid-lock (leaving a dead-holder lock) → reap proceeds + logs REAPED + dead PID; a control run with a LIVE holder → KEEPS the lock + waits. Both captured (the §11.4.180 runtime signature).
- **Acceptance:**³ dead-holder reap + live-holder keep both proven with captured logs; §9.2 backup round-trips (restore yields byte-identical `.git`).

Phase — Rule (a): on-main fetch + merge-onto-main (ff-only) + multi-mirror push

- **Scope:** the first repo-mutating transforms — `git-fetch-all` , `git-merge-onto-main` (§11.4.113 6-step, ff-only, NEVER force), `git-commit-branch` (on-branch, never `-A`), `git-push-all-mirrors` (§2.1 fan-out + `ls-remote` confirm). Detached-HEAD → branch guard (R1).

- **Files:** docs_chain/internal/gitsync/transforms_rule_a.go + tests; a §11.4.109-class PreToolUse guard guard-no-force-push referenced (not copied).
- **Gate:** CM-GITSYNC-RULE-A-NO-FORCE (no push --force / --force-with-lease / +ref anywhere; merge-onto-latest-main only; commit never uses git add -A ; detached-HEAD never committed).
- **Paired §1.1 mutation:** inject a git push --force into the push transform → gate FAILs (§11.4.113); change commit to git add -A → gate FAILs (R6).
- **On-host test:** on a throwaway 2-mirror fixture: local commit on main → merge-onto-latest → ff push to BOTH mirrors → ls-remote confirms both tips advanced; a divergent mirror forces a fetch-merge-ff cycle (never force). Captured git_sync_evidence.json .
- **Acceptance:** RED merge-onto-main test flips GREEN; both mirrors converged with NO force; a detached-HEAD commit is refused; deterministic across N runs (§11.4.50).

Phase — Rule (b): PINNED-branch protection + § . . merge-INTO-feature cadence

- **Scope:** the pinned policy — rule (a) auto-update SKIPPED for a pinned copy; the §11.4.188 git merge origin/main INTO the pinned branch (background, ff-safe, conflict-stops, §9.2 backup for large merges, zero markers, post-merge smoke); git-pin / git-unpin CLI writing submodule_pins.json .
- **Files:** docs_chain/internal/gitsync/transforms_rule_b.go , cmd/docs_chain/git_pin.go + tests.
- **Gate:** CM-GITSYNC-PIN-PROTECTION (a pinned copy is NEVER reset onto main; the cadence is a MERGE-INTO-pinned not a rebase; ambiguous non-main-non-pinned STOPS + reports, never guesses).
- **Paired §1.1 mutation:** make a pinned copy auto-update onto main → gate FAILs (R2); replace the cadence merge with a rebase of the shared branch → gate FAILs (§11.4.188 / §11.4.113).
- **On-host test:** a copy on feature/x registered as a pin → a rule-(a) run leaves its branch untouched (evidence: pre==post branch+HEAD); a cadence tick merges origin/main INTO feature/x (ff/merge, no markers, smoke GREEN, no lost commit).

- **Acceptance:** pinned branch survives every rule-(a) run byte-identical; cadence merge lands with zero conflict markers + no lost commit; ambiguous state stops+reports.

Phase – Rule (c): URL-keyed fan-out + child-before-parent + diamond + recursion bound

- **Scope:** the `git-fanout-converge` + `git-record-gitlink` transforms; the §5 fanout algorithm with INV-ORDER (R11), the diamond multi-parent bump (R20), the visited-set + max- depth recursion bound + `.gitmodules` -cycle refusal (R13), and the atomic all-or-nothing commit across all touched superprojects (Docs Chain §8).
- **Files:** `docs_chain/internal/gitsync/{fanout.go, record_gitlink.go, recursion.go}` + tests.
- **Gate:** `CM-GITSYNC-FANOUT-ORDER` (child pushed to ALL mirrors before ANY parent bumps its gitlink; `push --recurse-submodules=check` reachability probe passes; recursion bounded; `.gitmodules` cycle refused).
- **Paired §1.1 mutation:** reorder to bump the parent gitlink before the child push → gate FAILs (R11 dangling gitlink); remove the visited-set → the cycle-fixture recurses → gate FAILs (R13).
- **On-host test:** a 2-copy + diamond fixture: change on copy-1 → fan-out converges copy-2 → BOTH host superprojects record the new gitlink atomically → a fresh clone of each superproject resolves the gitlink (no `reference is not a tree`). Captured convergence proof.
- **Acceptance:** every branch-tracking copy converges to the pushed SHA; pinned copies reported divergent (not force-converged); zero dangling gitlinks (clone-resolves); diamond parents agree.

Phase – Constitution § . . flow + worktree-hazard refusal + three-way clash detector

- **Scope:** `git-constitution-flow` (the §11.4.26 ordered pipeline: fetch+pull-ff FIRST → apply → validate → push all upstreams → cascade → bump consumer pointer in same parent commit); the R9 refusal to operate through a

shared-common-dir worktree superproject; the R21 three-way (`.gitmodules / .git/config /index`) clash detector; the R14 `git submodule sync --recursive` URL-drift reconciliation.


- **Files:** `docs_chain/internal/gitsync/`
`{constitution_flow.go,worktree_guard.go,clash.go}` + tests.
- **Gate:** `CM-GITSYNC-CONSTITUTION-AND-GUARDS` (constitution node runs the §11.4.26 order; shared-common-dir worktree superproject is refused; three-way inconsistency stops+reports).
- **Paired §1.1 mutation:** skip the fetch-first step of the constitution flow → gate FAILs (§11.4.26); allow a shared-common-dir worktree → gate FAILs (R9).
- **On-host test:** a fixture constitution submodule with 4 mirrors → the flow pushes all 4 + bumps the consumer pointer in the same commit; a worktree-shared superproject fixture → refused with the §11.4.179 remediation message.
- **Acceptance:** constitution change lands on ALL upstreams + pointer bumped atomically; worktree hazard refused; three-way clash stops without a guess.

Phase – CLI/daemon + verify gate + self-validated analyzer + ATMOSphere wiring

- **Scope:** `docs_chain git-sync|git-verify|git-graph` CLI (mirroring ARCHITECTURE §12 exit codes 0/2/3/4); the read-only `git-verify` pre-build gate (§11.4.50); the self-validated evidence analyzer (§11.4.107(10), golden-good/golden-bad/negative-control wired into meta- test); the optional `fsnotify` watch daemon (§6-guarded); and the CONSUMER-side ATMOSphere context YAML (`.docs_chain/contexts/submodule_sync_owned.yaml`) + registry + pins seed.
- **Files:** `docs_chain/cmd/docs_chain/git_sync.go` , `docs_chain/internal/gitsync/analyzer.go` , `docs_chain/internal/watch/gitsync_watch.go` ; CONSUMER: `.docs_chain/contexts/*.yaml` , `.docs_chain/submodule_registry.json` , `.docs_chain/submodule_pins.json` , a pre-build gate wiring `git-verify` .
- **Gate:** `CM-GITSYNC-VERIFY-WIRED` + `CM-GITSYNC-ANALYZER-SELFVALIDATED` (verify is read-only and wired into the consumer pre-build; analyzer PASSES golden-good + negative-control, FAILs golden-bad).

- **Paired §1.1 mutation:** make `git-verify` write (not read-only) → gate FAILs; make the analyzer pass its golden-bad fixture → self-validation FAILs (the §11.4.107(10) bluff-proof).
- **On-host test:** end-to-end on the ATMOSphere context against isolated-clone fixtures: a change fans out + records gitlinks + pushes all mirrors + `git-verify` returns 0; then corrupt one copy → `git-verify` returns non-zero pinpointing it. Captured evidence for both.
- **Acceptance:** the Phase 0 RED acceptance spec flips fully GREEN; `git-verify` is a deterministic gate the consumer pre-build invokes; the analyzer is bluff-proof; the ATMOSphere owned-submodule context syncs the three rules end-to-end with captured evidence. Manual-QA final confirmation per §11.4.185 before any release tag.

Phase dependency summary

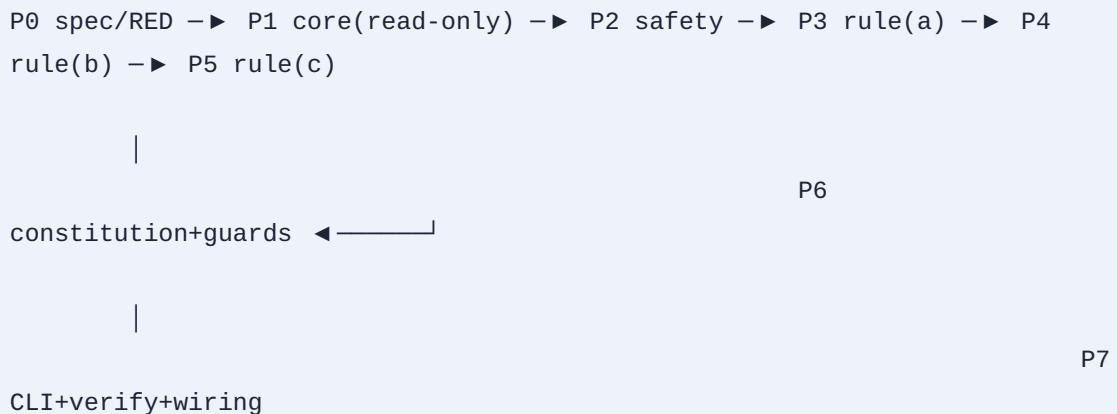

Each phase composes with §11.4.4(b) four-layer coverage, §11.4.43/§11.4.115 RED-first, §11.4.50 determinism, §11.4.69 captured evidence, §11.4.107(10) self-validated analyzers, §11.4.125/ §11.4.142 code-review-before-build, and §11.4.108 runtime-signature-as-done. The engine changes stay in `docs_chain/` (project-agnostic, §11.4.28); the ATMOSphere submodule roster/registry/ pins are consumer data (§11.4.35).

Sources verified

- [S1] git-scm.com Book — *Git Tools — Submodules* (detached-HEAD default + commit-loss warning; `submodule.<name>.branch` tracking; superproject records exact SHA mode 160000; `git push --recurse-submodules=check|on-demand` child-before-parent; dirty-checkout / merge- conflict warnings): <https://git-scm.com/book/en/v2/Git-Tools-Submodules> — **fetchd + verified this session.**
- [S2] git-scm.com — *git-worktree(1)* (`$GIT_COMMON_DIR` shared object store + shared `refs/heads/*` ; per-worktree `HEAD / index` ; "Multiple checkout ... still experimental ... support for submodules is incomplete ... NOT recommended to make multiple checkouts of a superproject"; `git worktree lock` ; stale `gitdir / repair`): <https://git-scm.com/docs/git-worktree> — **fetchd + verified this session.**
- [S3] git-scm.com — *git-submodule(1)* (`git submodule sync [--recursive]` URL-drift reconciliation; `update --init --recursive` nested recursion; `foreach --recursive` ; `status prefixes - / + / U` ; `submodule.<name>.update = checkout/rebase/merge/none`; `--remote --rebase|--merge`): <https://git-scm.com/docs/git-submodule> — **fetchd + verified this session.**
- Constitution anchors (read in-repo from `constitution/Constitution.md` mirrors this session): §11.4.113 (absolute no-force-push), §9.2 (zero-risk data safety), §11.4.84 (quiescence), §11.4.180 (stale-lock auto-reap), §11.4.26 (constitution-update workflow), §11.4.188 (main → feature merge cadence), §11.4.86 (content-hash fingerprint), §11.4.69 (sink-side evidence), §11.4.107(10) (self-validated analyzer), §2.1 (multi-upstream push), §11.4.28/ §11.4.31 (submodule decoupling / dependency manifest), §11.4.106 (Docs Chain engine), §11.4.176–§11.4.182 (multi-track work-division / track-qualified identity / own- `.git` isolation).
- Docs Chain engine docs (read in-repo this session): `docs_chain/docs/ARCHITECTURE.md` , `docs_chain/docs/CONFIG_SCHEMA.md` (node/edge/ transform model, exit codes, atomic commit, sync-edge authority + both-dirty conflict, early-cutoff, Kahn cycle refusal, CLI/verify).

UNCONFIRMED (per §11.4.6): whether the live `/mnt/trackN` layout is worktree-shared vs isolated-clone on this host (the mechanism DETECTS this at runtime, R9, and refuses the worktree- shared case rather than assuming); the constitution submodule's own nested-submodule push topology (read live, not hardcoded). The `index.lock / HEAD.lock` holder-death behaviour (R16) is grounded in the project's own §11.4.180 forensic anchor (captured evidence) rather than a re-fetched git man-page this session.