

SOL-^{0 3} _needled_measurement

SOL- — The Needled Measurement Primitive

Field	Value
Revision	1
Last modified	2026-07-22T20:55:00Z
Rank	4 (and meta — it protects every other solution's own measurements)
Closes	PC-5 (instruments produce false findings), MU-5 (wrong mechanism → wrong remedy), MU-6 (counts read as state)
Seam	every load-bearing measurement, in every gate/guard/sweep/report
POC	<code>poc/sol03_needled_measurement/</code> — GREEN 8/8, RED-first; the SIGPIPE hazard reproduced INSIDE the test
Anchors mechanized (no new anchor)	§11.4.201(6)(7)(8), §11.4.6
Prior art status	The literature has NO named SE discipline for this (EXTERNAL_RESEARCH SYN-3 item 2). Closest prior art: epidemiology's negative/positive-control methodology (R5.3, S60–S62), which independently derives the needle-class-matching condition.

. The measured problem

- **22 instrument traps catalogued from one release cycle, hit by 4 independent agents; ≥ 10 produced *reported findings*, in both directions [M17].** One environmental root cause (host grep is a different regex engine) unified ≥ 4 "independent" mistakes.
- **Corpus 2: 6 historical + 2 live-during-analysis instances (§6)** — swallowed restart failures serving the wrong provider while the config read back correct; a test runner with silent false-greens; a BRE guard dropping a function; SIGPIPE aborting session resolution; a `$`-token eaten from a commit subject; a Verified count off by 111.
- **Live in THIS session (instance #1):** the first RED-evidence capture for SOL-01 recorded `exit=0` — the exit status of `tee`, not of the test (pipeline-exit trap). Caught and re-captured; recorded here because it demonstrates the base rate even under §11.4.201 discipline (the same honesty corpus 2 §6.7 practiced).
- **Live measurement, this host, this session** (commands in the POC test):

Measurement	Result
<code>cat 2MB-payload grep -q NEEDLE</code> under <code>set -o pipefail</code> , needle on line 1, 400 iterations	400/400 read the PRESENT literal as ABSENT
Same, without <code>pipefail</code>	0/400
Files in the consuming tree carrying BOTH <code>pipefail</code> and <code> grep -q</code>	60 files, 414 piped <code>grep -q</code> sites (scripts/, tests/, constitution/scripts/ control-needed)


The dispatch brief's figure (8/400, 56 latent sites) was measured earlier at a different payload size/scope; this session's re-measurement shows the hazard **saturates to deterministic (400/400) as payload grows** — the worst possible scaling: the bigger the corpus being checked, the more certainly a present token reads as absent. The 414 sites are the *exposure surface* (upper bound): a site is

only exploitable when the producer writes more than a pipe buffer after the match — but which sites those are changes with data volume, which is exactly why a per-site audit cannot close this class and a primitive can.

- External confirmation (R5.1, S53–S56): shell instruments' dominant failure mode is a **clean, plausible, wrong answer** — and no strict-mode configuration fixes it; `pipefail` itself *introduces* the class above.

. The mechanism

A measurement is never a bare command; it is a **primitive that carries its own controls**:

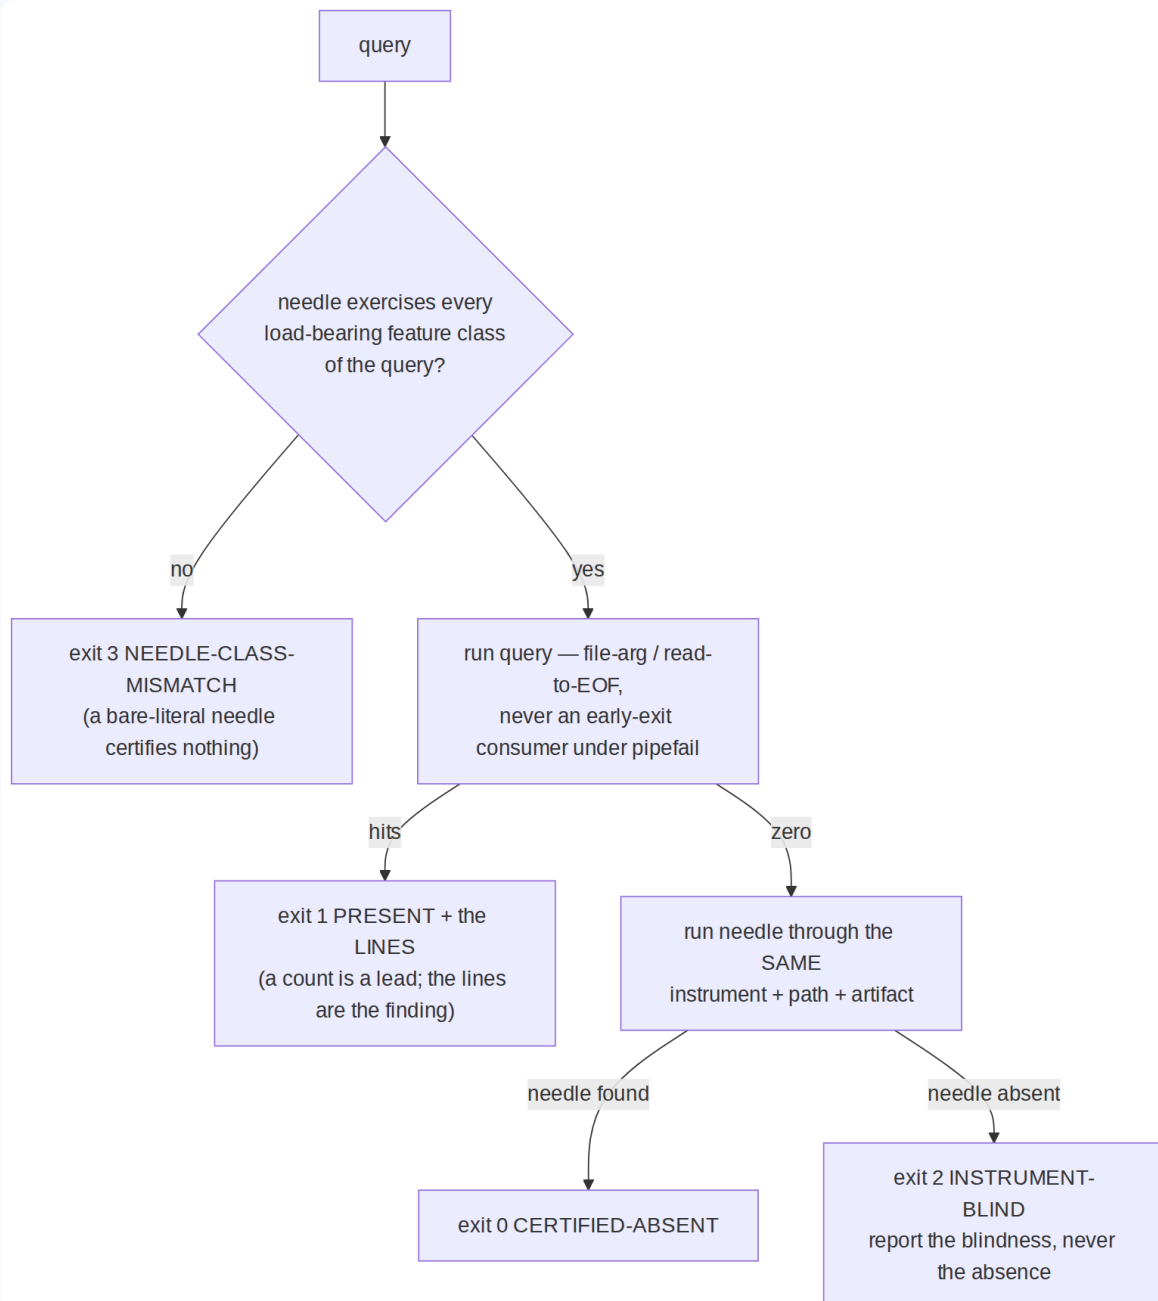

Four rules, each pinned to a measured failure:

1. **A null is not evidence until a needle traverses the same path** (`nq_absent`) — the M17 false-null class. Positive control, per R5.3.
2. **The needle must share the query's load-bearing feature classes** (alternation, grouping, anchors, escapes — `_nq_features`). A literal needle sails through the dialect layer that is eating the query (the host-grep `\|` incident) and would "certify" a blind zero — the exact epidemiology validity condition (S62): a control certifies only the error sources it shares.
3. **Presence output carries the lines, not just the count** (MU-6: twice in one cycle a count was converted into a finding without reading the lines).

4. **Consumers read producers to EOF** (`nq_stream_contains` uses `grep -c` on a captured stream, never `grep -q` on a live pipe) — the SIGPIPE/pipefail class is closed *by construction*, not by auditing 414 sites.
5. **The instrument is injectable** (`NQ_GREP`) so the blind-instrument path is itself testable — an unfalsifiable validator is unvalidated instrumentation (§11.4.115(F) applied to measurements). The POC's golden-bad case injects a see-nothing `grep` and asserts the primitive says `INSTRUMENT-BLIND` , never `CERTIFIED-ABSENT` .

. POC results

RED (missing lib, exit 1) → GREEN **8/8**, including: blind-instrument returns 2 never 0; carrier prose does not false-match a structure-anchored query (negative control); featureless needle on an alternation query refused (exit 3) while a class-matched needle certifies; and the pipefail hazard **reproduced live inside the test** (F1) with the primitive returning PRESENT on the same payload (F2).

. The failure this makes IMPOSSIBLE

For any measurement routed through the primitive: an **unverified null cannot be reported** — the API has no code path that emits "absent" without a sighted, class-matched needle; a SIGPIPE-truncated stream cannot produce a false absence (the producer is always drained); a blind instrument yields a loud `INSTRUMENT-BLIND` , which is a *finding about the instrument* (MU-5's requirement: prove the mechanism before choosing the remedy).

. What it still does NOT catch (honest boundary)

1. **False-MATCH beyond structure.** The primitive enforces structure-anchored queries by making carriers a first-class test case, but a poorly chosen query pattern can still match a carrier; the negative-control fixture discipline (per query class) is the countermeasure, and choosing the pattern remains authorship.

2. **Measurements not routed through it.** This is a library, not an interception layer; the 414 existing sites stay exposed until migrated. Adoption mechanics (a lint that flags bare `| grep -q` under pipefail as a migration queue) are a consumer follow-up — a count-visible queue, not claimed here.
3. **Non-grep instruments** (jq, awk, sqlite, curl) need the same wrapper pattern per tool; the POC ships the grep instance and the design generalizes, but each tool's blind-modes are its own (e.g. `find` 's exit-0-on-no-match, `-newermt` host unreliability) — per-tool needles are owed at integration.
4. **Feature-class extractor is a closed approximation** — it covers {alternation, group, anchors, escapes}; exotic PCRE features are outside the set and would need extending. Stated, not hidden.