

# Helix Thready — Per-Surface Quickstarts

- Table of contents
- 1. Choose your surface (diagram)
  - 2. Admin bootstrap (2 minutes)
  - 3. Web portal quickstart
  - 4. CLI quickstart
  - 5. TUI quickstart
  - 6. SDK quickstart (Go)
  - 7. Mobile quickstart (evaluation only)
  - 8. What to read next

| Rev | Date       | Author                      | Change                                                    |
|-----|------------|-----------------------------|-----------------------------------------------------------|
| 1   | 2026-07-22 | swarm (user-guides, Pass 3) | New: one five-minute quickstart per surface, consolidated |


This page is the **fast on-ramp**: a self-contained ~5-minute quickstart for **each surface** (Web, CLI, TUI, Mobile, SDK) plus the Admin bootstrap, each cross-linked to its deep guide. It assumes a system is already installed and reachable ([installation.md](#)) and configured ([configuration.md](#)). Every command here uses **VERIFIED** module names where one exists; `[DEFAULT — adjustable]` where a Thready-specific name is proposed.

**Zero-version reminder.** Where a surface depends on a `[BUILD-NEW]` /scaffold subsystem (mobile secure storage `[GAP: 7]` , Max reading `[GAP: 3]` , generic HTTP downloads `[GAP: 4]` ), the quickstart calls it out and points at the honest status in the deep guide. Web + CLI are the recommended zero-version surfaces.

## Table of contents

- 1. Choose your surface (diagram)
- 2. Admin bootstrap (2 minutes)
- 3. Web portal quickstart
- 4. CLI quickstart
- 5. TUI quickstart
- 6. SDK quickstart (Go)
- 7. Mobile quickstart (evaluation only)
- 8. What to read next

## 1. Choose your surface (diagram)

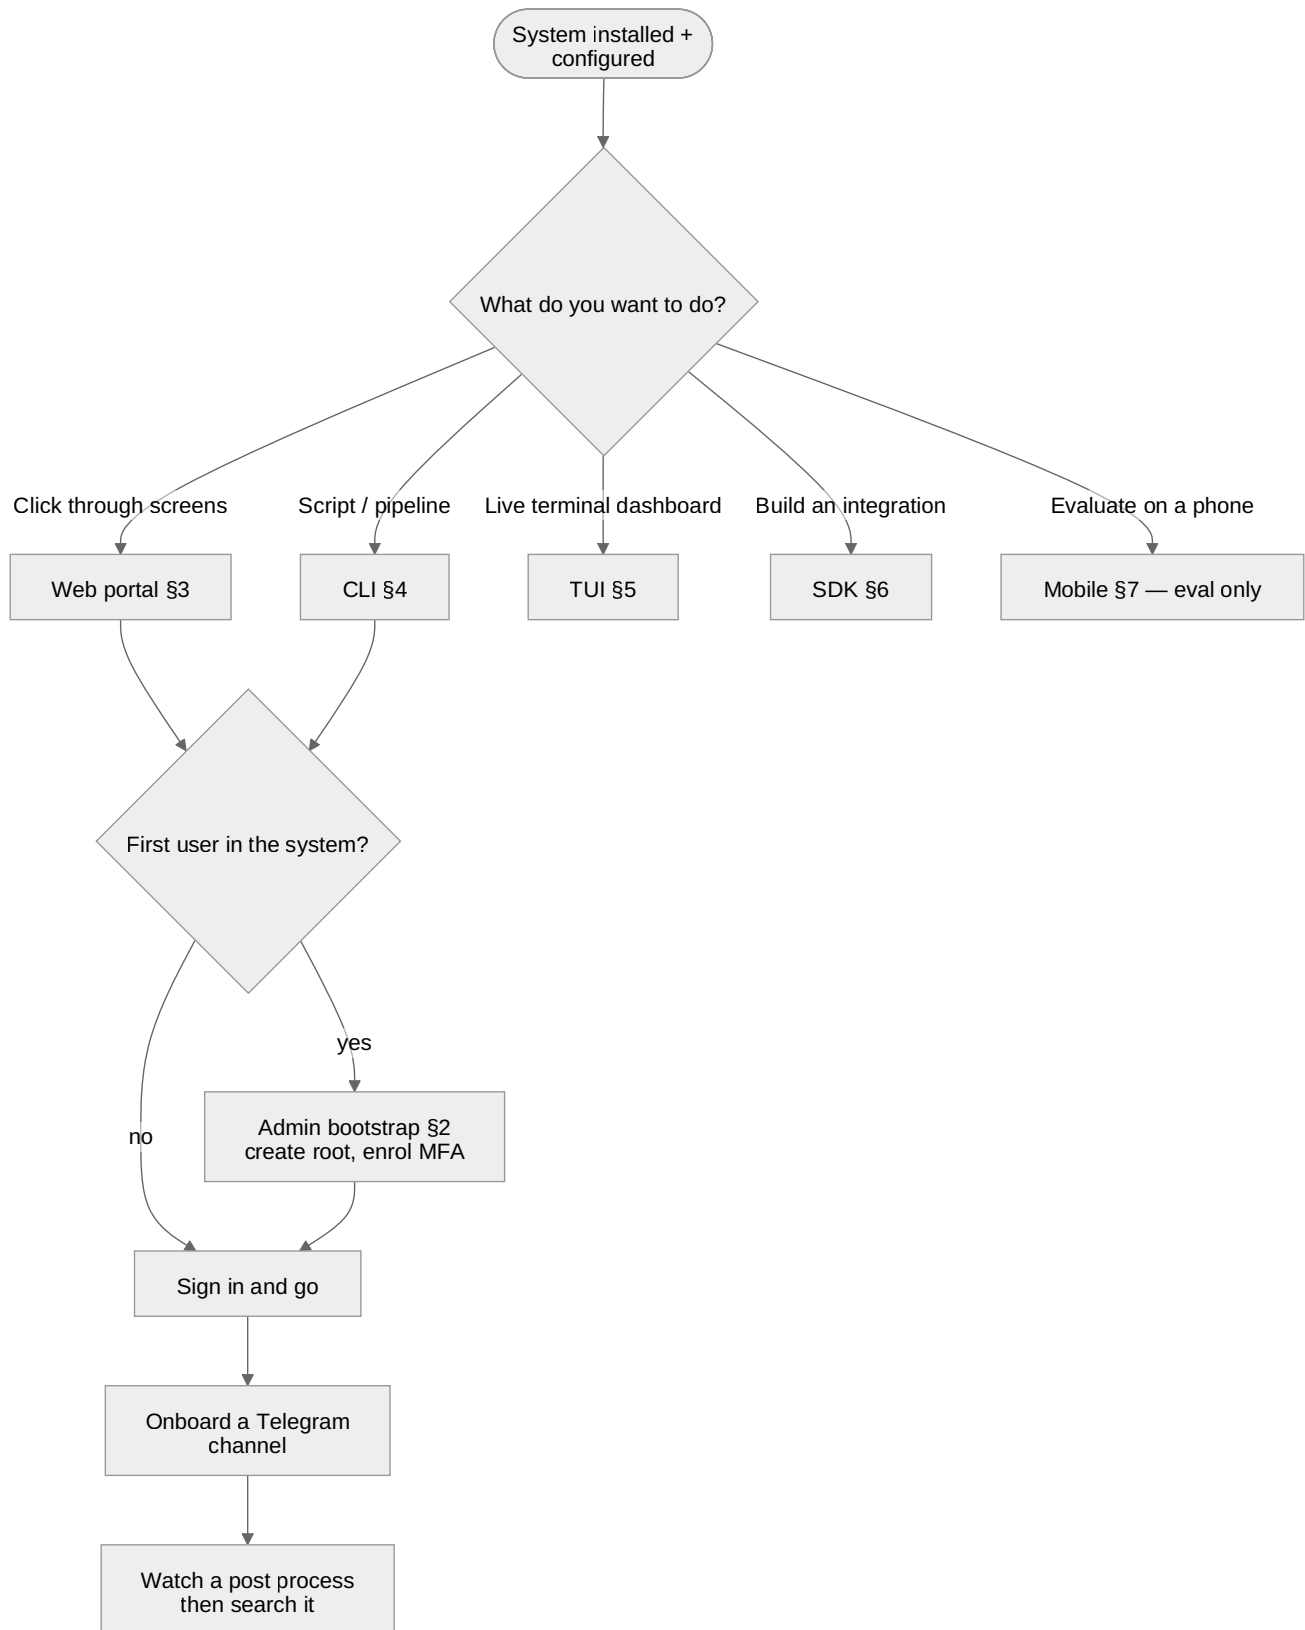

Rendered PNG/SVG exported via Docs Chain (§11.4.65). Source: [diagrams/quickstart-surface.mmd](#).

**Explanation (for readers/models that cannot see the diagram).** The quickstart map begins where installation and configuration leave off — a system that is already running and reachable — and its first decision is intentionally about *intent*, not *role*, because the surface you pick depends on what you are trying to do rather than who you are. Clicking through screens routes to the Web portal; scripting or CI routes to the CLI; a live terminal dashboard routes to the TUI; building software that calls Thready routes to the SDK; and evaluating on a phone routes to the mobile path, which is flagged “eval only” because of the secure-storage gap.

The second decision is whether you are the **first** human in the system. This matters because exactly one Root Admin must be bootstrapped before anyone can be invited, and that bootstrap is a one-time, owner-only action. If you are first, you pass through the Admin bootstrap (create the root account, enrol TOTP MFA) before doing anything else; if the system already has users, you simply sign in.

From that point every surface converges on the same two-step “hello world” for Thready: **onboard a Telegram channel** so the system has something to read, then **watch a post process and search it** so you see the whole pipeline — ingest, classify, dispatch Skills, embed, reply — end to end. The map is deliberately a funnel: different surfaces, same first success. Each numbered node maps to a section below and, through it, to the full surface guide.

## 2. Admin bootstrap (2 minutes)

Run once, by the system owner, at deploy time. Idempotent — refuses to run twice.

```
./thready admin bootstrap \
  --email "$THREADY_ROOT_EMAIL" \
  --from-secret THREADY_ROOT_PASSWORD
#   ✓ Root Admin created. MFA enrolment required at first login (TOTP).
```

Then sign in (Web or CLI) and **enrol TOTP MFA** — the portal forces this before any other screen. Full detail: [installation.md §6](#) and [root-admin-guide.md §3](#).

## 3. Web portal quickstart

1. Open your environment URL — production <https://thready.hxd3v.com>, staging <https://sta.thready.hxd3v.com>, dev <https://dev.thready.hxd3v.com>.
2. **Sign in** (email + password). If you are an Admin, complete **TOTP MFA** enrolment when prompted.
3. **Dashboard → Channels → Add channel** → paste a Telegram invite link → **Save**.
4. Watch the **live event feed** on the dashboard for `post.received` → `post.processed`.
5. **Search** box → type a query → open a result → it deep-links to the source post/asset.

If the dashboard shows an amber “*Semantic search degraded: non-semantic embedder*” banner, the server is on the hash embedder `[GAP: 1]` — fix per [troubleshooting §5](#). Deep guide: [web-portal-guide.md](#).

## 4. CLI quickstart

```
# 1. Install + authenticate (session stored in OS keyring)
go install github.com/HelixDevelopment/helix_thready/cmd/thready@latest
thready auth login
thready auth whoami                # confirm identity + roles

# 2. Onboard a Telegram channel (Account Admin+)
thready channel add --messenger telegram --invite "https://t.me/+622y04wzy_YzOTA0"

# 3. Watch it process live, then search
thready events tail --type post.processed &
thready search "kubernetes operator retry backoff" -o json | jq '.[0]'
```

Everything the Web does, the CLI does (headless, pipeline-friendly). Exit codes drive automation ( `0` ok, `77` forbidden, `75` retrieable). Deep guide: [cli-reference.md](#).

## 5. TUI quickstart

```
thready auth login      # once
thready tui             # full-screen dashboard
```

Then: `gc` → Channels, `Enter` to open one; post a `#Research #Video` message in that Telegram channel from your account; watch the bottom event stream go `post.received` → `skill.dispatch` → `post.processed`; `gt` → Threads → open the post to see its status reply and new assets. Keys: `/` search, `r` reprocess, `?` help, `q` quit. Deep guide: [tui-usage.md](#).

## 6. SDK quickstart (Go)

```
client, _ := thready.New(
    thready.WithServer("https://thready.hxd3v.com"),
    thready.WithAPIKeyFromEnv("THREADY_TOKEN"), // mint via: thready auth token --scopes read:search
)
defer client.Close()

results, _ := client.Search(ctx, thready.SearchRequest{Query: "rust async runtime", Limit: 20})
for _, r := range results { fmt.Printf("%.3f %s %s\n", r.Score, r.Kind, r.Title) }
```

Use a **scoped API key** for automation, not an interactive JWT. If `results` come back with `Degraded: true`, the server is on the hash embedder — don't trust the ranking. Deep guide: [sdk-quickstart.md](#).

## 7. Mobile quickstart (evaluation only)

[GAP: 7] **Do not use a real account.** `Security-KMP` mobile secure storage is an in-memory stub; mobile builds are for **internal evaluation on non-sensitive accounts** only.

1. Accept the **Firebase App Distribution** invite; install the staging build.
2. Sign in against `sta.thready.hxd3v.com`; enrol TOTP if you are an Admin.
3. Browse a channel, run a search, open an asset — evaluation only.
4. Confirm the store backend: in-app diagnostics → *Secure storage backend* should read `in-memory (stub)` today. Deep guide: `mobile-guide.md` §3.

## 8. What to read next

| You are a...     | Read                                                  |
|------------------|-------------------------------------------------------|
| System owner     | <code>root-admin-guide.md</code>                      |
| Account operator | <code>account-admin-guide.md</code>                   |
| Consumer         | <code>end-user-manual.md</code>                       |
| Anyone stuck     | <code>troubleshooting.md</code> , <code>faq.md</code> |
| Configuring      | <code>configuration.md</code>                         |

Made with love ♥ by Helix Development.