

MVP2 Shared Core Specification: `libhelix\_core`

MVP2 Shared Core Specification: libhelix_core

Revision: 3 Last modified: 2026-07-04T16:30:00Z

Revision 3 changelog: added the two Mermaid diagrams this document previously had none of (docs/research/CROSS_CUTTING_GAP_ANALYSIS.md §3.2 named this the single most architecturally central mvp2/ document with the largest diagram gap): §3.1 gains a state-machine diagram for the canonical ConnectionStatus FSM directly below its enum definition; §6 gains an architecture/FFI-boundary diagram showing the crate's module structure and how each platform binding (UniFFI Kotlin/Swift, flutter_rust_bridge, Tauri commands, wasm-bindgen, cbindgen C ABI) reaches it. No prose or code content changed.

Version: 0.2.1-MVP2 **Date:** 2026-01-21 (Revision 2: 2026-07-04) **Status:** Draft for Review **Classification:** Technical Architecture Specification

Revision 2 changelog: reconciled the §5.1 minimum-OS-version column against the product-level minimums declared in MVP2_ARCHITECTURE.md §1.2 and MVP2_OVERVIEW.md §4.1 (this document's target table previously stated a looser Rust-toolchain floor, not the shipped product's supported minimum); marked the OpenVPN protocol enum variant explicitly as a reserved/unimplemented placeholder; added §5.5 Supply-Chain & Build Integrity (reproducible builds + SBOM generation).

Table of Contents

1. [Core Library Overview](#)
2. [Module Architecture](#)

3. [Public API Design](#)
 4. [Protocol Implementation Details](#)
 5. [Cross-Compilation Configuration](#)
 6. [FFI & Binding Generation](#)
 7. [Testing Strategy](#)
 8. [Security Architecture](#)
 9. [Performance Budget](#)
 10. [Appendices](#)
-

1. Core Library Overview

1.1 Purpose and Scope

`libhelix_core` is a Rust shared library that powers all Helix VPN platform clients. It encapsulates the complete VPN engine -- protocol implementations, cryptographic operations, TUN interface management, routing, firewall rules, DNS resolution, and traffic obfuscation -- behind a single, platform-agnostic public API.

1.2 Design Principles

Principle	Rationale	Implementation
Zero-copy packet processing	Minimize CPU overhead and memory allocations per packet	<code>bytes::Bytes</code> for refcounted buffers; <code>zerocopy</code> for structured parsing
Async-first	Handle thousands of concurrent connections efficiently	Tokio runtime with work-stealing scheduler
no_std where possible	Support constrained environments (embedded, WASM)	Core crypto uses heapless; allocator-free path for packet parsing
Single shared runtime	FFI callers must not create runtimes per-call	Static <code>LazyLock<Runtime></code> pattern
Fail-closed security	Default to dropping traffic on error	All firewall implementations block on error
Memory safety	Eliminate entire vulnerability classes	Rust ownership + <code>zeroize</code> for secrets

1.3 Target Platforms and Cross-Compilation Targets

Platform	Target Triple	Tier	Artifact	Code Reuse
macOS (Intel)	x86_64-apple-darwin	Tier 2	.dylib / .a	~85%
macOS (Apple Silicon)	aarch64-apple-darwin	Tier 2	.dylib / .a	~85%
iOS (Device)	aarch64-apple-ios	Tier 2	XCFramework	~72%
iOS (Simulator)	aarch64-apple-ios-sim	Tier 2	XCFramework	~72%
Windows (x64)	x86_64-pc-windows-msvc	Tier 1	.dll	~80%
Windows (ARM64)	aarch64-pc-windows-msvc	Tier 2	.dll	~80%
Linux (x64)	x86_64-unknown-linux-gnu	Tier 1	.so	~85%
Linux (ARM64)	aarch64-unknown-linux-gnu	Tier 1	.so	~85%
Android (ARM64)	aarch64-linux-android	Tier 2	.so	~72%
Android (ARMv7)	armv7-linux-androideabi	Tier 2	.so	~72%
Android (x86_64)	x86_64-linux-android	Tier 2	.so	~72%
HarmonyOS	aarch64-unknown-linux-ohos	Tier 2	.so	~70%
Aurora OS	aarch64-unknown-linux-gnu	Tier 2	.so	~75%
Web/Browser	wasm32-unknown-unknown	Tier 2	.wasm	~45%

This table summarizes artifact type and code-reuse percentage per target; see §5.1 for the authoritative product-supported minimum OS version per target (kept in one place to avoid the two tables drifting out of sync).

1.4 Crate Structure

The core library is organized as a single Cargo workspace member for the MVP2 scope:

```
helix-core/
├─ Cargo.toml           # Workspace member definition
├─ uniffi.toml          # UniFFI binding configuration
├─ cbindgen.toml        # C header generation config
├─ build.rs             # Build script for FFI generation
└─ src/
    ├─ lib.rs           # Public API, feature flags
    ├─ engine/          # VPN engine orchestration
    ├─ protocol/        # VPN protocol implementations
    ├─ crypto/          # Cryptographic primitives
    ├─ tun/             # TUN/TAP interface abstraction
    ├─ routing/         # Route management
    ├─ firewall/        # Kill switch / firewall rules
    ├─ dns/             # DNS management
    ├─ obfuscation/     # Traffic obfuscation
    ├─ platform/        # Platform abstraction & FFI
    └─ utils/           # Logging, errors, helpers
```

1.5 Feature Flags

[features]

```
default = ["wireguard", "dns", "full-tunnel"]
```

Protocol selection

```
wireguard = ["boringtun"]
```

```
shadowsocks = ["shadowsocks-rust"]
```

```
masque = ["quinn", "h3"]
```

```
openvpn = [] # Placeholder for future
```

Security features

```
kill-switch = ["firewall"]
```

```
split-tunnel = ["routing"]
```

```
post-quantum = ["ml-kem"]
```

```
daita = ["obfuscation/daita"]
```

Platform targets

```
android = ["jni", "android-logger"]
```

```
ios = ["uniffi/ios"]
```

```
wasm = ["wasm-bindgen", "getrandom/js"]
```

Build profiles

```
test-mock-tun = [] # Mock TUN for unit tests
```

```
integration-tests = [] # Extended integration test suite
```

2. Module Architecture

2.1 Top-Level Library (src/lib.rs)

```
/// libhelix_core - Shared VPN core for all Helix VPN platforms
///
/// # Feature Flags
/// - `wireguard`: Enable WireGuard protocol support
/// - `shadowsocks`: Enable Shadowsocks obfuscation
/// - `masque`: Enable MASQUE/QUIC transport
/// - `kill-switch`: Enable firewall-based kill switch
/// - `split-tunnel`: Enable per-app/route split tunneling
/// - `post-quantum`: Enable ML-KEM hybrid key exchange

#![cfg_attr(feature = "wasm", no_std)]
#![deny(unsafe_code)]
#![warn(missing_docs)]

pub mod engine;
pub mod protocol;
pub mod crypto;
pub mod tun;
pub mod routing;
pub mod firewall;
pub mod dns;
pub mod obfuscation;
pub mod platform;
pub mod utils;

// Re-export core types for public API
pub use engine::{HelixEngine, EngineConfig, ConnectionState};
pub use protocol::{ProtocolType, ProtocolConfig};
pub use crypto::keymanager::KeyManager;
pub use utils::errors::{HelixError, Result};

use std::sync::Arc;

/// Version of the core library
pub const VERSION: &str = env!("CARGO_PKG_VERSION");

/// Initialize the core library with the given configuration.
/// Must be called exactly once before any other API usage.
pub fn initialize(config: EngineConfig) ->
    Result<Arc<HelixEngine>> {
    utils::logger::init_tracing(&config.log_filter);
    HelixEngine::new(config)
}
```

2.2 VPN Engine (src/engine/)

src/engine/mod.rs

```
use crate::protocol::{ProtocolDriver, ProtocolType};
use crate::tun::TunDevice;
use crate::routing::RouteManager;
use crate::firewall::Firewall;
use crate::dns::DnsResolver;
use crate::utils::errors::{HelixError, Result};
use std::sync::Arc;
use tokio::sync::{RwLock, broadcast};
use serde::{Deserialize, Serialize};

/// The central VPN engine orchestrating all subsystems.
pub struct HelixEngine {
    config: EngineConfig,
    state: RwLock<ConnectionState>,
    protocol_driver: Arc<dyn ProtocolDriver>,
    tun_device: Arc<dyn TunDevice>,
    route_manager: Arc<RouteManager>,
    firewall: Arc<dyn Firewall>,
    dns_resolver: Arc<DnsResolver>,
    event_tx: broadcast::Sender<EngineEvent>,
}

/// Configuration for the VPN engine.
#[derive(Debug, Clone, Deserialize, Serialize)]
pub struct EngineConfig {
    pub protocol: ProtocolType,
    pub server_address: String,
    pub server_port: u16,
    pub private_key: String,           // Base64-encoded WireGuard
    private_key,
    pub public_key: String,           // Server public key
    pub preshared_key: Option<String>,
    pub dns_servers: Vec<String>,
    pub mtu: u16,
    pub kill_switch: bool,
    pub split_tunnel: Option<SplitTunnelConfig>,
    pub log_filter: String,
    pub post_quantum: bool,
    pub obfuscation: Option<ObfuscationConfig>,
}

#[derive(Debug, Clone, Deserialize, Serialize)]
pub struct SplitTunnelConfig {
    pub included_apps: Vec<String>,   // Android package names
    pub excluded_apps: Vec<String>,
    pub included_routes: Vec<String>, // CIDR notation
    pub excluded_routes: Vec<String>,
}
```

```

}

#[derive(Debug, Clone, Deserialize, Serialize)]
pub struct ObfuscationConfig {
    pub method: ObfuscationMethod,
    pub settings: serde_json::Value,
}

#[derive(Debug, Clone, Deserialize, Serialize)]
pub enum ObfuscationMethod {
    Daita,
    Shadowsocks,
    Fragment,
}

/// Connection state machine states.
#[derive(Debug, Clone, Copy, PartialEq, Eq, Serialize)]
pub enum ConnectionState {
    Disconnected,
    Connecting,
    Connected,
    Disconnecting,
    Error(HelixError),
}

/// Events emitted by the engine.
#[derive(Debug, Clone, Serialize)]
pub enum EngineEvent {
    StateChanged(ConnectionState),
    StatsUpdated(ConnectionStats),
    ErrorOccurred(HelixError),
}

#[derive(Debug, Clone, Default, Serialize)]
pub struct ConnectionStats {
    pub bytes_sent: u64,
    pub bytes_received: u64,
    pub packets_sent: u64,
    pub packets_received: u64,
    pub latency_ms: u32,
    pub handshake_duration_ms: u32,
}

```

src/engine/connection.rs

```

use super::*;
use tokio::time::{timeout, Duration};

impl HelixEngine {
    /// Establish a VPN connection with the configured parameters.
    ///

```

```

/// # Lifecycle
/// 1. Validate configuration
/// 2. Apply firewall rules (kill switch) if enabled
/// 3. Resolve DNS for server endpoint
/// 4. Initialize protocol driver (handshake)
/// 5. Create TUN interface
/// 6. Configure routing
/// 7. Set DNS servers
/// 8. Start packet relay loop
pub async fn connect(&self) -> Result<()> {
    let mut state = self.state.write().await;
    *state = ConnectionState::Connecting;
    self.event_tx.send(EngineEvent::StateChanged(*state)).ok();

    // Step 1: Apply kill switch before any network activity
    if self.config.kill_switch {
        self.firewall.enable_kill_switch().await?;
    }

    // Step 2: DNS resolution
    let endpoint = self.dns_resolver
        .resolve(&self.config.server_address)
        .await?;

    // Step 3: Protocol handshake (WireGuard, etc.)
    let tunnel_params = self.protocol_driver
        .handshake(endpoint, self.config.server_port)
        .await?;

    // Step 4: Create TUN device
    let tun = self.tun_device
        .create(tunnel_params.tunnel_address,
            tunnel_params.dns_addresses)
        .await?;

    // Step 5: Configure routes
    self.route_manager
        .setup_routes(&tunnel_params.allowed_ips, endpoint)
        .await?;

    // Step 6: Start packet relay
    self.start_relay_loop(tun, tunnel_params.mtu).await?;

    *state = ConnectionState::Connected;
    self.event_tx.send(EngineEvent::StateChanged(*state)).ok();

    Ok(())
}

/// Gracefully disconnect the VPN tunnel.
pub async fn disconnect(&self) -> Result<()> {
    let mut state = self.state.write().await;

```



```

*state = ConnectionState::Disconnecting;
self.event_tx.send(EngineEvent::StateChanged(*state)).ok();

// Restore routes
self.route_manager.teardown_routes().await.ok();

// Close TUN
self.tun_device.destroy().await.ok();

// Protocol cleanup
self.protocol_driver.shutdown().await.ok();

// Remove kill switch
if self.config.kill_switch {
    self.firewall.disable_kill_switch().await.ok();
}

*state = ConnectionState::Disconnected;
self.event_tx.send(EngineEvent::StateChanged(*state)).ok();

Ok(())
}

/// Start the bidirectional packet relay loop.
async fn start_relay_loop(&self, tun: Arc<dyn TunDevice>,
    mtu: u16) -> Result<()> {
    let (tun_tx, tun_rx) =
        tokio::sync::mpsc::channel::<bytes::Bytes>(1024);
    let (net_tx, net_rx) =
        tokio::sync::mpsc::channel::<bytes::Bytes>(1024);

    // TUN -> Network (encrypt and send)
    let tun_to_net =
        tokio::spawn(self.relay_tun_to_net(tun.clone(), net_tx));

    // Network -> TUN (decrypt and inject)
    let net_to_tun = tokio::spawn(self.relay_net_to_tun(tun,
        tun_rx));

    // Spawn protocol driver I/O
    self.protocol_driver
        .start_io(tun_tx, net_rx, mtu)
        .await?;

    // Store join handles for graceful shutdown
    tokio::try_join!(tun_to_net, net_to_tun).ok();

    Ok(())
}

async fn relay_tun_to_net(
    &self,
    _tun: Arc<dyn TunDevice>,

```

```

        _net_tx: tokio::sync::mpsc::Sender<bytes::Bytes>,
    ) -> Result<()> {
        // Implementation reads from TUN, encrypts via protocol
        // driver
        todo!("TUN->Network relay")
    }

    async fn relay_net_to_tun(
        &self,
        _tun: Arc<dyn TunDevice>,
        _mut net_rx: tokio::sync::mpsc::Receiver<bytes::Bytes>,
    ) -> Result<()> {
        // Implementation receives from network, decrypts, writes
        // to TUN
        todo!("Network->TUN relay")
    }
}

```

src/engine/state_machine.rs

```

/// Connection state machine with transition validation.
///
/// Valid transitions:
/// Disconnected -> Connecting
/// Connecting -> Connected | Error
/// Connected -> Disconnecting | Error
/// Disconnecting -> Disconnected
/// Error -> Disconnected | Connecting
#[derive(Debug)]
pub struct ConnectionStateMachine {
    current: ConnectionState,
}

impl ConnectionStateMachine {
    pub fn new() -> Self {
        Self {
            current: ConnectionState::Disconnected,
        }
    }

    pub fn transition(&mut self, next: ConnectionState) ->
        Result<()> {
        let valid = match (&self.current, &next) {
            (ConnectionState::Disconnected,
             ConnectionState::Connecting) => true,
            (ConnectionState::Connecting,
             ConnectionState::Connecting,
             ConnectionState::Connected) => true,
            (ConnectionState::Connecting,
             ConnectionState::Error(_)) => true,
            (ConnectionState::Connected,
             ConnectionState::Disconnecting) => true,
            (ConnectionState::Connected,
             ConnectionState::Error(_)) => true,
        }
    }
}

```

```

        (ConnectionState::Disconnecting,
ConnectionState::Disconnected) => true,
        (ConnectionState::Error(_),
ConnectionState::Disconnected) => true,
        (ConnectionState::Error(_),
ConnectionState::Connecting) => true,
        (same, other) if std::mem::discriminant(same) ==
std::mem::discriminant(other) => true,
        _ => false,
    };

    if valid {
        self.current = next;
        Ok(())
    } else {
        Err(HelixError::StateTransition {
            from: format!("{:?}", self.current),
            to: format!("{:?}", next),
        })
    }
}
}
}

```

2.3 Protocol Implementations (src/protocol/)

src/protocol/mod.rs

```

use crate::utils::errors::Result;
use async_trait::async_trait;
use bytes::Bytes;
use serde::{Deserialize, Serialize};
use std::net::SocketAddr;
use tokio::sync::mpsc;

pub mod wireguard;
pub mod shadowsocks;
pub mod masque;

/// Trait for all protocol drivers.
#[async_trait]
pub trait ProtocolDriver: Send + Sync {
    /// Perform the cryptographic handshake.
    async fn handshake(
        &self,
        endpoint: SocketAddr,
        port: u16,
    ) -> Result<TunnelParams>;

    /// Start the I/O relay loop for this protocol.
    async fn start_io(
        &self,
    )

```

```

        tun_tx: mpsc::Sender<Bytes>,
        net_rx: mpsc::Receiver<Bytes>,
        mtu: u16,
    ) -> Result<()>;

    /// Graceful shutdown.
    async fn shutdown(&self) -> Result<()>;
}

/// Parameters returned after successful handshake.
#[derive(Debug, Clone)]
pub struct TunnelParams {
    pub tunnel_address: String,          // e.g., "10.64.0.1/32"
    pub dns_addresses: Vec<String>,      // e.g., ["10.64.0.1"]
    pub allowed_ips: Vec<String>,        // CIDR ranges to route
        through tunnel
    pub mtu: u16,
    pub endpoint: SocketAddr,
}

#[derive(Debug, Clone, Copy, PartialEq, Eq, Deserialize,
        Serialize)]
pub enum ProtocolType {
    WireGuard,
    Shadowsocks,
    Masque,
    /// RESERVED for a post-MVP2 (MVP3+) protocol addition. There
    /// is no
    /// `helix-openvpn` crate, no OpenVPN entry in the multi-
    /// protocol support
    /// table (`MVP2_OVERVIEW.md` §7.1), and the `openvpn` Cargo
    /// feature flag
    /// (§1.5) is an empty placeholder (`openvpn = []`). Selecting
    /// this
    /// variant MUST return `HelixError::UnsupportedProtocol` in
    /// MVP2 builds.
    /// Reconciled in Revision 2 – earlier drafts of `README.md`
    /// listed
    /// OpenVPN alongside WireGuard/Shadowsocks/MASQUE as if fully
    /// supported;
    /// that line has been corrected.
    OpenVPN,
}

#[derive(Debug, Clone, Deserialize, Serialize)]
pub struct ProtocolConfig {
    pub protocol: ProtocolType,
    pub server_address: String,
    pub server_port: u16,
    pub extra: serde_json::Value,
}

```

2.4 Cryptographic Primitives (src/crypto/)

```
// src/crypto/mod.rs
pub mod chacha20poly1305;
pub mod x25519;
pub mod keymanager;

#[cfg(feature = "post-quantum")]
pub mod post_quantum;

use zeroize::{Zeroize, ZeroizeOnDrop};

/// A secret key that is automatically zeroed on drop.
#[derive(Clone, Zeroize, ZeroizeOnDrop)]
pub struct SecretKey(pub Vec<u8>);

impl SecretKey {
    pub fn new(bytes: Vec<u8>) -> Self {
        Self(bytes)
    }

    pub fn as_slice(&self) -> &[u8] {
        &self.0
    }
}

// src/crypto/x25519.rs
use x25519_dalek::{EphemeralSecret, PublicKey, StaticSecret};
use rand::rngs::OsRng;
use crate::utils::errors::Result;

/// Generate a new X25519 keypair (WireGuard static key).
pub fn generate_keypair() -> (StaticSecret, PublicKey) {
    let secret = StaticSecret::random_from_rng(OsRng);
    let public = PublicKey::from(&secret);
    (secret, public)
}

/// Derive shared secret from our private key and peer's public
    key.
pub fn derive_shared_secret(
    our_secret: &StaticSecret,
    their_public: &PublicKey,
) -> [u8; 32] {
    our_secret.diffie_hellman(their_public).to_bytes()
}

// src/crypto/post_quantum.rs (ML-KEM integration)
#[cfg(feature = "post-quantum")]
use aws_lc_rs::kem;

/// Hybrid X25519 + ML-KEM-768 key encapsulation.
```

```

pub struct HybridKem {
    classic_secret: x25519_dalek::StaticSecret,
    pq_decapsulation_key:
        Option<kem::DecapsulationKey<kem::AlgorithmId<'static'>>>,
}

impl HybridKem {
    /// Generate a hybrid keypair combining classical and post-
    quantum security.
    pub fn generate_hybrid() -> Result<(Self, Vec<u8>)> {
        let (classic_secret, classic_public) =
            super::x25519::generate_keypair();

        // ML-KEM-768 encapsulation
        let kem_algorithm = kem::KYBER768_R3;
        let (decap_key, encapsulation_key_bytes) =
            kem::DecapsulationKey::generate(&kem_algorithm)?;

        // Concatenate X25519 public key + ML-KEM encapsulation
        key
        let mut hybrid_public = Vec::with_capacity(32 +
            encapsulation_key_bytes.len());
        hybrid_public.extend_from_slice(&classic_public.as_bytes());
        hybrid_public.extend_from_slice(&encapsulation_key_bytes);

        Ok((Self {
            classic_secret,
            pq_decapsulation_key: Some(decap_key),
        }, hybrid_public))
    }
}

```

2.5 TUN Interface (src/tun/)

```

// src/tun/mod.rs
use async_trait::async_trait;
use crate::utils::errors::Result;

#[cfg(target_os = "macos")]
pub mod unix;
#[cfg(target_os = "linux")]
pub mod unix;
#[cfg(target_os = "windows")]
pub mod windows;
#[cfg(target_os = "android")]
pub mod android;
#[cfg(target_os = "ios")]
pub mod ios;

/// Abstract TUN device interface.
#[async_trait]
pub trait TunDevice: Send + Sync {

```

```

/// Create the TUN device with the given IP configuration.
async fn create(&self, address: String, dns: Vec<String>) ->
    Result<Arc<dyn TunDevice>>;

/// Destroy the TUN device.
async fn destroy(&self) -> Result<()>;

/// Read a packet from the TUN device (non-blocking async).
async fn read_packet(&self, buf: &mut [u8]) -> Result<usize>;

/// Write a packet to the TUN device.
async fn write_packet(&self, packet: &[u8]) -> Result<()>;

/// Set the MTU.
fn set_mtu(&self, mtu: u16) -> Result<()>;

/// Get the file descriptor (Unix platforms).
#[cfg(unix)]
fn fd(&self) -> std::os::fd::RawFd;
}

/// Factory for creating platform-specific TUN devices.
pub fn create_tun_device() -> Result<Arc<dyn TunDevice>> {
    #[cfg(any(target_os = "macos", target_os = "linux"))]
    return Ok(Arc::new(unix::UnixTun::new()));

    #[cfg(target_os = "windows")]
    return Ok(Arc::new(windows::WinTunDevice::new()));

    #[cfg(target_os = "android")]
    return Ok(Arc::new(android::AndroidTun::new()));

    #[cfg(target_os = "ios")]
    return Ok(Arc::new(ios::IosTun::new()));
}

```

2.6 Firewall / Kill Switch (src/firewall/)

```

// src/firewall/mod.rs
use async_trait::async_trait;
use crate::utils::errors::Result;

#[cfg(target_os = "macos")]
pub mod pf;
#[cfg(target_os = "linux")]
pub mod iptables;
#[cfg(target_os = "windows")]
pub mod wfp;
#[cfg(target_os = "android")]
pub mod android;

```

```
#[async_trait]
pub trait Firewall: Send + Sync {
    /// Enable kill switch: block all outbound traffic except VPN tunnel.
    async fn enable_kill_switch(&self) -> Result<()>;

    /// Disable kill switch: restore normal traffic flow.
    async fn disable_kill_switch(&self) -> Result<()>;

    /// Add exception for the VPN server endpoint.
    async fn allow_endpoint(&self, address: std::net::SocketAddr)
        -> Result<()>;

    /// Block all IPv6 traffic to prevent IPv6 leaks.
    async fn block_ipv6(&self) -> Result<()>;

    /// Enforce DNS through VPN tunnel only.
    async fn enforce_dns(&self, dns_servers: &[String]) ->
        Result<()>;
}
```

2.7 DNS Management (src/dns/)

```
/// src/dns/mod.rs
pub mod resolver;
pub mod doh;
pub mod dot;

use crate::utils::errors::Result;
use std::net::SocketAddr;

/// DNS resolver supporting plaintext, DoT, and DoH.
pub struct DnsResolver {
    method: DnsMethod,
    servers: Vec<SocketAddr>,
}

#[derive(Debug, Clone, Copy, PartialEq, Eq)]
pub enum DnsMethod {
    Plaintext,    // UDP/53
    DoT,          // DNS-over-TLS
    DoH,          // DNS-over-HTTPS
    DoH3,         // DNS-over-HTTP/3 (QUIC)
}

impl DnsResolver {
    /// Resolve a hostname to IP addresses.
    pub async fn resolve(&self, hostname: &str) ->
        Result<SocketAddr> {
        match self.method {
```



```

        DnsMethod::Plaintext =>
            resolver::resolve_plaintext(hostname,
            &self.servers).await,
        DnsMethod::DoT => dot::resolve_dot(hostname,
            &self.servers).await,
        DnsMethod::DoH => doh::resolve_doh(hostname,
            &self.servers).await,
        DnsMethod::DoH3 => doh::resolve_doh3(hostname,
            &self.servers).await,
    }
}
}

```

2.8 Obfuscation (src/obfuscation/)

```

// src/obfuscation/mod.rs
pub mod daita;
pub mod fragment;

use async_trait::async_trait;
use bytes::Bytes;
use crate::utils::errors::Result;

/// Trait for traffic obfuscation layers.
#[async_trait]
pub trait ObfuscationLayer: Send + Sync {
    /// Obfuscate outgoing packet data.
    async fn obfuscate(&self, packet: Bytes) -> Result<Bytes>;

    /// Deobfuscate incoming packet data.
    async fn deobfuscate(&self, data: Bytes) -> Result<Bytes>;

    /// Get the overhead bytes added per packet.
    fn overhead(&self) -> usize;
}

```

2.9 Platform Abstraction (src/platform/)

```

// src/platform/mod.rs
pub mod ffi;

#[cfg(feature = "uniffi")]
pub mod uniffi;

#[cfg(feature = "wasm")]
pub mod wasm;

/// Platform-specific key storage (Keychain, Keystore, etc.)
pub trait SecureStorage: Send + Sync {
    fn store_key(&self, key_id: &str, key_data: &[u8]) ->
        Result<()>;
}

```

```
fn retrieve_key(&self, key_id: &str) -> Result<Vec<u8>>;
fn delete_key(&self, key_id: &str) -> Result<()>;
}
```

3. Public API Design

3.1 Core API Traits and Structs

```
// src/engine/api.rs

use serde::{Deserialize, Serialize};
use std::sync::Arc;
use tokio::sync::broadcast;

/// Primary public API for all platform integrations.
///
/// This is the single entry point that all platform bindings
/// (UniFFI,
/// flutter_rust_bridge, wasm-bindgen, C FFI) call into.
pub struct HelixVpnApi {
    engine: Arc<HelixEngine>,
}

impl HelixVpnApi {
    /// Create a new API instance with the given configuration.
    pub fn new(config: VpnConfig) -> Result<Self, HelixError> {
        let engine_config = config.into_engine_config()?;
        let engine = crate::initialize(engine_config)?;
        Ok(Self { engine })
    }

    /// Connect to the VPN.
    pub async fn connect(&self) -> Result<ConnectionStatus,
        HelixError> {
        self.engine.connect().await?;
        Ok(ConnectionStatus::Connected)
    }

    /// Disconnect from the VPN.
    pub async fn disconnect(&self) -> Result<ConnectionStatus,
        HelixError> {
        self.engine.disconnect().await?;
        Ok(ConnectionStatus::Disconnected)
    }

    /// Get current connection status.
    pub fn status(&self) -> ConnectionStatus {
        match *self.engine.state.try_read() {
            Ok(state) => state.into(),
        }
    }
}
```

```

        Err(_) => ConnectionStatus::Unknown,
    }
}

/// Subscribe to engine events.
pub fn subscribe_events(&self) ->
    broadcast::Receiver<EngineEvent> {
    self.engine.event_tx.subscribe()
}

/// Get current connection statistics.
pub fn stats(&self) -> ConnectionStats {
    // Returns last known stats
    ConnectionStats::default()
}

}

/// Serializable VPN configuration (platform-agnostic).
#[derive(Debug, Clone, Deserialize, Serialize)]
pub struct VpnConfig {
    pub protocol: String,           // "wireguard",
                                   "shadowsocks", "masque"
    pub server_host: String,
    pub server_port: u16,
    pub private_key_b64: String,
    pub server_public_key_b64: String,
    pub preshared_key_b64: Option<String>,
    pub dns_servers: Vec<String>,
    pub mtu: Option<u16>,
    pub kill_switch_enabled: bool,
    pub split_tunnel_enabled: bool,
    pub split_tunnel_apps: Vec<String>,
    pub obfuscation: Option<String>, // "daita", "shadowsocks",
                                   "fragment"
    pub post_quantum: bool,
    pub log_level: String,          // "trace", "debug", "info",
                                   "warn", "error"
}

/// Wire-format connection status surfaced to every platform
binding.

///
/// **Revision 2 fix**: this enum previously modeled only six
coarse states
/// and collapsed "reconnecting after a keepalive timeout" and
"kill switch
/// actively blocking traffic" into a generic `Error`/
`Disconnecting` state –
/// a real UX gap, since a user cannot distinguish "temporarily
blocked while
/// the tunnel silently re-establishes" from "something is broken"
without a
/// dedicated state. This enum is now the literal wire
representation of the

```

```

/// canonical state machine in `MVP2_ARCHITECTURE.md` §5.6 – every
    platform
/// UI's connection-state rendering (§UI_UX_SPEC "State
    Transitions") MUST
/// switch over exactly this set, with no platform-invented
    additional state.
#[derive(Debug, Clone, Copy, PartialEq, Eq, Serialize)]
pub enum ConnectionStatus {
    Disconnected,
    Connecting,
    Connected,
    /// Handshake or keepalive lost; attempting to re-establish.
    Distinct
    /// from `Connecting` (first connection) for UI messaging
    purposes.
    Reconnecting,
    /// Reconnect exceeded the grace period AND kill switch is
    enabled: all
    /// non-VPN traffic is being actively blocked at the platform
    firewall
    /// layer (see `MVP2_SECURITY_PERFORMANCE.md` §2).
    KillSwitchActive,
    Disconnecting,
    /// Initial connection attempt failed (timeout / handshake
    error), prior
    /// to ever reaching `Connected`. Distinct from
    `Reconnecting`, which
    /// implies a prior successful connection.
    ConnectionFailed,
    Error,
    Unknown,
}

/// Enterprise-managed policy pushed from the `helix-admin`
    control plane
/// (`MVP2_ARCHITECTURE.md` §10.2) via the MVP1 Admin API.
    Consumed by
/// `PlatformAdapter::apply_managed_policy`
    (`MVP2_ARCHITECTURE.md` §5.5).
/// A `None`/absent policy means the device is not MDM-enrolled
    and all
/// settings remain fully user-controlled.
#[derive(Debug, Clone, Deserialize, Serialize)]
pub struct ManagedPolicy {
    pub organization_id: String,
    pub allowed_protocols: Vec<ProtocolType>,
    pub force_kill_switch: bool,
    pub force_split_tunnel_rules: Option<SplitTunnelConfig>,
    pub forced_dns_servers: Vec<String>,
    pub require_sso_login: bool,
    /// Monotonically increasing version so a device can detect
    and log a
    /// stale/rolled-back policy push instead of silently
    reapplying it.
}

```


```

pub policy_version: u64,
}

```

ConnectionStatus state machine (diagram)

The diagram below is the literal state machine the ConnectionStatus enum above encodes — the same FSM every platform UI renders (MVP2_ARCHITECTURE.md §5.6; MVP2_DESKTOP_APPS.md §5.4; MVP2_MOBILE_APPS.md §2.2). It adds no transition not already described by the enum's own doc comments.

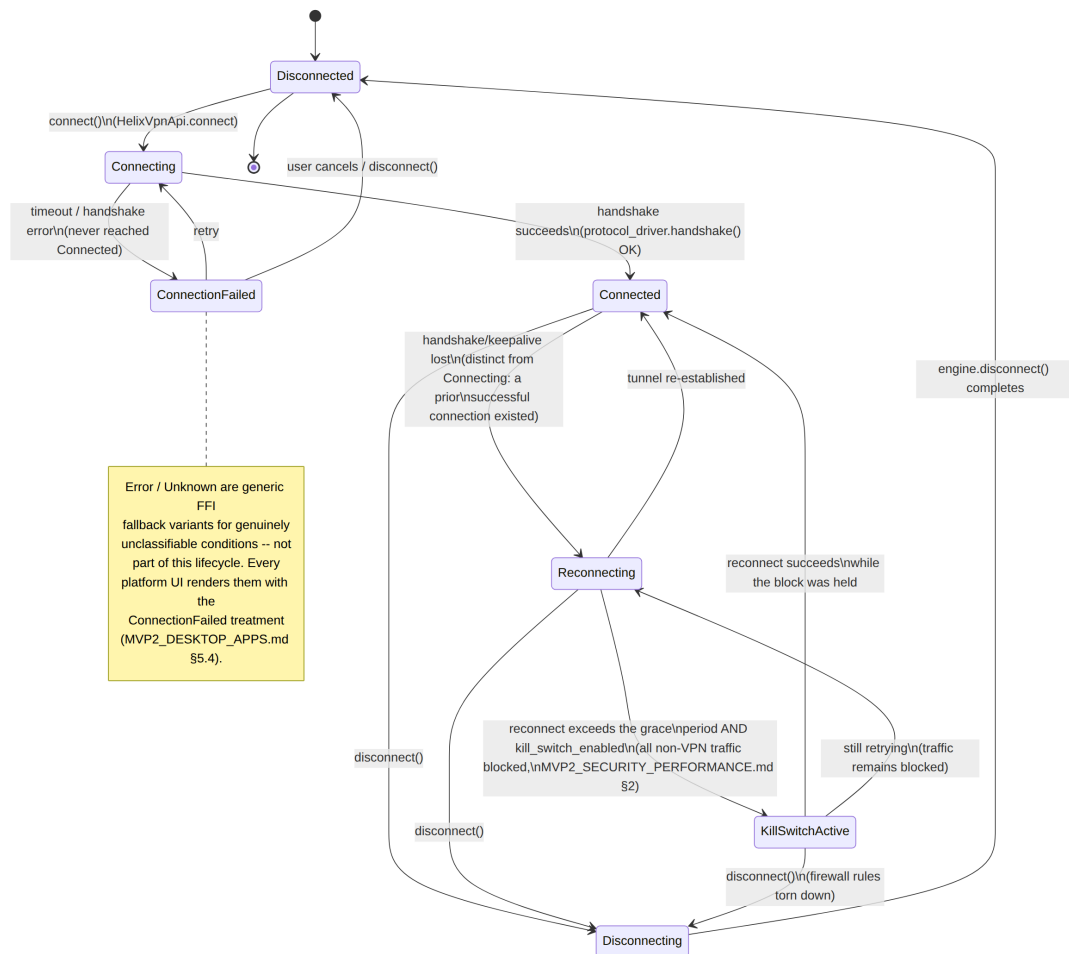

3.2 FFI Boundary Definitions (C ABI)

```
// src/platform/ffi.rs
```

```

use std::ffi::{c_char, c_int, CStr, CString};
use std::sync::Arc;
use once_cell::sync::Lazy;
use tokio::runtime::Runtime;

```

```

/// Static Tokio runtime for all FFI operations.
static RUNTIME: Lazy<Runtime> = Lazy::new(|| {
    Runtime::new_multi_thread()

```

```

        .worker_threads(4)
        .max_blocking_threads(8)
        .enable_all()
        .thread_name("helix-ffi")
        .build()
        .expect("Failed to create Tokio runtime")
    });

thread_local! {
    static LAST_ERROR: std::cell::RefCell<Option<String>> =
        std::cell::RefCell::new(None);
}

/// Opaque handle to the Helix VPN engine.
pub struct HelixHandle {
    engine: Arc<super::HelixEngine>,
}

/// Initialize the VPN core with a JSON configuration string.
///
/// # Safety
/// `config_json` must be a valid null-terminated UTF-8 string.
/// The returned handle must be freed with `helix_free`.
#[no_mangle]
pub unsafe extern "C" fn helix_init(config_json: *const c_char)
    -> *mut HelixHandle {
    catch_panic(|| {
        let config_str =
            CString::from_ptr(config_json).to_string_lossy();
        let config: VpnConfig = serde_json::from_str(&config_str)
            .map_err(|e| HelixError::ConfigParse(e.to_string()))?;
        let engine_config = config.into_engine_config()?;
        let engine = crate::initialize(engine_config)?;
        Ok(Box::into_raw(Box::new(HelixHandle { engine })))
    })
    .unwrap_or(std::ptr::null_mut())
}

/// Connect to the VPN server.
///
/// # Returns
/// 0 on success, non-zero error code on failure.
#[no_mangle]
pub unsafe extern "C" fn helix_connect(handle: *mut HelixHandle)
    -> c_int {
    if handle.is_null() {
        set_last_error("Null handle");
        return -1;
    }

    catch_panic(|| {
        let handle = &*handle;

```

```

        RUNTIME.block_on(handle.engine.connect())?;
        Ok(0)
    })
    .unwrap_or(-1)
}

/// Disconnect from the VPN server.
#[no_mangle]
pub unsafe extern "C" fn helix_disconnect(handle: *mut
    HelixHandle) -> c_int {
    if handle.is_null() {
        return -1;
    }

    catch_panic(|| {
        let handle = &*handle;
        RUNTIME.block_on(handle.engine.disconnect())?;
        Ok(0)
    })
    .unwrap_or(-1)
}

/// Get the current connection state as a string.
///
/// # Safety
/// The returned string must be freed with `helix_free_string`.
#[no_mangle]
pub unsafe extern "C" fn helix_get_state(handle: *mut
    HelixHandle) -> *mut c_char {
    if handle.is_null() {
        return std::ptr::null_mut();
    }

    let handle = &*handle;
    let state = handle.engine.status();
    let state_str = format!("{:?}", state);
    CString::new(state_str).map(|s|
        s.into_raw()).unwrap_or(std::ptr::null_mut())
}

/// Free a string returned by the FFI API.
#[no_mangle]
pub unsafe extern "C" fn helix_free_string(s: *mut c_char) {
    if !s.is_null() {
        let _ = CString::from_raw(s);
    }
}

/// Free a Helix handle.
#[no_mangle]
pub unsafe extern "C" fn helix_free(handle: *mut HelixHandle) {
    if !handle.is_null() {

```

```

        let _ = Box::from_raw(handle);
    }
}

/// Get the last error message.
///
/// # Safety
/// The returned string must be freed with `helix_free_string`.
#[no_mangle]
pub extern "C" fn helix_last_error() -> *mut c_char {
    LAST_ERROR.with(|e| {
        e.borrow()
            .as_ref()
            .and_then(|s| CString::new(s.as_str()).ok())
            .map(|s| s.into_raw())
            .unwrap_or(std::ptr::null_mut())
    })
}

fn set_last_error(msg: &str) {
    LAST_ERROR.with(|e| {
        *e.borrow_mut() = Some(msg.to_string());
    });
}

fn catch_panic<T, F>(f: F) -> Result<T, i32>
where
    F: FnOnce() -> Result<T, HelixError> + std::panic::UnwindSafe,
{
    match std::panic::catch_unwind(f) {
        Ok(Ok(val)) => Ok(val),
        Ok(Err(e)) => {
            set_last_error(&e.to_string());
            Err(-1)
        }
        Err(_) => {
            set_last_error("Panic in Rust code");
            Err(-2)
        }
    }
}

```

3.3 UniFFI Interface Definitions

```

// src/platform/uniffi.rs

use uniffi;
use crate::engine::api::{VpnConfig, ConnectionStatus,
    ConnectionStats};

#[derive(uniffi::Object)]

```



```

pub struct HelixVpnCore {
    api: crate::engine::api::HelixVpnApi,
}

#[uniffi::export]
impl HelixVpnCore {
    #[uniffi::constructor]
    pub fn new(config: VpnConfigUniffi) -> Result<Self,
        HelixError> {
        let api =
            crate::engine::api::HelixVpnApi::new(config.into())?;
        Ok(Self { api })
    }

    pub fn connect(&self) -> Result<ConnectionStatusUniffi,
        HelixError> {
        let rt = tokio::runtime::Handle::try_current()
            .or_else(|_| Ok(RUNTIME.handle().clone()))?;
        rt.block_on(self.api.connect())
            .map(|s| s.into())
    }

    pub fn disconnect(&self) -> Result<ConnectionStatusUniffi,
        HelixError> {
        let rt = tokio::runtime::Handle::try_current()
            .or_else(|_| Ok(RUNTIME.handle().clone()))?;
        rt.block_on(self.api.disconnect())
            .map(|s| s.into())
    }

    pub fn status(&self) -> ConnectionStatusUniffi {
        self.api.status().into()
    }

    pub fn stats(&self) -> ConnectionStatsUniffi {
        self.api.stats().into()
    }
}

// UniFFI-compatible config struct
#[derive(uniffi::Record)]
pub struct VpnConfigUniffi {
    pub protocol: String,
    pub server_host: String,
    pub server_port: u16,
    pub private_key_b64: String,
    pub server_public_key_b64: String,
    pub dns_servers: Vec<String>,
    pub kill_switch_enabled: bool,
}

#[derive(uniffi::Enum)]

```

```

pub enum ConnectionStatusUniffi {
    Disconnected,
    Connecting,
    Connected,
    Disconnecting,
    Error,
}

#[derive(uniffi::Record)]
pub struct ConnectionStatsUniffi {
    pub bytes_sent: u64,
    pub bytes_received: u64,
    pub latency_ms: u32,
}

```

3.4 UDL Definition File

```

// helix_core.udl
namespace helix_core {
    string version();
};

[Error]
enum HelixError {
    "ConfigParse",
    "ConnectionFailed",
    "AuthenticationFailed",
    "Timeout",
    "StateTransition",
    "CryptoError",
    "PlatformError",
    "NetworkError",
};

dictionary VpnConfig {
    string protocol;
    string server_host;
    u16 server_port;
    string private_key_b64;
    string server_public_key_b64;
    sequence<string> dns_servers;
    boolean kill_switch_enabled;
};

enum ConnectionStatus {
    "Disconnected",
    "Connecting",
    "Connected",
    "Disconnecting",
    "Error",
};

```

```

dictionary ConnectionState {
    u64 bytes_sent;
    u64 bytes_received;
    u32 latency_ms;
};

interface HelixVpnCore {
    [Name=constructor, Throws=HelixError]
    constructor(VpnConfig config);

    [Throws=HelixError]
    ConnectionStatus connect();

    [Throws=HelixError]
    ConnectionStatus disconnect();

    ConnectionStatus status();

    ConnectionState stats();
};

```

3.5 Tauri Command API

```
// src/platform/tauri.rs
```

```

use tauri::State;
use std::sync::Arc;
use tokio::sync::Mutex;

pub struct AppState {
    pub api: Arc<Mutex<crate::engine::api::HelixVpnApi>>,
}

#[tauri::command]
pub async fn vpn_connect(
    state: State<'_, AppState>,
    config: crate::engine::api::VpnConfig,
) -> Result<String, String> {
    let api = state.api.lock().await;
    match api.connect().await {
        Ok(status) => Ok(format!("{:?}", status)),
        Err(e) => Err(e.to_string()),
    }
}

#[tauri::command]
pub async fn vpn_disconnect(
    state: State<'_, AppState>,
) -> Result<String, String> {
    let api = state.api.lock().await;

```

```

        match api.disconnect().await {
            Ok(status) => Ok(format!("{:?}", status)),
            Err(e) => Err(e.to_string()),
        }
    }

#[tauri::command]
pub async fn vpn_status(
    state: State<'_, AppState>,
) -> Result<String, String> {
    let api = state.api.lock().await;
    Ok(format!("{:?}", api.status()))
}

#[tauri::command]
pub async fn vpn_stats(
    state: State<'_, AppState>,
) -> Result<crate::engine::api::ConnectionStats, String> {
    let api = state.api.lock().await;
    Ok(api.stats())
}

```

3.6 Flutter Platform Channel API

```

// src/platform/flutter.rs

/// flutter_rust_bridge integration.
/// This module is only compiled when the `flutter` feature is
/// enabled.

use flutter_rust_bridge::frb;

#[frb(init)]
pub fn init_app() {
    // Default flutter_rust_bridge initialization
}

#[frb(sync)]
pub fn helix_version() -> String {
    crate::VERSION.to_string()
}

#[frb]
pub async fn helix_connect(config_json: String) -> Result<String,
String> {
    let config: crate::engine::api::VpnConfig =
        serde_json::from_str(&config_json).map_err(|e|
            e.to_string())?;

    let api = crate::engine::api::HelixVpnApi::new(config)
        .map_err(|e| e.to_string())?;
}

```

```

        api.connect().await
            .map(|s| format!("{:?}", s))
            .map_err(|e| e.to_string())
    }

#[frb]
pub async fn helix_disconnect() -> Result<String, String> {
    // Requires shared state management
    Ok("Disconnected".to_string())
}

#[frb]
pub fn helix_get_status() -> String {
    // Requires shared state management
    "Unknown".to_string()
}

```

4. Protocol Implementation Details

4.1 WireGuard via BoringTun

Architecture

```

+-----+
|                               WireGuard Protocol Driver                               |
+-----+
| boringtun::noise::Tunn (per-peer tunnel state)                                     |
| + Noise Protocol handshake (IK pattern)                                           |
| + ChaCha20-Poly1305 packet encryption                                             |
| + Blake2s keyed hashing                                                            |
| + Timers (keepalive, rekey, handshake retry)                                     |
+-----+
| UDP Socket (tokio::net::UdpSocket)                                                |
| + Async send/receive                                                              |
| + Zero-copy buffer management (bytes crate)                                       |
+-----+

```

Implementation (src/protocol/wireguard/)

```

// src/protocol/wireguard/mod.rs

use boringtun::noise::{Tunn, TunnResult};
use boringtun::noise::rate_limiter::RateLimiter;
use boringtun::x25519::{PublicKey, StaticSecret};
use bytes::{Bytes, BytesMut};
use std::net::SocketAddr;
use std::sync::Arc;
use tokio::net::UdpSocket;

```

```

use tokio::sync::mpsc;
use tokio::time::{interval, Duration};

pub mod handshake;
pub mod crypto;
pub mod transport;

const KEEPALIVE_INTERVAL: Duration = Duration::from_secs(25);
const HANDSHAKE_RETRY_INTERVAL: Duration = Duration::from_secs(5);
const MAX_HANDSHAKE_RETRIES: u32 = 5;

/// WireGuard protocol driver using boringtun.
pub struct WireGuardDriver {
    tunnel: Arc<parking_lot::Mutex<Tunn>>,
    socket: Arc<UdpSocket>,
    endpoint: std::sync::RwLock<Option<SocketAddr>>,
    stats: std::sync::atomic::AtomicU64,
}

impl WireGuardDriver {
    pub fn new(
        static_private: StaticSecret,
        peer_public: PublicKey,
        preshared_key: Option<[u8; 32]>,
    ) -> Result<Self, crate::utils::errors::HelixError> {
        let tunnel = Tunn::new(
            static_private,
            peer_public,
            preshared_key,
            Some(RateLimiter::new(&StaticSecret::default(),
                1000)),
            0,
            None,
        ).map_err(|e|
            crate::utils::errors::HelixError::CryptoError(e.to_string()))?;

        Ok(Self {
            tunnel: Arc::new(parking_lot::Mutex::new(tunnel)),
            socket: Arc::new(UdpSocket::bind("0.0.0.0:0").await?),
            endpoint: std::sync::RwLock::new(None),
            stats: std::sync::atomic::AtomicU64::new(0),
        })
    }
}

#[async_trait::async_trait]
impl crate::protocol::ProtocolDriver for WireGuardDriver {
    async fn handshake(
        &self,
        endpoint: SocketAddr,
        _port: u16,
    )

```

```

) -> Result<crate::protocol::TunnelParams,
    crate::utils::errors::HelixError> {
    *self.endpoint.write().unwrap() = Some(endpoint);

    // Initiate WireGuard handshake
    let mut buf = vec![0u8; 256];
    let packet = {
        let mut tun = self.tunnel.lock();
        match tun.format_handshake_initiation(&mut buf,
            false) {
            TunnResult::WriteToNetwork(packet) =>
                packet.to_vec(),
            TunnResult::WriteToTunnelV4(_, _) => unreachable!(),
            TunnResult::WriteToTunnelV6(_, _) => unreachable!(),
            TunnResult::Done => return
                Err(crate::utils::errors::HelixError::ConnectionFailed(
                    "Handshake already complete or not
                    needed".into()
                )),
            TunnResult::Err(e) => return
                Err(crate::utils::errors::HelixError::CryptoError(
                    e.to_string()
                )),
        }
    };

    // Send handshake initiation
    self.socket.send_to(&packet, endpoint).await?;

    // Wait for handshake response with retry logic
    let mut attempts = 0;
    let mut response_buf = vec![0u8; 256];

    while attempts < MAX_HANDSHAKE_RETRIES {
        match tokio::time::timeout(
            HANDSHAKE_RETRY_INTERVAL,
            self.socket.recv_from(&mut response_buf)
        ).await {
            Ok((len, src)) if src == endpoint => {
                let mut dst = vec![0u8; 1500];
                let mut tun = self.tunnel.lock();
                match tun.decapsulate(None,
                    &response_buf[..len], &mut dst) {
                    TunnResult::WriteToNetwork(reply) => {
                        // May need to send a reply (cookie
                        response, etc.)
                        self.socket.send_to(reply,
                            endpoint).await.ok();
                    }
                    TunnResult::Done => {
                        // Handshake complete
                        break;
                    }
                }
            }
            _ => {
                attempts += 1;
            }
        }
    }
}

```

```

        }
        TunnResult::Err(e) => {
            return
Err(crate::utils::errors::HelixError::CryptoError(
                e.to_string()
            ));
        }
        _ => {}
    }
}
_ => {
    // Timeout or error - retry
    attempts += 1;
    let mut buf = vec![0u8; 256];
    let packet = {
        let mut tun = self.tunnel.lock();
        match
tun.format_handshake_initiation(&mut buf, false) {
            TunnResult::WriteToNetwork(packet) =>
packet.to_vec(),
            _ => continue,
        }
    };
    self.socket.send_to(&packet, endpoint).await?;
}
}

if attempts >= MAX_HANDSHAKE_RETRIES {
    return Err(crate::utils::errors::HelixError::Timeout);
}

Ok(crate::protocol::TunnelParams {
    tunnel_address: "10.64.0.1/32".to_string(), //
Assigned by server
    dns_addresses: vec!["10.64.0.1".to_string()],
    allowed_ips: vec!["0.0.0.0/0".to_string(), "::/
0".to_string()],
    mtu: 1420,
    endpoint,
})
}

async fn start_io(
    &self,
    tun_tx: mpsc::Sender<Bytes>,
    mut net_rx: mpsc::Receiver<Bytes>,
    _mtu: u16,
) -> Result<(), crate::utils::errors::HelixError> {
    let tunnel = self.tunnel.clone();
    let socket = self.socket.clone();
    let endpoint = *self.endpoint.read().unwrap();

```



```

// Keepalive timer
let keepalive = tokio::spawn(async move {
    let mut interval = interval(KEEPALIVE_INTERVAL);
    loop {
        interval.tick().await;
        let mut buf = vec![0u8; 32]; // Keepalive is small
        let mut tun = tunnel.lock();
        match tun.format_timers(&mut buf) {
            TunnResult::WriteToNetwork(packet) => {
                if let Some(ep) = endpoint {
                    socket.send_to(packet, ep).await.ok();
                }
            }
            _ => {}
        }
    }
});

// Network receive loop
let net_recv = tokio::spawn(async move {
    let mut buf = vec![0u8; 65536];
    loop {
        match socket.recv_from(&mut buf).await {
            Ok((len, _src)) => {
                let mut dst =
BytesMut::with_capacity(65536);
                let mut tun = tunnel.lock();
                match tun.decapsulate(None, &buf[..len],
&mut dst) {
                    TunnResult::WriteToTunnelV4(packet,
_addr) |
                    TunnResult::WriteToTunnelV6(packet,
_addr) => {
                        tun_tx.send(Bytes::copy_from_slice(packet)).await.ok();
                    }
                    TunnResult::WriteToNetwork(reply) => {
                        if let Some(ep) = endpoint {
                            socket.send_to(reply,
ep).await.ok();
                        }
                    }
                    _ => {}
                }
            }
            Err(_) => break,
        }
    }
});

tokio::try_join!(keepalive, net_recv).ok();
Ok(())
}

```

```

    async fn shutdown(&self) -> Result<(),
        crate::utils::errors::HelixError> {
        *self.endpoint.write().unwrap() = None;
        Ok(())
    }
}

```

WireGuard Keepalive Timer Configuration

Parameter	Value	Description
Persistent keepalive	25s	Default interval for NAT hole punching
Rekey after time	120s	Maximum time before initiating rekey
Rekey after messages	2 ⁶⁴	Message count threshold (practically infinite)
Rekey attempt time	90s	Retry rekey if no response
Rekey timeout	5s	Retry interval for rekey attempts

4.2 Shadowsocks (SIP022 AEAD-2022)

```

// src/protocol/shadowsocks/mod.rs

/// Shadowsocks protocol driver using SIP022 AEAD-2022 ciphers.
///
/// SIP022 provides:
/// - Full replay protection (mandatory, using 64-bit unique
///   session IDs)
/// - Session-based UDP proxying
/// - Session subkey derivation with BLAKE3
/// - TCP: length-chunk-payload-chunk model
/// - UDP: separate header encryption + AEAD body

use shadowsocks_crypto::v1::Cipher;
use bytes::{Bytes, BytesMut};

pub const METHOD_AES_256_GCM: &str = "aes-256-gcm";
pub const METHOD_CHACHA20_POLY1305: &str = "chacha20-ietf-
    poly1305";
pub const METHOD_2022_BLAKE3_AES_256_GCM: &str = "2022-blake3-
    aes-256-gcm";
pub const METHOD_2022_BLAKE3_CHACHA20_POLY1305: &str = "2022-
    blake3-chacha20-poly1305";

pub struct ShadowsocksDriver {
    method: String,
    key: [u8; 32],          // Master key derived from password
}

```

```

        server_addr: std::net::SocketAddr,
    }

    impl ShadowsocksDriver {
        /// Derive session subkey using BLAKE3 (SIP022).
        fn derive_session_subkey(&self, salt: &[u8]) -> Vec<u8> {
            use blake3::Hasher;
            let mut hasher = Hasher::new_keyed(&self.key.into());
            hasher.update(salt);
            hasher.finalize().as_bytes().to_vec()
        }
    }
}

```

4.3 MASQUE/QUIC (RFC 9298)

```

// src/protocol/masque/mod.rs

/// MASQUE (Multiplexed Application Substrate over QUIC
    Encryption) driver.
///
/// RFC 9298: CONNECT-UDP proxying over HTTP/3
/// RFC 9297: HTTP Datagrams for Datagram Extensibility
/// RFC 9484: CONNECT-IP for IP packet proxying
///
/// Uses quinn for QUIC transport and h3 for HTTP/3.

use quinn::{ClientConfig, Endpoint};
use h3::{client, quic};
use rustls::ClientConfig as TlsConfig;
use bytes::Bytes;

pub struct MasqueDriver {
    endpoint: Endpoint,
    connect_url: String,
    tls_config: Arc<TlsConfig>,
}

impl MasqueDriver {
    pub async fn connect_udp_tunnel(
        &self,
        target: std::net::SocketAddr,
    ) -> Result<MasqueUdpTunnel,
        crate::utils::errors::HelixError> {
        /// RFC 9298: Send CONNECT-UDP request
        /// Template: ".well-known/masque/udp/{target_host}/{target_port}/"
        let path = format!(
            ".well-known/masque/udp/{}/{}/",
            target.ip(),
            target.port()
        );
    }
}

```

```

// Establish HTTP/3 connection with QUIC
let connection = self.endpoint
    .connect(self.connect_url.parse()?, "masque.server")?
    .await?;

// Send Extended CONNECT for UDP proxying
let (mut request_stream, udp_capsule_stream) =
h3::client::send_extended_connect(
    &connection,
    "connect-udp",
    &path,
).await?;

// Wait for 2xx response
let response = request_stream.recv_response().await?;
if !response.status().is_success() {
    return
    Err(crate::utils::errors::HelixError::ConnectionFailed(
        format!("MASQUE CONNECT-UDP failed: {}"),
        response.status()
    ));
}

Ok(MasqueUdpTunnel {
    capsule_stream: udp_capsule_stream,
    target,
})
}

}

/// A MASQUE UDP tunnel for proxying WireGuard packets.
pub struct MasqueUdpTunnel {
    capsule_stream: h3::client::UdpCapsuleStream,
    target: std::net::SocketAddr,
}

```

4.4 Multi-Hop Chaining Protocol

```

// src/protocol/multihop.rs

/// Multi-hop VPN chaining for entry-exit separation.
///
/// Architecture:
/// Client -> Entry Node (WireGuard) -> Exit Node (WireGuard) ->
/// Internet
///
/// Each hop is a separate WireGuard tunnel. The client creates:
/// 1. Tunnel to entry node (outer tunnel, visible to ISP)
/// 2. Tunnel to exit node (inner tunnel, encapsulated within
/// outer)
///
/// Entry node sees client IP but not destination.

```

```

/// Exit node sees destination but not client IP.

pub struct MultiHopChain {
    entry_tunnel: Arc<wireguard::WireGuardDriver>,
    exit_tunnel: Arc<wireguard::WireGuardDriver>,
    entry_endpoint: SocketAddr,
    exit_endpoint: SocketAddr,
}

impl MultiHopChain {
    /// Route traffic through the multi-hop chain.
    ///
    /// Packet flow:
    /// App -> TUN -> encrypt(exit) -> encrypt(entry) -> UDP ->
    ///   Entry Node
    ///   -> decrypt(entry) -> encrypt(exit) -> UDP -> Exit Node
    ///   -> decrypt(exit) -> Internet
    pub async fn relay_packet(&self, packet: Bytes) ->
        Result<Bytes> {
        // First encrypt for exit node
        let mut buf = vec![0u8; packet.len() + 64]; // overhead
        for inner WG
        let inner_encrypted = {
            let mut tun = self.exit_tunnel.tunnel.lock();
            match tun.encapsulate(&packet, &mut buf) {
                TunnelResult::WriteToNetwork(data) =>
                Bytes::copy_from_slice(data),
                other => return Err(HelixError::ConnectionFailed(
                    format!("Exit tunnel encapsulate failed:
{:?})", other)
                )),
            }
        };

        // Then encrypt for entry node (outer tunnel)
        let mut buf2 = vec![0u8; inner_encrypted.len() + 64]; //
        overhead for outer WG
        let outer_encrypted = {
            let mut tun = self.entry_tunnel.tunnel.lock();
            match tun.encapsulate(&inner_encrypted, &mut buf2) {
                TunnelResult::WriteToNetwork(data) =>
                Bytes::copy_from_slice(data),
                other => return Err(HelixError::ConnectionFailed(
                    format!("Entry tunnel encapsulate failed:
{:?})", other)
                )),
            }
        };

        Ok(outer_encrypted)
    }
}

```

5. Cross-Compilation Configuration

5.1 Supported Targets Table

Platform	Target Triple	Rust Tier	Min OS Version (product-supported)	Build Tool	Notes
macOS Intel	x86_64-apple-darwin	Tier 2	macOS 12+	cargo	Universal binary with arm64
macOS Apple Silicon	aarch64-apple-darwin	Tier 2	macOS 12+	cargo	Universal binary with x86_64
iOS Device	aarch64-apple-ios	Tier 2	iOS 15+	cargo	XCFramework
iOS Simulator	aarch64-apple-ios-sim	Tier 2	iOS 15+	cargo	Apple Silicon sim
Windows x64	x86_64-pc-windows-msvc	Tier 1	Windows 10+	cargo	MSVC toolchain
Windows ARM64	aarch64-pc-windows-msvc	Tier 2	Windows 11+	cargo	Cross-compiled
Linux x64	x86_64-unknown-linux-gnu	Tier 1	Ubuntu 22.04+ / Fedora 39+ (kernel 5.4+)	cargo/cross	glibc target
Linux ARM64	aarch64-unknown-linux-gnu	Tier 1	Ubuntu 22.04+ / Fedora 39+ (kernel 5.4+)	cross	Server/embedded
Android ARM64	aarch64-linux-android	Tier 2	API 26+ (Android 8.0+)	cargo-ndk	Primary mobile
Android ARMr7	armv7-linux-androideabi	Tier 2	API 26+ (Android 8.0+)	cargo-ndk	Legacy devices
Android x86_64	x86_64-linux-android	Tier 2	API 26+ (Android 8.0+)	cargo-ndk	Emulators
HarmonyOS		Tier 2		cross +	OpenHarmony target

Platform	Target Triple	Rust Tier	Min OS Version (product-supported)	Build Tool	Notes
	aarch64-unknown-linux-ohos		HarmonyOS NEXT 5.0+ (API 12+)	OHOS SDK	
Aurora OS	aarch64-unknown-linux-gnu	Tier 1	Aurora OS 4.x+ (Sailfish OS-derived)	cross	Standard Linux ARM
Web	wasm32-unknown-unknown	Tier 2	Chrome 90+, Firefox 88+, Edge 90+, Safari 15+	wasm-pack	Browser crypto only

Reconciliation note (Revision 2): this table previously stated a looser *Rust-toolchain* floor (e.g., macOS 11+, Android API 24+, "Sailfish 4+") that is technically buildable but does not match the *product-supported* minimum OS versions declared in MVP2_ARCHITECTURE.md §1.2 and MVP2_OVERVIEW.md §4.1 — the values a QA matrix, app-store listing, or support policy would actually use. The "Min OS Version" column now states the product-supported minimum; where the Rust toolchain can technically target an older OS, that is a build-system implementation detail, not a customer-facing commitment, and is not tracked here.

5.2 Cargo Configuration

```
# Cargo.toml
[package]
name = "helix-core"
version = "0.2.0"
edition = "2021"
rust-version = "1.78"
authors = ["Helix VPN Team"]
license = "MPL-2.0"
repository = "https://github.com/helixvpn/helix-core"

[lib]
crate-type = ["cdylib", "staticlib", "rlib"]

[[bin]]
name = "uniffi-bindgen"
path = "src/bin/uniffi-bindgen.rs"

[dependencies]
```

```
# Core async runtime
tokio = { version = "1.35", features = ["rt-multi-thread", "net",
    "io-util", "sync", "time", "macros"] }

# WireGuard implementation
boringtun = { version = "0.6", optional = true }

# QUIC/MASQUE
quinn = { version = "0.11", optional = true }
h3 = { version = "0.0.6", optional = true }

# TLS
rustls = { version = "0.23", default-features = false, features =
    ["ring", "std", "tls12"] }
rustls-pemfile = "2.0"

# Cryptography
ring = { version = "0.17", default-features = false }
x25519-dalek = { version = "2.0", features = ["static_secrets",
    "getrandom"] }
chacha20poly1305 = { version = "0.10", features = ["heapless",
    "reduced-round"] }
blake2 = "0.10"
sha2 = "0.10"
hkdf = "0.12"
zeroize = { version = "1.7", features = ["derive"] }
secrecy = "0.8"

# Post-quantum (optional)
aws-lc-rs = { version = "1.6", optional = true }

# TUN interface
tun-rs = { version = "2.0", features = ["async"] }

# DNS
hickory-resolver = { version = "0.24", features = ["dns-over-
    rustls", "dns-over-https-rustls"] }

# Serialization
serde = { version = "1.0", features = ["derive"] }
serde_json = "1.0"

# Networking
bytes = "1.5"
async-trait = "0.1"
futures = "0.3"

# Error handling
thiserror = "1.0"

# Logging
tracing = "0.1"
```



```

tracing-subscriber = { version = "0.3", features = ["env-
    filter"] }

# Platform bindings
uniffi = { version = "0.28", optional = true }
wasm-bindgen = { version = "0.2", optional = true }
js-sys = { version = "0.3", optional = true }

# Android
jni = { version = "0.21", optional = true }
android_logger = { version = "0.14", optional = true }

# Utilities
once_cell = "1.19"
parking_lot = "0.12"
ipnet = "2.9"
base64 = "0.22"
rand = "0.8"

[dev-dependencies]
tokio-test = "0.4"
proptest = "1.4"
criterion = "0.5"
mockall = "0.12"

[features]
default = ["wireguard", "dns", "kill-switch"]
wireguard = ["dep:boringtun"]
shadowsocks = []
masque = ["dep:quinn", "dep:h3"]
kill-switch = []
split-tunnel = []
post-quantum = ["dep:aws-lc-rs"]
daita = []
dns = []
android = ["dep:jni", "dep:android_logger"]
wasm = ["dep:wasm-bindgen", "dep:js-sys"]
uniffi = ["dep:uniffi"]
flutter = []
test-mock-tun = []

[profile.release]
opt-level = 3
lto = "thin"
codegen-units = 16
panic = "unwind"
strip = "debuginfo"

[profile.release-mobile]
inherits = "release"
opt-level = "z"
lto = true

```

```
codegen-units = 1
panic = "abort"
strip = true

[profile.release-wasm]
inherits = "release"
opt-level = "z"
lto = true
codegen-units = 1
panic = "abort"
strip = true
```

5.3 Per-Platform Build Configuration

```
# .cargo/config.toml

# macOS: Build universal binary
[target.aarch64-apple-darwin]
rustflags = ["-C", "link-arg=-Wl,-undefined,dynamic_lookup"]

[target.x86_64-apple-darwin]
rustflags = ["-C", "link-arg=-Wl,-undefined,dynamic_lookup"]

# iOS
[target.aarch64-apple-ios]
rustflags = ["-C", "link-arg=-Wl,-undefined,dynamic_lookup"]
linker = "clang"
ar = "ar"

[target.aarch64-apple-ios-sim]
rustflags = ["-C", "link-arg=-Wl,-undefined,dynamic_lookup"]

# Android
[target.aarch64-linux-android]
linker = "aarch64-linux-android33-clang"
ar = "llvm-ar"

[target.armv7-linux-androideabi]
linker = "armv7a-linux-androideabi33-clang"
ar = "llvm-ar"

[target.x86_64-linux-android]
linker = "x86_64-linux-android33-clang"
ar = "llvm-ar"

# Windows
[target.x86_64-pc-windows-msvc]
rustflags = ["-C", "target-feature=+crt-static"]

# Linux ARM64 (for cross-compilation)
[target.aarch64-unknown-linux-gnu]
```

```
linker = "aarch64-linux-gnu-gcc"

# HarmonyOS
[target.aarch64-unknown-linux-ohos]
linker = "/path/to/ohos-sdk/llvm/bin/aarch64-unknown-linux-ohos-clang.sh"
ar = "/path/to/ohos-sdk/llvm/bin/llvm-ar"
```

5.4 Binary Size Optimization Strategies

Optimization	Desktop Profile	Mobile Profile	WASM Profile
opt-level	3 (speed)	"z" (size)	"z" (size)
lto	"thin"	true	true
codegen-units	16	1	1
panic	"unwind"	"abort"	"abort"
strip	"debuginfo"	true	true
Expected size	~12-18 MB	~5-8 MB	~500 KB-1 MB

Build commands per platform

macOS Universal Binary

```
cargo build --release --target x86_64-apple-darwin
cargo build --release --target aarch64-apple-darwin
lipo -create -output libhelix_core.dylib \
    target/x86_64-apple-darwin/release/libhelix_core.dylib \
    target/aarch64-apple-darwin/release/libhelix_core.dylib
```

iOS XCFramework

```
cargo build --release --target aarch64-apple-ios --profile release-mobile
cargo build --release --target aarch64-apple-ios-sim --profile release-mobile
# (Followed by UniFFI binding generation and xcodebuild -create-xcframework)
```

Android

```
cargo ndk --target aarch64-linux-android --android-platform 33 \
    -- build --profile release-mobile
cargo ndk --target armv7-linux-androideabi --android-platform 33 \
    -- build --profile release-mobile
cargo ndk --target x86_64-linux-android --android-platform 33 \
    -- build --profile release-mobile
```

Linux

```
cross build --release --target x86_64-unknown-linux-gnu
cross build --release --target aarch64-unknown-linux-gnu
```

```
# Windows
```

```
cargo build --release --target x86_64-pc-windows-msvc
```

```
# WASM
```

```
wasm-pack build --target web --out-dir pkg/ --profile release-wasm
```

5.5 Supply-Chain & Build Integrity (New in Revision 2)

The previous draft specified *what* to build for each target but not how to prove *what actually got built* — a genuine enterprise-readiness gap given that a VPN client is exactly the kind of security-sensitive binary a security-conscious customer (or their procurement/compliance team) will demand provenance for. This subsection is the architectural contract; the release-process detail (signing, attestation storage, canary gating) lives in MVP2_SECURITY_PERFORMANCE.md §10.

Reproducible builds. Every one of the 14 target triples in §5.1 MUST build deterministically from a pinned toolchain and lockfile:

```
# rust-toolchain.toml (repo root – pins the exact toolchain for every CI runner)
```

```
[toolchain]
```

```
channel = "1.78.0"
```

```
components = ["rustfmt", "clippy"]
```

```
targets = [
```

```
    "x86_64-apple-darwin", "aarch64-apple-darwin",
```

```
    "aarch64-apple-ios", "aarch64-apple-ios-sim",
```

```
    "x86_64-pc-windows-msvc", "aarch64-pc-windows-msvc",
```

```
    "x86_64-unknown-linux-gnu", "aarch64-unknown-linux-gnu",
```

```
    "aarch64-linux-android", "armv7-linux-androideabi", "x86_64-linux-android",
```

```
    "aarch64-unknown-linux-ohos", "wasm32-unknown-unknown",
```

```
]
```

- `cargo build --locked` is mandatory in CI (never `cargo update` inside a release build) — `Cargo.lock` is committed and treated as a release artifact, not a convenience file.
- `SOURCE_DATE_EPOCH` is pinned to the release-tag commit's author timestamp so embedded build timestamps do not vary run-to-run.
- A quarterly "reproducibility drill" rebuilds the last released tag from a clean checkout on a second, independent CI runner and diffs the resulting artifact hashes — this is the anti-bluff check for the reproducibility claim itself, not just a one-time assertion.


Software Bill of Materials (SBOM). Every release artifact ships a companion SBOM generated in CI, never hand-maintained:

Artifact class	SBOM Tool	Format
Rust core (all 14 targets)	cargo-cyclonedx	CycloneDX JSON
Tauri desktop bundles (npm + cargo deps)	syft (dir scan of the built .app/.msi/.AppImage)	CycloneDX JSON + SPDX
Flutter mobile bundles (pub + cargo deps)	cyclonedx-flutter plugin + cargo-cyclonedx merge	CycloneDX JSON
Browser extension (npm deps + WASM)	syft	CycloneDX JSON

SBOMs are attached to the GitHub Release alongside the signed artifact and its checksum file, and are diffed release-to-release in CI — a dependency appearing in the diff that was not part of the reviewed PR set fails the release gate (supply-chain injection detection). cargo audit and cargo vet (already part of the CI pipeline per §7.5) remain the vulnerability/provenance checks; SBOM generation is the disclosure artifact enterprise customers request, not a replacement for those checks.

6. FFI & Binding Generation

The diagram below is the architecture overview this document previously lacked (docs/research/CROSS_CUTTING_GAP_ANALYSIS.md §3.2): the helix-core crate's internal module boundaries (§1.4, §2) on top, the single HelixVpnApi public-API entry point (§3.1) all bindings call through, and the concrete FFI mechanism (§3.2–§3.6, detailed per-target below in §6.1–§6.6) each platform surface actually uses to reach it.

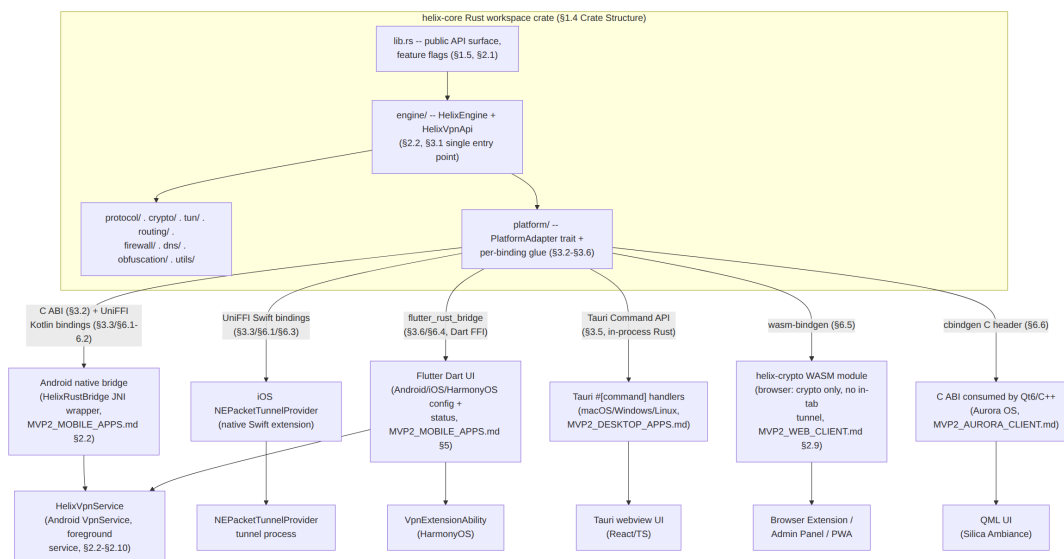

6.1 UniFFI Setup for Kotlin (Android) and Swift (iOS)

```
# uniffi.toml
[bindings.kotlin]
package_name = "com.helixvpn.core"
cdylib_name = "helix_core"

[bindings.swift]
module_name = "HelixCoreFFI"

[bindings.python]
module_name = "helix_core"

#!/bin/bash
# scripts/generate-bindings.sh

set -e

LIB_NAME="helix_core"
TARGET_DIR="target"

echo "=== Generating UniFFI Bindings ==="

# Generate for all languages from compiled library
cargo run --bin uniffi-bindgen generate \
  --library "${TARGET_DIR}/release/lib${LIB_NAME}.dylib" \
  --language kotlin \
  --out-dir bindings/android/

cargo run --bin uniffi-bindgen generate \
  --library "${TARGET_DIR}/release/lib${LIB_NAME}.dylib" \
  --language swift \
  --out-dir bindings/ios/

echo "=== Bindings Generated ==="
echo "Kotlin: bindings/android/${LIB_NAME}.kt"
echo "Swift: bindings/ios/${LIB_NAME}.swift"
```

6.2 Kotlin Integration (Android)

```
// Android app integration
package com.helixvpn.app

import com.helixvpn.core.HelixVpnCore
import com.helixvpn.core.VpnConfig
import com.helixvpn.core.ConnectionStatus

class VpnService : android.net.VpnService() {
    private var core: HelixVpnCore? = null
```

```

fun connect(config: VpnConfig) {
    core = HelixVpnCore(config)
    val status = core!!.connect()

    when (status) {
        ConnectionStatus.CONNECTED -> {
            // Establish TUN via VpnService.Builder
            establishTunnel()
        }
        else -> handleError(status)
    }
}

private fun establishTunnel() {
    val builder = Builder()
    builder.setSession("HelixVPN")
    builder.addAddress("10.64.0.1", 32)
    builder.addRoute("0.0.0.0", 0)
    builder.addDnsServer("10.64.0.1")
    builder.setMtu(1420)
    builder.setBlocking(true) // Kill switch

    val fd = builder.establish()
    // Pass fd to Rust core for TUN I/O
    passFdToCore(fd)
}

```

6.3 Swift Integration (iOS)

```

// iOS app integration
import Foundation
import NetworkExtension
import HelixCoreFFI // UniFFI-generated module

class PacketTunnelProvider: NEPacketTunnelProvider {
    private var core: HelixVpnCore?

    override func startTunnel(
        options: [String: NSObject]?,
        completionHandler: @escaping (Error?) -> Void
    ) {
        let config = VpnConfig(
            protocol: "wireguard",
            serverHost: "us-east.helix.vpn",
            serverPort: 51820,
            privateKeyB64: loadPrivateKey(),
            serverPublicKeyB64: serverPublicKey,
            dnsServers: ["10.64.0.1"],
            killSwitchEnabled: true
        )
    }
}

```

```

do {
  core = try HelixVpnCore(config: config)
  let status = try core!.connect()

  let settings =
    NEPacketTunnelNetworkSettings(tunnelRemoteAddress:
    config.serverHost)
    settings.ipv4Settings = NEIPv4Settings(
      addresses: ["10.64.0.1"],
      subnetMasks: ["255.255.255.255"]
    )
    settings.ipv4Settings?.includedRoutes = [
      NEIPv4Route(destinationAddress: "0.0.0.0",
      subnetMask: "0.0.0.0")
    ]
    settings.dnsSettings = NEDNSSettings(servers:
    ["10.64.0.1"])
    settings.mtu = NSNumber(value: 1420)

    setTunnelNetworkSettings(settings) { error in
      completionHandler(error)
    }
  } catch {
    completionHandler(error)
  }
}
}

```

6.4 flutter_rust_bridge Configuration

```

# pubspec.yaml dependencies
flutter_rust_bridge: ^2.0

# rust_builder/rust_builder.yaml
# Auto-generated by flutter_rust_bridge_codegen

// src/bin/flutter_bridge.rs (generated)
// flutter_rust_bridge_codegen generates this automatically.

```

6.5 WASM-bindgen for Web Target

```

// src/platform/wasm.rs

use wasm_bindgen::prelude::*;

#[wasm_bindgen]
pub struct WasmVpnCore {
  runtime: wasm_bindgen_futures::JsFuture,
}

```



```

#[wasm_bindgen]
impl WasmVpnCore {
    #[wasm_bindgen(constructor)]
    pub fn new() -> Self {
        console_error_panic_hook::set_once();
        Self { /* ... */ }
    }

    /// Initialize crypto module (usable in browser extension).
    #[wasm_bindgen]
    pub async fn generate_keypair(&self) -> Result<JsValue,
        JsValue> {
        let (secret, public) =
            crate::crypto::x25519::generate_keypair();
        let result = serde_json::json!({
            "private_key": base64::encode(secret.as_bytes()),
            "public_key": base64::encode(public.as_bytes()),
        });
        Ok(JsValue::from_str(&result.to_string()))
    }

    /// Encrypt a message (for proxy-based browser VPN).
    #[wasm_bindgen]
    pub async fn encrypt_message(
        &self,
        plaintext: &[u8],
        key_b64: &str,
    ) -> Result<JsValue, JsValue> {
        let key = base64::decode(key_b64)
            .map_err(|e| JsValue::from_str(&e.to_string()))?;
        // ChaCha20-Poly1305 encryption via RustCrypto
        let encrypted =
            crate::crypto::chacha20poly1305::encrypt(plaintext, &key)
                .map_err(|e| JsValue::from_str(&e.to_string()))?;
        Ok(JsValue::from_str(&base64::encode(&encrypted)))
    }
}

```

6.6 C Header Generation (cbindgen) for Qt/Aurora

```

# cbindgen.toml
language = "C"
cpp_compat = true
namespace = "helix"

[parse]
parse_deps = false

[export]
item_types = ["enums", "structs", "functions", "typedefs"]

[fn]

```

```
args = "horizontal"
rename_args = "None"

[struct]
rename_fields = "None"

# Generate C header
cbindgen --config cbindgen.toml --crate helix-core --output
        include/helix_core.h
```

7. Testing Strategy

7.1 Unit Test Coverage Targets

Module	Target Coverage	Key Test Areas
crypto/	95%+	X25519 key exchange, ChaCha20-Poly1305 roundtrip, HKDF, key zeroization
engine/	90%+	State machine transitions, config validation, error handling
protocol/ wireguard/	85%+	Handshake simulation, packet encapsulate/decapsulate, timer logic
routing/	80%+	Route table manipulation, CIDR matching, split tunnel rules
dns/	80%+	DNS resolution, DoH/DoT parsing, cache behavior
firewall/	75%+	Kill switch rule generation, IPv6 blocking, DNS enforcement
platform/	70%+	FFI boundary safety, memory management, error propagation

7.2 Integration Test Architecture

```
tests/
├─ integration/
│   └─ wireguard_handshake.rs    # Full handshake with test
server
│   └─ connection_lifecycle.rs   # Connect -> transfer ->
disconnect
│   └─ kill_switch_test.rs       # Verify traffic blocked on
disconnect
│   └─ dns_leak_test.rs          # Verify no DNS leaks
│   └─ ipv6_leak_test.rs         # Verify IPv6 blocked
│   └─ split_tunnel_test.rs      # Per-app routing verification
```

		reconnect_test.rs	# Network change handling
		multihop_test.rs	# Multi-hop chain verification
		property/	
		crypto_properties.rs	# Proptest for crypto operations
		mock/	
		mock_tun.rs	# In-memory TUN for unit tests
		bench/	
		throughput.rs	# Criterion benchmarks

7.3 Property-Based Testing for Crypto

```
// tests/property/crypto_properties.rs
```

```
use proptest::prelude::*;
use helix_core::crypto::*;

proptest! {
    /// Property: ChaCha20-Poly1305 encryption is reversible.
    #[test]
    fn chacha20_roundtrip(plaintext in "[a-zA-Z0-9]{1,65536}",
        key in "[0-9a-f]{64}") {
        let key_bytes = hex::decode(&key).unwrap();
        let encrypted =
            chacha20poly1305::encrypt(plaintext.as_bytes(),
                &key_bytes).unwrap();
        let decrypted = chacha20poly1305::decrypt(&encrypted,
            &key_bytes).unwrap();
        prop_assert_eq!(plaintext.as_bytes(), &decrypted);
    }

    /// Property: X25519 key exchange produces identical shared secrets.
    #[test]
    fn x25519_key_agreement(
        a_secret in "[0-9a-f]{64}",
        b_secret in "[0-9a-f]{64}"
    ) {
        let a_bytes = hex::decode(&a_secret).unwrap();
        let b_bytes = hex::decode(&b_secret).unwrap();

        let (a_priv, a_pub) = x25519::keypair_from_seed(&a_bytes);
        let (b_priv, b_pub) = x25519::keypair_from_seed(&b_bytes);

        let shared_a = x25519::derive_shared(&a_priv, &b_pub);
        let shared_b = x25519::derive_shared(&b_priv, &a_pub);

        prop_assert_eq!(shared_a, shared_b);
    }

    /// Property: SecretKey zeroizes on drop.
    #[test]
    fn secret_key_zeroized(data in "[a-zA-Z0-9]{32}") {
```

```

        let mut key = SecretKey::new(data.as_bytes().to_vec());
        drop(key);
        // Memory should be zeroed ( verified via Miri in CI )
    }
}

```

7.4 Mock TUN Device for Testing

// tests/mock/mock_tun.rs

```

use helix_core::tun::TunDevice;
use tokio::sync::mpsc;
use bytes::Bytes;

```

*/// A mock TUN device that channels packets through memory queues.
 /// Used for unit testing the protocol and engine layers without
 /// requiring root privileges or actual network interfaces.*

```

pub struct MockTun {
    tx: mpsc::Sender<Bytes>,    // Packets "written" to TUN
    rx: mpsc::Receiver<Bytes>, // Packets "read" from TUN
    mtu: std::sync::atomic::AtomicU16,
}

```

```

impl MockTun {
    pub fn new() -> (Self, MockTunHandle) {
        let (app_tx, tun_rx) = mpsc::channel(1024);
        let (tun_tx, app_rx) = mpsc::channel(1024);

        let tun = Self {
            tx: tun_tx,
            rx: tun_rx,
            mtu: std::sync::atomic::AtomicU16::new(1500),
        };

        let handle = MockTunHandle {
            tx: app_tx,
            rx: app_rx,
        };

        (tun, handle)
    }
}

```

```

#[async_trait::async_trait]
impl TunDevice for MockTun {
    async fn create(&self, _addr: String, _dns: Vec<String>) ->
        Result<Arc<dyn TunDevice>> {
        Ok(Arc::new(MockTun::new().0))
    }

    async fn destroy(&self) -> Result<()> {

```

```

        Ok(())
    }

    async fn read_packet(&self, buf: &mut [u8]) -> Result<usize> {
        match self.rx.recv().await {
            Some(packet) => {
                let len = packet.len().min(buf.len());
                buf[..len].copy_from_slice(&packet[..len]);
                Ok(len)
            }
            None => Ok(0),
        }
    }

    async fn write_packet(&self, packet: &[u8]) -> Result<()> {
        self.tx.send(Bytes::copy_from_slice(packet)).await
            .map_err(|_| HelixError::IoError("Mock TUN
closed".into()))?;
        Ok(())
    }

    fn set_mtu(&self, mtu: u16) -> Result<()> {
        self.mtu.store(mtu, std::sync::atomic::Ordering::Relaxed);
        Ok(())
    }

    #[cfg(unix)]
    fn fd(&self) -> std::os::fd::RawFd {
        -1 // Not applicable for mock
    }
}

/// Handle for the test to inject and receive packets.
pub struct MockTunHandle {
    tx: mpsc::Sender<Bytes>,
    rx: mpsc::Receiver<Bytes>,
}

impl MockTunHandle {
    /// Inject a packet as if it came from the network.
    pub async fn inject_packet(&self, packet: Bytes) ->
        Result<()> {
        self.tx.send(packet).await
            .map_err(|_| HelixError::IoError("Mock TUN
closed".into()))
    }

    /// Receive a packet that was written to the TUN device.
    pub async fn receive_packet(&mut self) -> Option<Bytes> {
        self.rx.recv().await
    }
}

```

7.5 CI Test Pipeline

```
# .github/workflows/test.yml
name: Helix Core Tests

on: [push, pull_request]

jobs:
  unit-tests:
    runs-on: ubuntu-latest
    steps:
      - uses: actions/checkout@v4
      - uses: dtolnay/rust-toolchain@stable
      - uses: Swatinem/rust-cache@v2

      - name: Run unit tests
        run: cargo test --all-features --lib

      - name: Run property tests
        run: cargo test --all-features --test property

      - name: Run Miri (memory safety)
        run: |
          rustup component add miri
          cargo miri test --lib -- crypto::

  integration-tests:
    runs-on: ubuntu-latest
    steps:
      - uses: actions/checkout@v4
      - uses: dtolnay/rust-toolchain@stable

      - name: Run integration tests (mock TUN)
        run: cargo test --features test-mock-tun --test
              integration

  coverage:
    runs-on: ubuntu-latest
    steps:
      - uses: actions/checkout@v4
      - uses: dtolnay/rust-toolchain@stable
      - uses: taiki-e/install-action@cargo-tarpaulin

      - name: Generate coverage report
        run: cargo tarpaulin --all-features --out xml

      - name: Upload to Codecov
        uses: codecov/codecov-action@v3
        with:
          files: cobertura.xml
          fail_ci_if_error: true
```

8. Security Architecture

8.1 Threat Model Mitigations

Threat	Mitigation	Implementation
Memory exposure of private keys	zeroize + secrecy crates	All key material zeroed on drop
Traffic leak on disconnect	Kill switch (fail-closed)	Platform firewall rules block all non-VPN traffic
DNS leak	Custom DNS + firewall interception	All UDP/53 blocked except to VPN DNS
IPv6 leak	IPv6 blocking by default	Platform-specific IPv6 disable
Key extraction from memory	mlock on Linux/macOS	Prevent keys from being swapped to disk
Replay attacks	SIP022 AEAD-2022 (Shadowsocks), WireGuard nonce	Built-in replay windows
Quantum-computer harvesting	Hybrid X25519 + ML-KEM	post-quantum feature flag
Protocol fingerprinting	DAITA traffic morphing	Optional padding + timing randomization

8.2 Secure Key Storage Per Platform

```
// src/platform/secure_storage.rs

/// Factory for platform-specific secure storage.
pub fn create_secure_storage() -> Result<Box<dyn SecureStorage>> {
    #[cfg(target_os = "ios")]
    return Ok(Box::new(ios::IosKeychainStorage::new()));

    #[cfg(target_os = "android")]
    return Ok(Box::new(android::AndroidKeystoreStorage::new()));

    #[cfg(target_os = "macos")]
    return Ok(Box::new(macos::MacKeychainStorage::new()));

    #[cfg(target_os = "windows")]
    return Ok(Box::new(windows::WindowsCredentialStorage::new()));

    #[cfg(target_os = "linux")]
    return Ok(Box::new(linux::LinuxKeyringStorage::new()));
}
```

```
    return Ok(Box::new(linux::LinuxSecretStorage::new()));  
}
```

9. Performance Budget

9.1 Target Metrics

Metric	Desktop Target	Mobile Target	Measurement Method
Throughput (WireGuard)	500+ Mbps	100+ Mbps	iperf3 over tunnel
Connection time	< 100 ms	< 200 ms	WireGuard handshake duration
CPU usage (idle)	< 1%	< 2%	Process monitoring
CPU usage (500 Mbps)	< 25%	< 40%	Process monitoring
Memory footprint	< 100 MB	< 50 MB	RSS measurement
Kill switch response	< 100 ms	< 200 ms	tcpdump + kernel timestamps
Binary size	< 20 MB	< 8 MB	ls -la of artifact
Battery impact (hourly)	N/A	< 5%	OS battery monitoring

9.2 Profiling Strategy

```
# CPU profiling with flamegraph  
cargo install flamegraph  
cargo flamegraph --bin helix_core_test -- connect  
  
# Memory profiling with valgrind (Linux)  
valgrind --tool=massif target/release/helix_core_test  
  
# Benchmark with Criterion  
cargo bench --bench throughput
```

10. Appendices

Appendix A: Dependency Crate Selection Rationale

Crate	Purpose	Alternative	Why Chosen
boringtun	WireGuard implementation	wireguard-rs, gotatun	Most mature, millions of devices, good FFI
tokio	Async runtime	async-std	Dominant ecosystem, best performance
rustls	TLS	native-tls, OpenSSL	Memory-safe, audited, ring-based
x25519-dalek	X25519 keys	ring::agreement	Audited, pure Rust, constant-time
chacha20poly1305	AEAD cipher	ring::aead	Pure Rust, no_std, NCC audited
tun-rs	TUN interface	tun, tokio-tun	Most platform support, OpenHarmony
hickory-resolver	DNS resolution	trust-dns	DoT/DoH/DoQ, pure Rust
quinn	QUIC	quiche	Better Rust integration, async-native
uniffi	Binding generation	Manual FFI, BoltFFI	Production at Mozilla, Kotlin+Swift
bytes	Zero-copy buffers	Vec<u8>	Reference-counted, industry standard

Appendix B: Glossary

Term	Definition
AEAD	Authenticated Encryption with Associated Data
BoringTun	Cloudflare's Rust WireGuard implementation

Term	Definition
DAITA	Defense Against AI-guided Traffic Analysis (Mullvad)
DoH/DoT/DoQ	DNS-over-HTTPS / DNS-over-TLS / DNS-over-QUIC
FFI	Foreign Function Interface
KEM	Key Encapsulation Mechanism
MASQUE	Multiplexed Application Substrate over QUIC Encryption
ML-KEM	Module-Lattice-based KEM (NIST post-quantum standard)
Noise Protocol	Framework for building crypto protocols (used by WireGuard)
SIP022	Shadowsocks AEAD-2022 cipher specification
TUN	Virtual network interface at Layer 3 (IP)
UniFFI	Mozilla's multi-language binding generator
WFP	Windows Filtering Platform
XCFramework	Apple's binary framework format for multi-architecture

Appendix C: References

Document	Description
mvp2_wide03.md	Protocol implementations research (WireGuard, Shadowsocks, MASQUE)
mvp2_wide07.md	Shared core architecture research (UniFFI, cross-compilation, build system)
mvp2_wide08.md	Security and performance research (kill switch, obfuscation, testing)
WireGuard Protocol	https://www.wireguard.com/protocol/
BoringTun Repository	https://github.com/cloudflare/boringtun
UniFFI Documentation	https://mozilla.github.io/uniffi-rs/
MASQUE RFC 9298	https://datatracker.ietf.org/doc/html/rfc9298
Shadowsocks SIP022	https://shadowsocks.org/doc/aead.html
NIST Post-Quantum Standards	https://csrc.nist.gov/projects/post-quantum-cryptography

Specification Version: 0.2.0-MVP2 Last Updated: 2026-01-21
Status: Draft for Review