

MASQUE / QUIC Transport

MASQUE / QUIC Transport

Revision: 2 Last modified: 2026-07-04T12:00:00Z

Rev 2 (enterprise-hardening pass, 2026-07-04): added §6.4 QUIC anti-amplification limit (RFC 9000 §8.1) as an explicit DDoS-resilience mechanism for the gateway edge — a gap identified against the parent task's enterprise-hardening checklist (rate-limiting / DDoS resilience at the Connector/Gateway roles). No other section changed; all prior content (§0–§10) stands.

Master technical specification — Volume 2 (Data Plane), nano-detail document deepening the **MASQUE / QUIC Transport** section of [01-data-plane.md](#) §3.3. Scope: the masque-h3 implementation of the Transport trait — WireGuard datagram → HTTP Datagram (RFC 9297) → QUIC DATAGRAM frame (RFC 9221) → HTTP/3 CONNECT-UDP (RFC 9298) to :443/udp, the hand-rolled CONNECT-UDP framing on quinn + h3, SNI masquerade, browser-HTTP/3 indistinguishability, MTU 1280, and the edge termination side. This is a **SPEC** — it describes what to build; it does not contain the shipping product. Source evidence cited inline by id: [01-DP §N] = [01-data-plane.md](#); [research-masque §N] = the MASQUE research note; [04 ARCH §N] / [04 P0 §N] = the refined architecture / Phase-0 spike; [SYNTHESIS §N] = the cross-document synthesis; [RFC NNNN] = the cited IETF RFC (all RFC facts are sourced through [research-masque §1] unless otherwise noted). Facts not grounded in the evidence base are marked UNVERIFIED per constitution §11.4.6.

0. Position, invariants, and what this document owns

masque-h3 is **one** Transport impl among N; it is the headline obfuscating carrier and **Mullvad's actual mechanism** — *Mullvad's "QUIC mode" is not a separate protocol, it is WireGuard*

tunnelled over MASQUE/HTTP-3 [01-DP §0, §3.3; 04_ARCH §0, §22; research-masque §2]. This document owns the `crates/helix-transport/src/masque.rs` module and its edge-side termination in `bin/helix-edge.rs`; it does **not** re-specify the Transport trait (owned by [01-DP §3.1]), the WG crypto core (`helix-wg`, [01-DP §4]), the ladder (`helix-core/src/ladder.rs`, [01-DP §5.3]), or `connect-ip` (RFC 9484, a distinct datapath, [01-DP §3.4]).

0.1 Inherited invariants this module must not break

#	Invariant	Source	How <code>masque-h3</code> upholds it
I1	Transport never sees plaintext — carries only already-encrypted WG datagrams.	[01-DP I1]	The HTTP Datagram payload is the opaque WG datagram byte-for-byte (§3); <code>masque.rs</code> never parses it.
I2	Transport carries unreliable datagrams , never an ordered byte stream.	[01-DP I2]	WG datagrams ride QUIC DATAGRAM frames (RFC 9221) , <i>not</i> a QUIC stream — preserving WG loss semantics, avoiding head-of-line blocking [01-DP §3.1; 04_P0 §4.2, §5.1; research-masque §1].
I4	One transport crate, three consumers — the client obfuscation code is the edge de-obfuscation code.	[01-DP I4]	<code>masque.rs</code> framing functions (<code>encode_http_datagram/decode_http_datagram</code>) are shared byte-for-byte by client and <code>helix-edge</code> (Decision D5 = Rust edge) [01-DP §11.2; SYNTHESIS §3 D5].
I5	No-logging by construction — only aggregate counters.	[01-DP I5]	The module exports only <code>TransportHealth</code> EWMA counters; no per-packet/per-flow durable state (§7).

0.2 Maturity caveat (load-bearing, governs the whole module)

There is NO turnkey Rust crate that gives RFC 9298 CONNECT-UDP client+proxy out of the box. You hand-roll it on top of quinn + h3. This is exactly what Mullvad did [research-masque §3, §5]. Concretely the module implements, by hand: (a) the Extended-CONNECT request/response (RFC 9220 :protocol bootstrap), (b) the Quarter-Stream-ID + context-id HTTP-Datagram mux (RFC 9297/9298), (c) the proxy UDP-socket relay (edge side) [research-masque §3]. Strong evidence this is

the trodden path: Mullvad's mullvad-daemon depends on quinn/quinn_udp [research-masque §2]. This immaturity-vs-Go (masque-go is turnkey) is itself the input to Decision D5/G4 [01-DP §11.2; 04_P0 §7; research-masque §4]. The documented G2 unblock if Rust proves painful: prototype MASQUE first in Go to pass G2, then port [01-DP §3.8; 04_P0 §13].

1. The RFC stack (the standardised building blocks)

WG-over-MASQUE is a layering of four published IETF **Proposed Standards** (stable, not drafts) [research-masque §1]:

RFC	Role	What masque-h3 uses from it
RFC 9298 — Proxying UDP in HTTP (CONNECT-UDP)	MASQUE control plane. Extended-CONNECT (:protocol = connect-udp) to a URI template, proxy opens a UDP socket to the target and relays.	The one-time flow-setup request at dial() (§2); the URI template (§4.2).
RFC 9297 — HTTP Datagrams & the Capsule Protocol	The HTTP Datagram abstraction + Quarter Stream ID multiplexing tying each datagram to its request stream. Over HTTP/3 they ride the QUIC DATAGRAM frame.	The per-WG-datagram framing (§3).
RFC 9221 — QUIC DATAGRAM frame extension	Unreliable, un-retransmitted datagram frame inside a QUIC connection. Negotiated via the max_datagram_frame_size transport parameter.	The data-plane carrier (send_datagram/read_datagram), upholding I2.
RFC 9220 — Bootstrapping WebSockets / Extended CONNECT over HTTP/3	Adds the :protocol pseudo-header that CONNECT-UDP requires over HTTP/3.	The Extended-CONNECT handshake (§2.3).

Distinct sibling (out of scope here): **RFC 9484 — Proxying IP in HTTP (CONNECT-IP)** — proxies IP packets, not UDP; *not* what Mullvad uses; specified separately in [01-DP §3.4] [research-masque §1].

The canonical data-plane flow [01-DP §3.3; 04_P0 §5.1; research-masque §1]:

client WG datagram (Bytes, already-encrypted, opaque – I1)
 ↳ HTTP Datagram (RFC 9297, context-id = 0 for the proxied UDP payload)
 ↳ QUIC DATAGRAM frame (RFC 9221, unreliable – matches WG semantics, I2)
 ↳ QUIC / HTTP-3 connection to https://gateway:443 (looks like web)
 ↳ EDGE: extract HTTP Datagram → WG datagram → kernel WG fast path

Client — helix-transport/src/masque.rs

WG datagram (Bytes)
opaque, already-encrypted
(I1)

encode_http_datagram

HTTP Datagram payload
[Context ID=0][UDP
Proxying Payload=WG]

prepend Quarter Stream ID

QUIC DATAGRAM frame
body
[Quarter Stream ID][HTTP
Datagram payload]

quinn


Connection.send_datagram

QUIC/HTTP-3 conn →
gateway:443/udp
ALPN h3,
SNI=masquerade host

2. dial() — connection bring-up state machine

dial(TransportConfig::MasqueH3 { url, sni, bind, congestion }) returns a live Box<dyn Transport> within a bounded timeout, or a TransportError that the ladder maps to escalation [01-DP §3.1, §5.3]. The CONNECT-UDP request establishes the proxied UDP **flow once at dial()**; thereafter WG datagrams ride as HTTP Datagrams with **no per-packet HTTP round trip** [01-DP §3.3; 04_P0 §5.1; research-masque §1].

2.1 The bring-up state machine

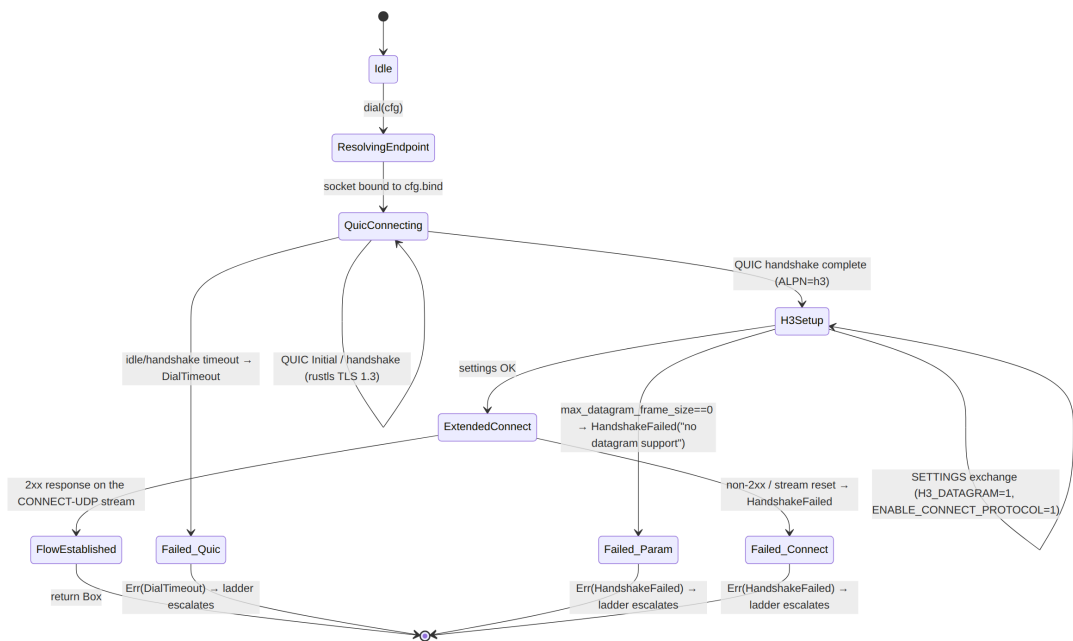

2.2 Bring-up step contract (each step is a hard gate, no guessing — §11.4.6)

Step	Action	Success signal	Failure → Trans
1. Resolve + bind	Parse url → SocketAddr (gateway :443/udp); bind a quinn::Endpoint to cfg.bind.	socket bound	Io → caller treat DialTimeout
2. QUIC connect	endpoint.connect_with(client_cfg, addr, &sni)?.await — rustls TLS 1.3, ALPN = h3 , SNI = cfg.sni (the masquerade host, §5).	QUIC handshake complete	DialTimeout (idle handshake time EndpointBlocked Initial is dropped repeatedly (DP

<target_host>/<target_port> resolve to the gateway's **internal** WireGuard endpoint (e.g. 127.0.0.1/51820) — the proxy opens a UDP socket there and relays [01-DP §3.3; 04_P0 §5.1; research-masque §1]. The client never sees that internal address; it is the URI-template target the edge fixes (§4.2).

The .well-known/masque/udp/{target_host}/{target_port}/template shape is the RFC 9298 canonical default [research-masque §1]. HelixVPN **pins the template at the edge** (§4.2) so the client sends a fixed :path; the exact pinned literal is a §11.4.35 project-instantiation value, recorded in the edge config, not guessed here.

3. Wire format — the per-datagram framing (the hand-rolled core)

This is the byte-level contract the implementer hand-rolls (the maturity caveat, §0.2). Two nested framings sit between the WG datagram and quinn's send_datagram(Bytes).

3.1 QUIC variable-length integer (the encoding primitive)

All length/id fields below are **QUIC varints** (RFC 9000 §16 — the QUIC base over which RFC 9221/9297 are defined). The 2 most-significant bits of the first byte select length: 00→1 byte (6-bit value, 0-63), 01→2 bytes (14-bit, 0-16383), 10→4 bytes (30-bit), 11→8 bytes (62-bit).

The varint encoding is RFC-9000-standard QUIC and is **UNVERIFIED against this evidence base** (the cited research notes do not reproduce RFC 9000 §16); it is stated as the well-known QUIC primitive the implementer pins against RFC 9000. For HelixVPN's identifiers (flow_ctx = 0, small qstream_id) the common case is the **1-byte** form.

3.2 Layer A — HTTP Datagram payload (RFC 9297 + RFC 9298 context)

The **HTTP Datagram Payload** carried for a CONNECT-UDP flow is (RFC 9297 + RFC 9298 [research-masque §1]):

```
HTTP Datagram Payload (CONNECT-UDP / RFC 9298) {
    Context ID          (QUIC varint)    ; = 0 → the proxied UDP
    payload itself
    UDP Proxying Payload (bytes)         ; = the opaque WireGuard
```



```
datagram (I1)
}
```

- Context ID = 0 is the registered "UDP packet payload" context for CONNECT-UDP [01-DP §3.3; 04_P0 §5.1; research-masque §1]. As a 1-byte varint it is the single byte 0x00.
- The UDP Proxying Payload is the WG datagram **verbatim** — masque.rs does not inspect it (I1).

So `encode_http_datagram(0, wg) ⇒ 0x00 || wg` (1 prefix byte for the common ctx-0 case). `decode_http_datagram` reads the leading varint context-id; a non-zero context-id is an **unknown context** and the datagram **MUST** be dropped silently per RFC 9297 (a future extension context), not surfaced as an error (§6 E-CTX).

3.3 Layer B — QUIC DATAGRAM frame body (RFC 9221 + RFC 9297 mux)

Over HTTP/3, an HTTP Datagram rides one QUIC DATAGRAM frame; the frame body is (RFC 9297 §2.1 [research-masque §1]):

```
QUIC DATAGRAM frame body {
    Quarter Stream ID    (QUIC varint)    ; = (CONNECT-UDP request
stream-id) / 4
    HTTP Datagram Payload (bytes)        ; = Layer A above
}
```

- **Quarter Stream ID** ties the datagram to its CONNECT-UDP request stream (RFC 9297 multiplexing) [research-masque §1, §3]. The client's first client-initiated bidirectional stream is stream-id 0 → Quarter Stream ID 0 (1-byte varint 0x00); HelixVPN runs exactly one CONNECT-UDP flow per QUIC connection, so `qstream_id` is fixed for the connection's life.
- quinn prepends the QUIC DATAGRAM **frame type** + handles the QUIC framing; the module supplies only this frame **body** to `Connection::send_datagram(Bytes)` [04_P0 §5.2; research-masque §3].

3.4 Full on-the-wire byte layout (common case: ctx 0, qstream 0)

```
quinn-supplied: [ DATAGRAM frame type (0x30/0x31) ] ← quinn
writes this
module-supplied body:
    byte 0:      Quarter Stream ID varint    = 0x00      ← Layer B
    byte 1:      Context ID varint           = 0x00      ← Layer A
    bytes 2..n:  WireGuard datagram (opaque, already-encrypted)
← I1
```

Per-datagram framing overhead in the common case = 2 bytes (Quarter Stream ID)

- Context ID), atop QUIC/UDP/IP headers. This 2-byte module overhead, plus QUIC short-header + AEAD tag + UDP + IP, is what drives `effective_mtu()` to **1280** (§3.5). The QUIC DATAGRAM frame-type byte values `0x30/0x31` are RFC 9221 and are UNVERIFIED against this evidence base — pinned by quinn, captured in §8 wire evidence, never assumed.

3.5 `effective_mtu()` = 1280

`masque-h3` reports **1280** [01-DP §3.3, §10; 04_P0 §5.2]:

- **1280 is the IPv6 minimum-MTU floor** — the largest value guaranteed deliverable on any IPv6 path without fragmentation [01-DP §10].
 - QUIC + HTTP-Datagram + UDP-proxy overhead "eats headroom"; 1280 is the **measure & tune** floor, not a computed exactness [01-DP §3.3, §10; 04_P0 §5.2]. The exact MTU penalty is **quantified in Phase 0** (record MTU/throughput/CPU vs plain-udp) so the ladder's cost model is real [01-DP §10; 04_P0 §5.3, §8].
 - The orchestrator sets inner WG MTU = `min(masque.effective_mtu()=1280, path-MTU-discovered)` [01-DP §10]. A WG datagram exceeding the budget after framing is a hard `TransportError::Oversize` — never silent truncation [01-DP §10].
 - Relation to the RFC 9221 `max_datagram_frame_size` step-3 floor (≥ 1252): $1252 = 1280 \text{ IPv6 floor} - 28$ (typical IPv6+UDP minimal headroom) is a derived sanity floor for "can a ≥ 1280 -inner datagram ever fit"; the precise constant is UNVERIFIED and MUST be measured (§8), not assumed.
-

4. Steady-state datapath (send / recv)

Once `FlowEstablished`, the module is a pure datagram relay — no HTTP round trips [01-DP §3.3; 04_P0 §5.1].

4.1 The Transport impl (signatures + framing wiring)

```
// crates/helix-transport/src/masque.rs
use async_trait::async_trait;
use bytes::{Bytes, BytesMut, BufMut, Buf};
use crate::{Transport, TransportError, TransportHealth, HealthCell};
```

```

pub struct MasqueTransport {
    conn: quinn::Connection,    // established QUIC/H3 connection
                                // to gw:443 (ALPN h3)
    qstream_id: u64,            // Quarter Stream ID of the
                                // CONNECT-UDP request stream (§3.3)
    flow_ctx: u64,              // CONNECT-UDP context-id (= 0)
                                // established at dial() (§3.2)
    health: HealthCell,         // RTT EWMA + last-recv age + send-
                                // error counters (I5, §7)
}

#[async_trait]
impl Transport for MasqueTransport {
    async fn send(&self, wg: Bytes) -> Result<(), TransportError>
    {
        let body = encode_quic_datagram_body(self.qstream_id,
        self.flow_ctx, &wg)?; // §3.3+§3.2
        self.conn
            .send_datagram(body) //
            // RFC 9221 unreliable (I2)
            .map_err(map_send_err)?; //
            // §6 error mapping
        self.health.mark_send_ok();
        Ok(())
    }

    async fn recv(&self) -> Result<Bytes, TransportError> {
        loop {
            let dg =
                self.conn.read_datagram().await.map_err(map_recv_err)?;
            match decode_quic_datagram_body(self.qstream_id,
            self.flow_ctx, dg) {
                Ok(Some(wg)) => { self.health.mark_recv(); return
                Ok(wg); }
                Ok(None)      => continue, // foreign qstream /
                // unknown ctx → drop, keep reading (§6)
                Err(e)         => return Err(e),
            }
        }
    }

    fn kind(&self) -> &'static str { "masque-h3" }
    fn effective_mtu(&self) -> u16 {
        1280 } // §3.5
    fn health(&self) -> TransportHealth { self.health.snapshot() }
    async fn close(&self) -> Result<(), TransportError> {
        self.conn.close(0u32.into(),
        b"bye"); // QUIC CONNECTION_CLOSE

        Ok(()) //
        // idempotent
    }
}

```

4.2 The framing helpers (the I4-shared byte contract)

```
/// Encode one outbound WG datagram into a QUIC DATAGRAM frame
    BODY.
/// Layout (§3.4): [Quarter Stream ID varint][Context ID varint]
    [WG bytes].
/// Shared byte-for-byte with the edge decode path (I4).
fn encode_quic_datagram_body(qsid: u64, ctx: u64, wg: &[u8]) ->
    Result<Bytes, TransportError> {
    let need = varint_len(qsid) + varint_len(ctx) + wg.len();
    // Enforce the transport budget BEFORE handing to quinn (§3.5,
    // §6 Oversize).
    if need > MASQUE_MAX_DATAGRAM_BODY { return
        Err(TransportError::Oversize(need)); }
    let mut b = BytesMut::with_capacity(need);
    put_varint(&mut b, qsid);      // Layer B (§3.3)
    put_varint(&mut b, ctx);       // Layer A context-id (§3.2)
    b.put_slice(wg);               // opaque WG datagram (I1)
    Ok(b.freeze())
}

/// Decode one inbound QUIC DATAGRAM frame body back to a WG
    datagram.
/// Returns Ok(None) for a datagram that is NOT our flow (foreign
    Quarter Stream ID
/// or unknown context-id) – RFC 9297 says drop silently, keep the
    connection (§6).
fn decode_quic_datagram_body(exp_qsid: u64, exp_ctx: u64, mut dg:
    Bytes)
    -> Result<Option<Bytes>, TransportError>
{
    let qsid = get_varint(&mut
        dg).ok_or(TransportError::Quic("trunc qsid".into()))?;
    if qsid != exp_qsid { return
        Ok(None); }                // not our CONNECT-UDP flow → drop
    let ctx = get_varint(&mut
        dg).ok_or(TransportError::Quic("trunc ctx".into()))?;
    if ctx != exp_ctx { return
        Ok(None); }                // unknown context (future ext) →
        drop
    Ok(Some(dg))                    //
        remainder = WG datagram, verbatim
}


// QUIC varint primitives (RFC 9000 §16, §3.1). `UNVERIFIED`
    exactness – pin to RFC 9000.
fn varint_len(v: u64) -> usize { if v < 64 {1} else if v < 16384
    {2} else if v < 1<<30 {4} else {8} }
fn put_varint(b: &mut BytesMut, v: u64) { /* 2-MSB length tag +
    big-endian value */ }
fn get_varint(b: &mut Bytes) -> Option<u64> { /* read tag, then
    1/2/4/8 bytes */ }
```

```

/// Largest module-supplied DATAGRAM body that fits the negotiated
    QUIC datagram
/// limit; derived from the peer's max_datagram_frame_size (step
    3) MINUS quinn's
/// own frame-type byte. Computed at dial(), never hardcoded
    (§3.5).
const MASQUE_MAX_DATAGRAM_BODY: usize = /* set from negotiated
    max_datagram_frame_size */ 1300;

```

4.3 Send / recv sequence

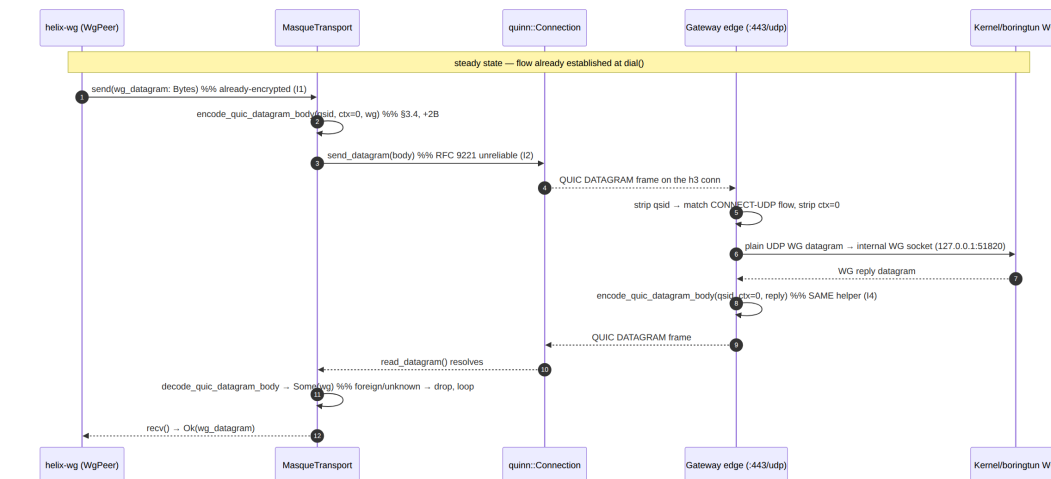

5. SNI masquerade & browser-HTTP/3 indistinguishability

5.1 What is actually claimed (and what is not — §11.4.6 honest boundary)

The **public, documented** DPI-resistance mechanism is **collateral-damage deterrence**: the flow is HTTP/3 on QUIC/UDP 443; blocking it risks breaking the open web (Google, YouTube, Cloudflare all run HTTP/3), so censors face a high false-positive cost [research-masque §2; 04_ARCH §3.3]. To a passive observer the flow is **indistinguishable from a browser doing HTTP/3** to a web server [01-DP §3.3; 04_P0 §5.3].

What is NOT publicly documented by Mullvad, and therefore an OPEN design problem, not a solved checkbox [research-masque §2, §5]: the exact TLS/QUIC ClientHello fingerprint matching (uTLS-style), the SNI value used, the ALPN set ordering, domain-fronting, and how closely the QUIC Initial mimics Chrome/Firefox. **A serious parity effort MUST treat QUIC/TLS fingerprint mimicry as an explicit research/risk**

item, never claim it is done. This module therefore specifies the *seams* for fingerprint control and marks the fingerprint policy itself UNVERIFIED / research-tracked.

5.2 SNI + ALPN config seam

```
// TransportConfig::MasqueH3 carries the fingerprint-relevant
//      knobs:
//      url      : "https://<gateway-host>:443"    - the dialled
//      endpoint
//      sni      : "<masquerade host>"             - TLS SNI sent in
//      the QUIC Initial (§5.3)
//      congestion : Cubic | Bbr                   - CC profile
//      (§6.3, lossy-mobile knob)
```

- **SNI = the masquerade host**, set to a believable web hostname; the edge's certificate **MUST** be valid for it (§5.4) so the TLS handshake completes cleanly and the flow "looks like web" [01-DP §3.3; 04_P0 §5.3].
- **ALPN MUST be exactly h3** (and only h3) — a non-h3 ALPN, or an extra protocol, is a fingerprint deviation from real browser HTTP/3 (§5.5).
- The Phase-0 tshark/tls SNI capture (G2) verifies SNI matches the masquerade host and the flow classifies as HTTP/3 with **no WG signature** [01-DP §3.3, §12.1; 04_P0 §5.3, §8].

5.3 The QUIC/TLS fingerprint surface (research-tracked, UNVERIFIED)


The following are the parameters a uTLS-equivalent would have to mimic for a real browser. HelixVPN exposes them as a future FingerprintProfile config object; their **target values are UNVERIFIED and an open research item** [research-masque §2, §5] — the spec mandates the *seam*, not specific values:

Surface	Why it matters	Status
TLS ClientHello cipher/extension order	uTLS-style mimicry of Chrome/Firefox	UNVERIFIED — research item; Mullvad does not publish seam: derive from a captured browser profile; values UNVERIFIED
QUIC transport parameters (incl. max_datagram_frame_size, idle timeout, flow-control windows)	a non-browser-like set is a fingerprint	
ALPN	must be h3 only	specified (§5.2)

Surface	Why it matters	Status
SNI value	must be a plausible web host	specified (§5.2), value is §11.4.35 project config
QUIC version / Initial packet shape	Chrome/Firefox-like Initial	UNVERIFIED — research item

5.4 Edge masquerade (decoy site for non-CONNECT-UDP traffic)

The edge :443 listener serves a **believable decoy site** to anything that is *not* a valid CONNECT-UDP flow (probes, scanners) — native edge behaviour replacing the original doc's Nginx-camouflage idea [01-DP §3.3; 04_P0 §5.4; 04_ARCH §3.3]. Phase 0 ships a static "it's just a website" page behind the same QUIC listener [04_P0 §5.4]. Classification rule (§4 edge side):

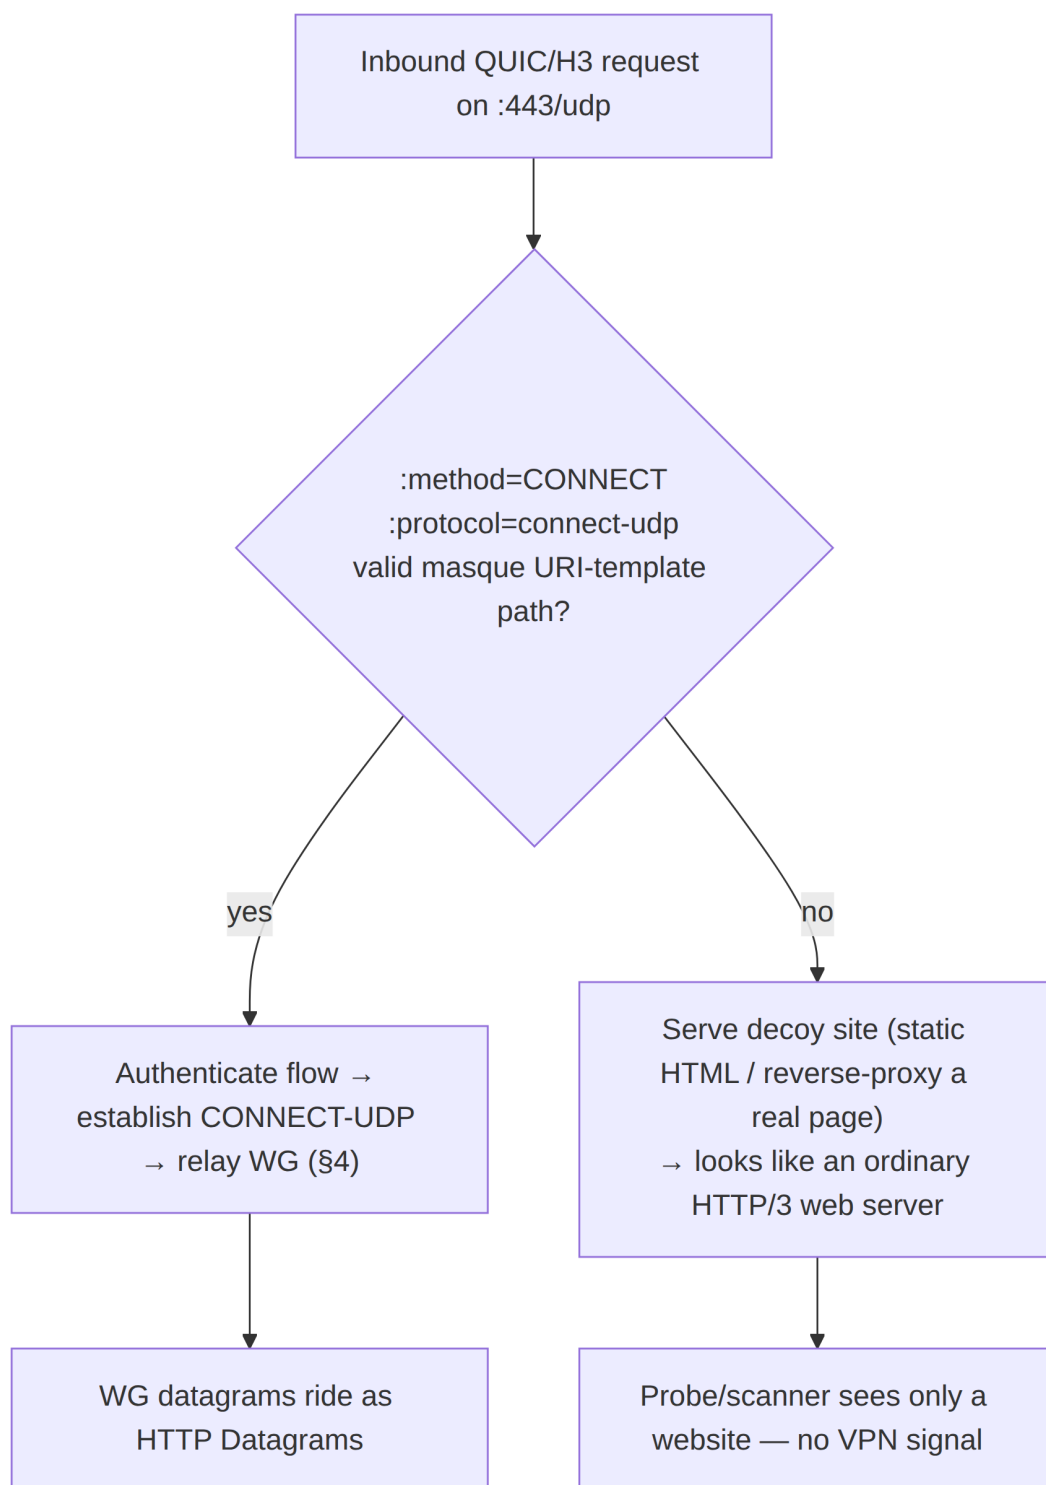

5.5 Indistinguishability acceptance (the G2 wire-fingerprint gate)

tshark capture of the masque-h3 flow **MUST** classify it as **HTTP/3 with no WG signature**, with SNI matching the masquerade host, while plain WG/UDP is nft-blocked [01-DP §3.3, §12.1; 04_P0 §5.3, §8]. This is the G2 / S3 gate and the SEC-DPI test point (§8).

6. Error taxonomy, edge cases, and ladder mapping

The module maps every failure onto the shared `TransportError` enum [01-DP §3.1]; the ladder consumes `DialTimeout` / `HandshakeFailed` / `EndpointBlocked` as escalation triggers and `Closed` as a reconnect trigger [01-DP §5.3].

6.1 Error mapping table

Condition (masque-h3)	TransportError	Ladder effect [01-DP §5.3]
QUIC handshake idle/timeout at <code>dial()</code>	<code>DialTimeout</code>	escalate to next rung
QUIC Initial repeatedly dropped (DPI on :443)	<code>EndpointBlocked</code>	escalate; note region telemetry (I5, aggregate)
<code>peer</code> <code>max_datagram_frame_size == 0</code> (step 3)	<code>HandshakeFailed("no datagram support")</code>	escalate
missing H3 settings (step 4)	<code>HandshakeFailed("no h3-datagram / extended-connect")</code>	escalate
CONNECT-UDP non-2xx / stream RESET (step 5)	<code>HandshakeFailed(status)</code>	escalate
<code>send_datagram</code> over budget	<code>Oversize(n)</code>	orchestrator lowers inner WG MTU or fragments at L3 [01-DP §10]
<code>send_datagram</code> transient (datagram queue full / blocked)	<code>Quic(msg)</code>	counted in <code>health.send_errors</code> ; caller retries/ keeps state
QUIC CONNECTION_CLOSE / path lost mid-session	<code>Closed</code>	orchestrator → Reconnecting, <code>re-dial()</code> (per-network memory may re-pin masque-h3)
<code>read_datagram</code> foreign Quarter Stream ID	(none) → drop, keep reading	no effect — RFC 9297 silent drop (§4.2)
<code>read_datagram</code> unknown context-id ($\neq 0$)	(none) → drop, keep reading	

Condition (masque-h3)	TransportError	Ladder effect [01-DP §5.3]
		no effect — future-extension context (§3.2)

6.2 Edge cases (each is a test point, §8)

- **E-CTX — unknown context-id:** an inbound HTTP Datagram with context-id $\neq 0$ is a registered-future-extension payload; **drop silently, do not error, do not close** the connection (RFC 9297) [research-masque §1]. (Test: UNIT framing.)
- **E-QSID — foreign Quarter Stream ID:** datagram for a different stream/flow on the same QUIC connection; drop silently and continue the recv loop (§4.1). HelixVPN runs one flow per connection, so this is normally adversarial/spurious. (Test: UNIT.)
- **E-TRUNC — truncated framing:** a datagram too short to hold the qsid/ctx varints $\rightarrow$ Quic("trunc ...") and the orchestrator treats it as a single lost datagram (I2 — WG tolerates loss), **not** a connection kill. (Test: UNIT + CHAOS.)
- **E-OVERSIZE — datagram > budget:** enforced *before* quinn (§4.2) $\rightarrow$ 0versize; orchestrator lowers inner MTU rather than silently truncating [01-DP §10]. (Test: UNIT + BENCH MTU sweep.)
- **E-0RTT — early data:** 0-RTT QUIC resumption is **disabled by default** for the obfuscation path (a 0-RTT Initial is a distinguishable fingerprint and risks replay); seam exists to enable per FingerprintProfile once §5.3 is settled. Status UNVERIFIED — research-tracked. (Test: SEC-DPI.)
- **E-RECONNECT — roaming / NAT-rebind:** QUIC connection migration may carry the flow across a client IP change; if migration fails the module surfaces Closed and the ladder re-dials, with WG's own roaming latching onto the new path [01-DP §8]. (Test: CHAOS iface-flap.)
- **E-DRAIN — close() idempotency:** close() calls conn.close() once; a second call is a no-op (Ok(())) (§4.1). (Test: UNIT.)

6.3 Congestion-control knob

congestion: Cubic | Bbr selects the quinn congestion controller [01-DP §3.1, §3.3]: **Cubic default; Bbr for lossy mobile** networks (the Hysteria "Brutal" lineage / quinn window-ratio tuning is the reference) [01-DP §3.3, §11_arch tuning note]. Loss resilience is the reason mobile got this feature: under netem loss 5%, masque-h3 MUST sustain higher goodput than the UDP-over-TCP strawman [01-DP §3.3, §12.1; 04_P0 §5.3, §8].

6.4 Edge DDoS resilience — the QUIC anti-amplification limit (enterprise hardening)

Gap closed (2026-07-04): the edge's :443/udp listener is a public, unauthenticated QUIC endpoint before a client completes address validation — exactly the shape of a reflection/amplification vector (a spoofed-source client sends a small QUIC Initial, the server replies with a larger Handshake/response to the *spoofed* victim address). QUIC (RFC 9000 §8.1) closes this by construction, and helix-edge **MUST** enforce it, not merely inherit it silently from quinn:

- **The 3× rule.** Until the client's address is validated (by successfully processing an Initial packet whose UDP datagram was padded to ≥ 1200 bytes, or by returning a Retry token the client echoes back), the server **MUST NOT send more than three times the number of bytes received** from that (as-yet-unvalidated) address. quinn implements this limit internally; helix-edge **MUST NOT** bypass or relax it via any transport-config knob, and the Phase-0 G4/G2 benchmark harness **MUST** capture the enforced ratio (bytes-sent : bytes-received per unvalidated 4-tuple) as evidence, not assume quinn's default is wired in correctly.
- **Retry tokens under load.** When the edge's concurrent-unvalidated-handshake count crosses an operator-tunable threshold (`masque_retry_threshold`, default: an evidence-calibrated value from the Phase-0 rig, UNVERIFIED until measured), the edge **SHOULD** start issuing QUIC Retry packets (stateless, HMAC-tagged token, no per-source-IP state held) before accepting the CONNECT-UDP flow — the standard QUIC answer to a handshake flood, symmetric to WireGuard's own MAC1/cookie-reply defence ([helix-wg §14.3](#), [wireguard-core.md](#)). This composes with, and does not replace, connection-ID-based routing/load-balancing at the edge.
- **Amplification-factor test point.** A new LOAD/SEC test point (feeds §8 table): send an Initial from a spoofed/unvalidated source, assert the edge's *response* byte count never exceeds 3× the request byte count before validation, captured via a pcap byte-count ratio — never a config-only assertion that "quinn handles it."
- **Composition with the edge decoy (§5.4).** A non-CONNECT-UDP probe that never completes address validation is bounded by the same 3× ceiling regardless of whether it is ultimately routed to the decoy site or the CONNECT-UDP handler — the anti-amplification limit is a QUIC-transport-layer property, applied before HTTP/3 request routing even begins.

This closes a concrete DDoS-resilience gap: without an explicit test asserting the 3× ratio, "quinn handles amplification" is an unverified assumption, not a proven property of helix-edge's configuration (§11.4.6 no-guessing). Cross-references: the

Connector/Gateway-role rate-limiting design lives in [v06-deploy/ha-and-multiregion.md](#) and [v06-deploy/kubernetes.md](#) (edge ingress hardening); this subsection is the transport-layer half of that story.

7. Performance budget & no-logging counters

7.1 The acknowledged tax (anti-bluff — do NOT claim parity speed)

masque-h3 wraps the WG tunnel in a QUIC tunnel; this is **computationally expensive and reduces throughput** — the **double-encryption + double-congestion- control tax** (WG crypto inside QUIC crypto = two AEAD layers; QUIC CC over UDP atop WG's own pacing) [research-masque §2, §5]. Mullvad explicitly acknowledges this and advises "use only when needed" [research-masque §2]. The spec **MUST require captured throughput evidence WG-direct vs WG-over-MASQUE and MUST NOT claim parity speed** [research-masque §5; 01-DP §10].

7.2 Quantified budget (Phase-0 gates, captured not assumed)

Metric	masque-h3 target	Source
Through-tunnel throughput	≥ 50% of plain-UDP	[04_P0 §8; SYNTHESIS §4 G2]
Added latency (p50/p99)	< 15 ms added vs bare	[04_P0 §8]
Handshake time (connect→first-data)	< 2 s	[04_P0 §8]
Loss resilience @ netem loss 5%	goodput > UoT strawman	[01-DP §3.3; 04_P0 §5.3, §8]
MTU	1280 (penalty quantified vs plain-udp)	[01-DP §3.5, §10; 04_P0 §5.2]
Wire fingerprint	HTTP/3, no WG signature (tshark)	[01-DP §12.1; 04_P0 §8]

The plain-udp baseline these are measured against is **≥ 80% of bare link** (the G1 gate) [01-DP §3.2; 04_P0 §8]. So masque-h3's floor is **≥ 50% of (≥ 80% of bare)**.

7.3 No-logging counters (I5)

The module exports **only** the aggregate TransportHealth snapshot — `rtt_ewma_ms`, `last_rcv_age_ms`, `send_errors` [01-DP §3.1, I5] — plus optional aggregate escalation telemetry ("transport masquerade succeeded after N escalations in region R") with **no per-connection/per-packet durable state** [01-DP §5.3 step 6, I5]. No SNI, no flow-id, no peer address is logged durably.

8. Test points (tie to §11.4.169 test types)

Every claim ships captured evidence, not config-only PASS (§11.4.5/.69/.107; [01-DP §12.1]). Test-type abbreviations are the canonical taxonomy of [10-testing-acceptance-and-qa.md §2].

Test point	§11.4.169 type	What it proves	Captured evidence
Framing round-trip — <code>encode_quic_datagram_body</code> • <code>decode</code> = identity for ctx 0, qsid 0 (§3.4)	UNIT	byte-exact framing; mocks allowed only here (§11.4.27)	cargo test vectors + golden hex fixtures
E-CTX / E-QSID / E-TRUNC silent-drop (§6.2)	UNIT	unknown-context / foreign-stream / truncated datagram dropped, connection survives	assertion log
<code>effective_mtu()</code> =1280 enforced; E-OVERSIZE before quinn (§4.2)	UNIT + BENCH	budget enforced, no silent truncation	MTU-sweep CSV
Slice works with plain WG/UDP nft-blocked (S3/G2)	E2E + FA	real censorship evasion, not "QUIC also works"	netns rig run log [04_P0 §3 -count=3 re-runnable (§11.4.98)]
Flow classifies as HTTP/3, no WG signature , SNI = masquerade host (§5.5)	SEC (DPI)	browser-HTTP/3 indistinguishability (public layer)	tshark/pcap capture [01-DP §12.1; 04_P0 §8]
QUIC/TLS fingerprint mimicry (§5.3)	SEC (DPI)	research-tracked UNVERIFIED gap — not a PASS until §5.3 settled; tracked item,	risk-item tick + capture diff vs browser profile

Test point	§11.4.169 type	What it proves	Captured evidence
Anti-amplification enforcement (§6.4): unvalidated-source response bytes $\leq 3 \times$ request bytes	SEC + LOAD	honest SKIP-with-reason (§11.4.3) edge does not amplify toward a spoofed victim (RFC 9000 §8.1)	pcap byte-count ratio per unvalidated 4-tuple
Throughput WG-direct vs WG-over-MASQUE; CPU-per-Gbps; handshake/sec (§7)	BENCH + PERF	quantified tax — no parity claim (§7.1)	bench.sh CSV [04_P0 §8]
Loss resilience @ netem loss 5% beats UoT (§6.3, §7.2)	BENCH + STRESS	QUIC loss recovery (the mobile rationale)	goodput comparison [04_P0 §5.3]
Sustained ≥ 30 s / ≥ 100 -iter framing under load; ≥ 10 parallel conns	STRESS	no leak, no deadlock in the recv pump	stress_chaos. ab_stress_* (§11.4.85)
Mid-flight QUIC CONNECTION_CLOSE / iface-flap → Closed → re-dial recovery (E-RECONNECT)	CHAOS	recovery restores a consistent flow	ab_chaos_* recovery trac (§11.4.85)
recv-pump data-race / deadlock on the hot path	RACE	concurrency-safe send/recv/close	cargo +nightlyloom / tsan
Edge: probe / scanner → decoy site , valid CONNECT-UDP → relay (§5.4)	SEC + E2E	masquerade classification correct	pcap of probe→decoy valid→relay
Self-validated analyzer for the tshark "is-HTTP/3" verdict (golden-good HTTP/3 pcap PASS, golden-bad WG-signature pcap FAIL)	CHAL / HQA	the DPI analyzer itself cannot bluff (§11.4.107(10))	challenges/helix_qa bank entry
iOS: masque-h3 buffers under the NE memory ceiling (run plain-udp AND masque separately)	MEM	QUIC buffers fit $\geq 30\%$ headroom (G3-critical)	Instruments / proc RSS [04_P0 §6]

Anti-bluff stance (§11.4.6). The DPI-evasion SEC test proves only the **public** "looks like HTTP/3 / collateral-damage" layer. The QUIC/TLS fingerprint mimicry layer (§5.3) is an **open research problem** [research-masque §2, §5]; until it is settled it MUST be carried as a tracked risk item with an honest SKIP-with-reason, **never** reported as a passing checkbox.

9. Decisions this module is downstream of (surfaced, not re-resolved)

Decision	Resolution this module assumes	Source
D1 primary obfuscating transport	masque-h3 primary (true Mullvad parity, single Rust impl, WG stays crypto core); Hysteria2 a feature-gated ladder rung	[01-DP §3.8; SYNTHESIS §3 D1]
D5 gateway edge language	Rust (quinn+h3+hand-rolled CONNECT-UDP) so the edge shares this module byte-for-byte (I4); Go (quic-go+masque-go) is the conformance-suite-mitigated fallback decided by G4 benchmark	[01-DP §11.2; 04_P0 §7; research-masque §4]
D6 transport topology	per-leg TransportPolicy makes masque-h3 a user↔gateway-leg choice for free; no module change	[01-DP §11.3]

The G2-unblock contingency (prototype CONNECT-UDP in Go via masque-go, then port to this module) is the documented escape if MASQUE-in-Rust over-runs budget [01-DP §3.8; 04_P0 §13; research-masque §4]; it does not change the trait contract (§4.1) or the wire format (§3) — those are the I4-frozen surfaces.

10. File-by-file build checklist (this module)

File / symbol	Owns	Phase	Phase-0 gate
crates/helix-transport/ src/masque.rs — MasqueTransport (§4.1)	the Transport impl	0	G2 / S3
.../masque.rs — dial() bring-up FSM (§2)	QUIC connect → H3 settings → Extended CONNECT → flow	0	G2 / S3
.../masque.rs — encode/ decode_quic_datagram_body + varint helpers (§3, §4.2)	the hand-rolled RFC 9297/9298	0	G2 / S3 (UNIT)

File / symbol	Owns	Phase	Phase-0 gate
.../masque.rs — FingerprintProfile seam (§5.3)	framing (I4- shared) SNI/ALPN/ transport- param fingerprint knobs (research- tracked)	0→2	SEC (DPI), UNVERIFIED
bin/helix-edge.rs — CONNECT-UDP termination + decoy classifier (§5.4)	edge relay + masquerade	0	G2 / G4 / S3-S4
error mapping map_send_err/map_recv_err (§6.1)	TransportError taxonomy bridge	0	S3

*End of nano-detail document — MASQUE / QUIC Transport.
Parent overview: [01-data-plane.md](#) §3.3, §10, §11.2. Sibling nano-docs in this volume cover the other Transport impls (plain-udp, shadowsocks, udp-over-tcp, lwo, connect-ip, hysteria2) against the same frozen trait [01-DP §3.1]. The Transport trait (§4.1 here), the 1280 MTU (§3.5), and the encode/decode framing byte contract (§3) are I4-frozen surfaces shared client↔edge; their internals may evolve, the wire bytes may not without a coordinated client+edge change. Fingerprint mimicry (§5.3) and the precise h3/h3-datagram SETTINGS/API surface (§2.2) are the two UNVERIFIED, research-tracked items the implementer MUST pin against current RFC + crate text and capture as evidence (§8) — never assume.*