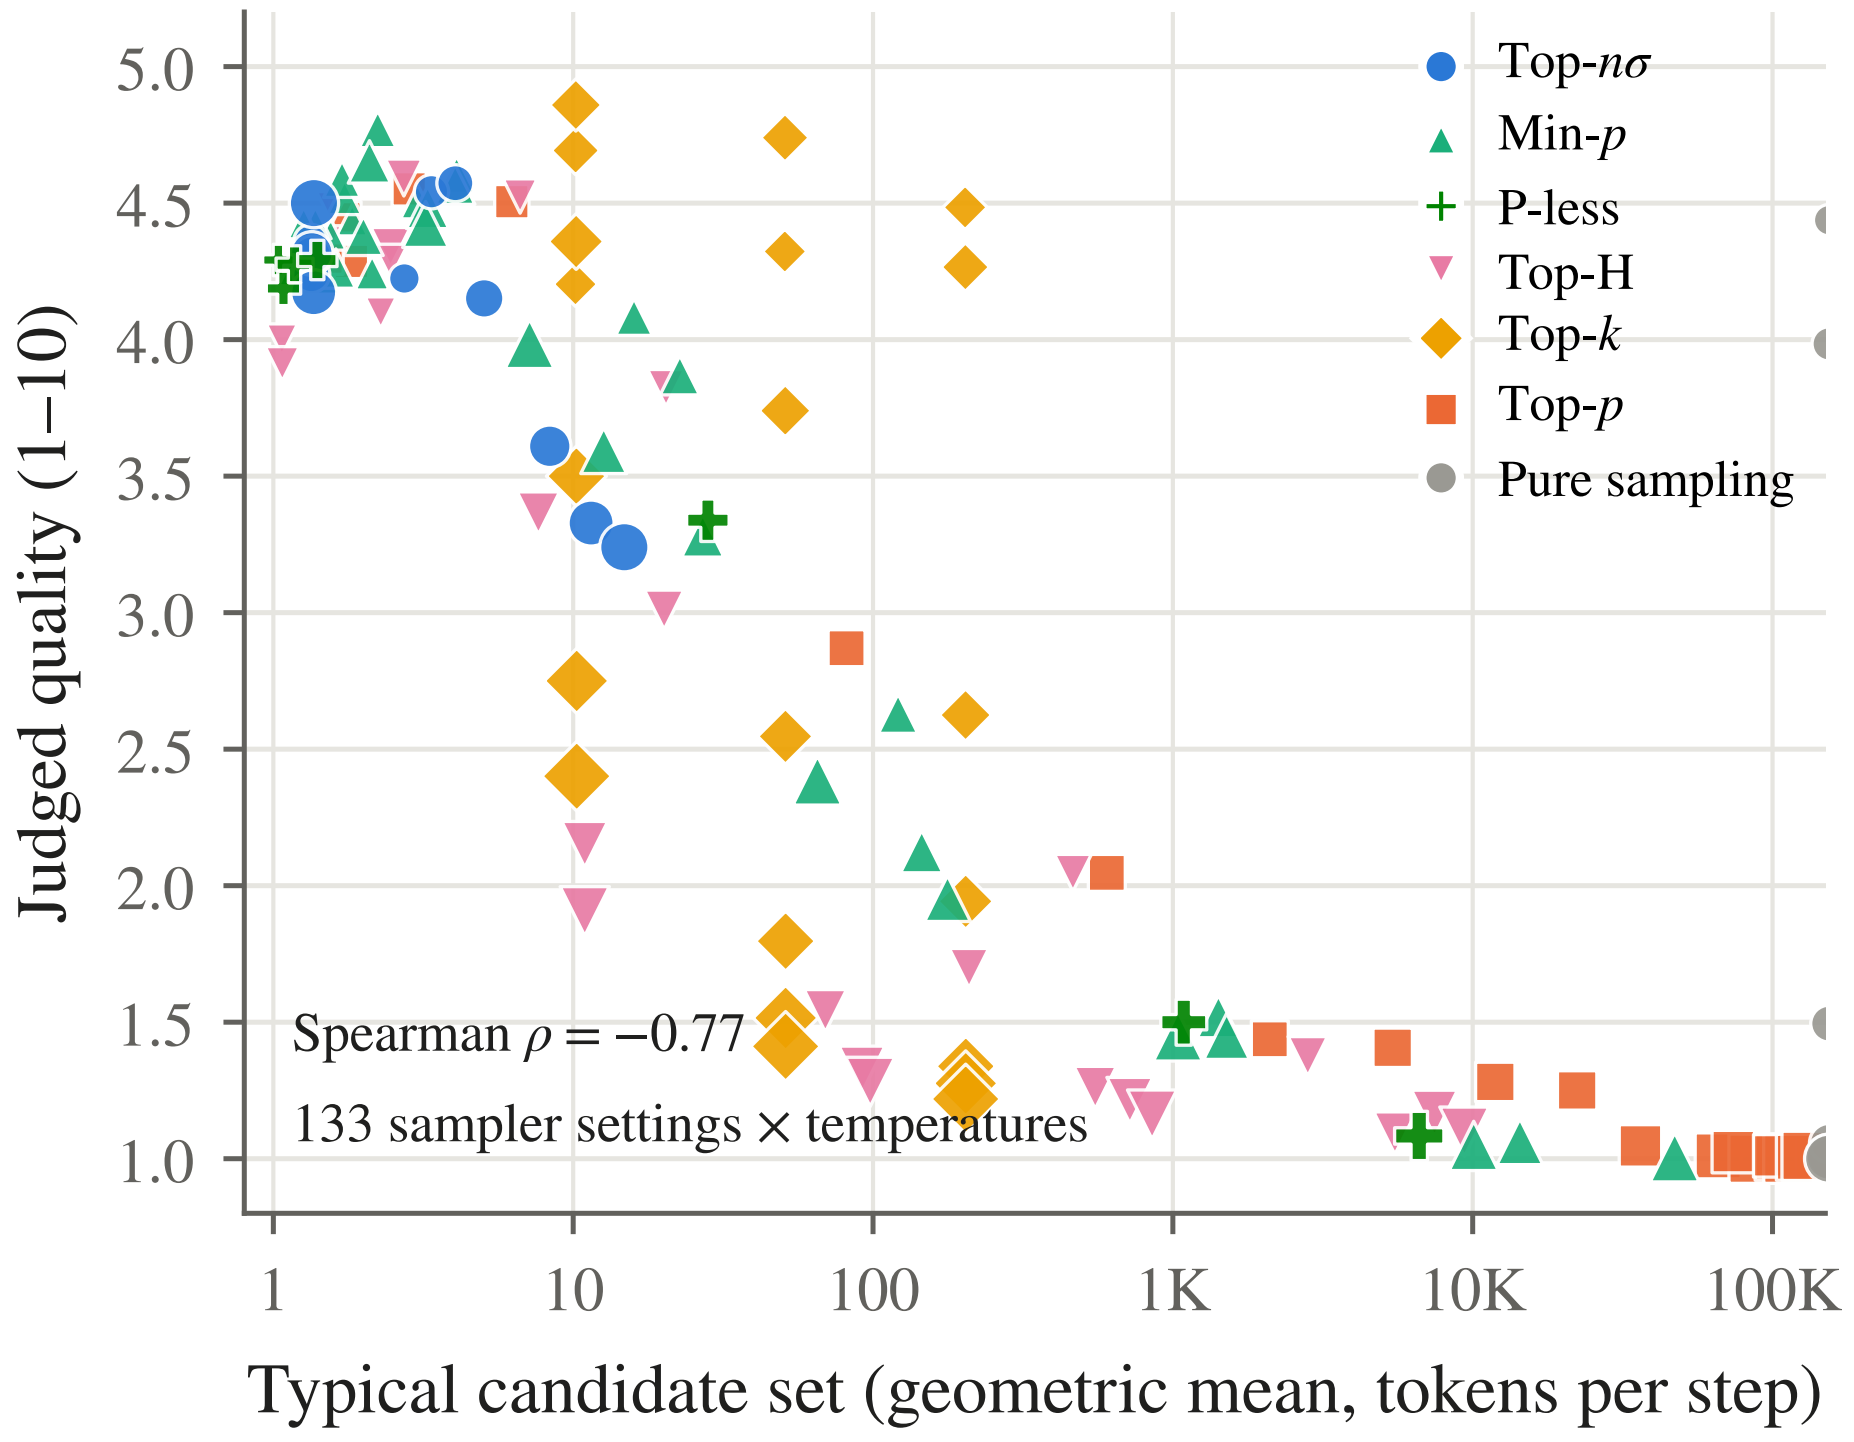
Top-nσ
Min-p
P-less
Top-H
Top-k
Top-p
Pure sampling
Spearman ρ = −0.77
133 sampler settings × temperatures
Judged quality (1–10)
5.0
4.5
4.0
3.5
3.0
2.5
2.0
1.5
1.0
1
10
100
1K
10K
100K
Typical candidate set (geometric mean, tokens per step)