



LLM Based Chunking – using Simulation:

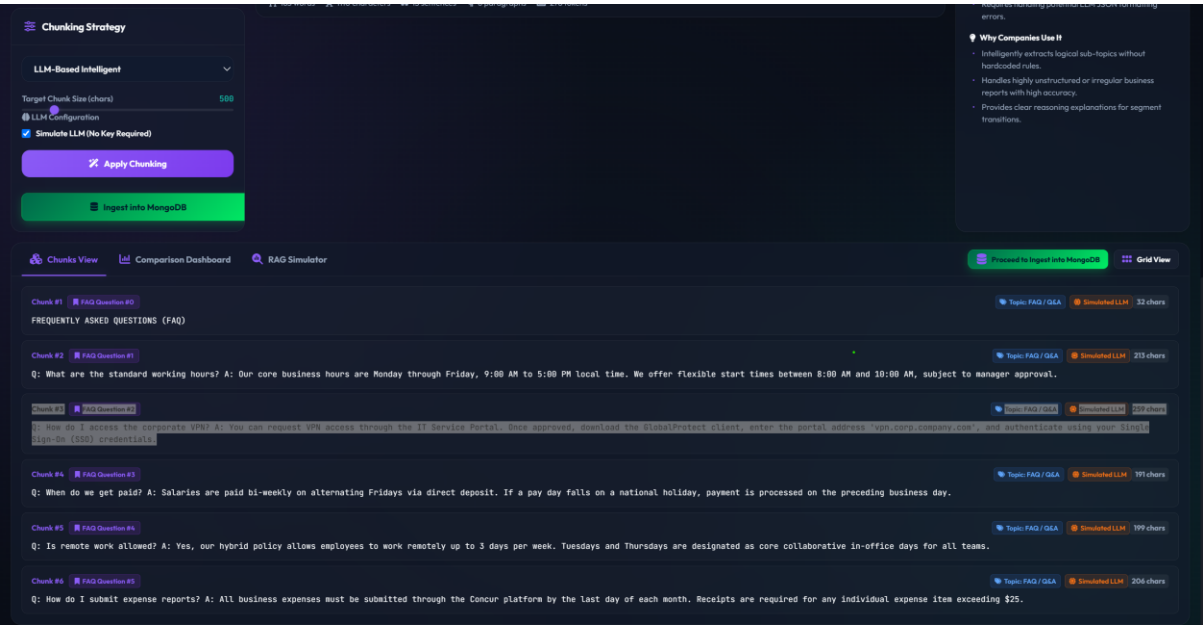

Using LLM:

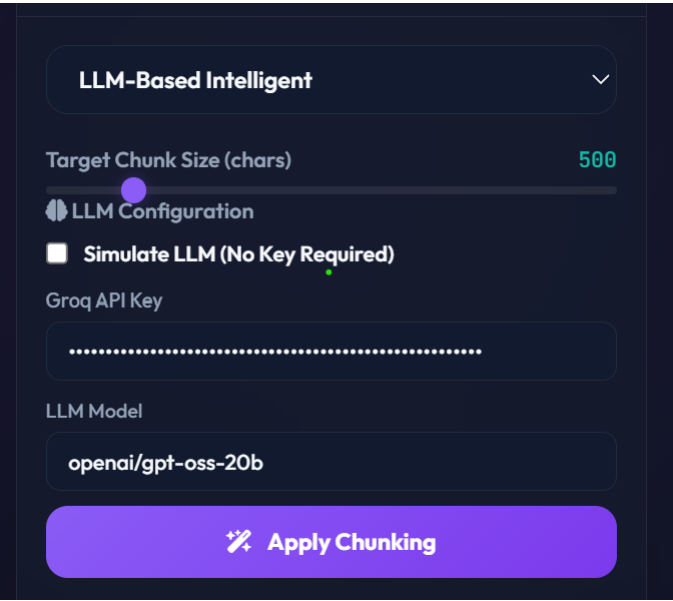

Chunking Strategy

LLM-Based Intelligent

Target Chunk Size (chars)500

LLM Configuration

Simulate LLM (No Key Required)

Groq API Key

LLM Model

openai/gpt-oss-20b

Apply Chunking

Ingest into MongoDB

H 139 wordsA 928 characters44 12 sentences5 paragraphs232 tokens

Very high API cost and latency.

Requires handling potential LLM JSON formatting errors.

Why Companies Use It

Intelligently extracts logical sub-topics without hardcoded rules.

Handles highly unstructured or irregular business reports with high accuracy.

Provides clear reasoning explanations for segment transitions.

Chunks ViewComparison DashboardRAG Simulator

Proceed to Ingest into MongoDBGrid View

Chunk #1Overview

Topic GeneralLive LLM openai/gpt-oss-20b196 chars

1. Overview The Workers API allows developers to deploy serverless JavaScript functions at the edge. This document specifies the routing, headers, and response formats for edge service gateways.

Chunk #2Authentication

Topic SecurityLive LLM openai/gpt-oss-20b242 chars

2. Authentication All requests to the Workers API gateway must include an OAuth 2.0 bearer token in the headers: Header Name: Authorization Format: Bearer <token_string> Invalid or expired tokens will return an HTTP 401 Unauthorized response.

Chunk #3Endpoint Reference

Topic API EndpointsLive LLM openai/gpt-oss-20b257 chars

3. Endpoint Reference - GET /v1/services: Lists all active services deployed at the edge. - POST /v1/services/deploy: Deploys a new version bundle to the specified zone. Payload Format: JSON object containing service name, script body, and route bindings.

Chunk #4Rate Limiting and Quotas

Topic Usage LimitsLive LLM openai/gpt-oss-20b191 chars

4. Rate Limiting and Quotas The edge gateway enforces a rate limit of 1000 requests per minute per client IP address. Exceeding this limit will trigger an HTTP 429 Too Many Requests response.