

# Using\_PyCloudy\_3

June 14, 2017

```
In [1]: %matplotlib inline
import numpy as np
import matplotlib.pyplot as plt
import pyCloudy as pc

In [2]: pc.config.cloudy_exe = '/usr/local/Cloudy/c17.00/source/cloudy.exe'

In [3]: dir_ = '/tmp'
pc.print_make_file(dir_)

In [4]: def set_models(dir_, model_name):
    emis_tab = ['H 1 4861.36A',
                'H 1 6562.85A',
                'Ca B 5875.64A',
                'N 2 6583.45A',
                'O 1 6300.30A',
                'O 2 3726.03A',
                'O 2 3728.81A',
                'O 3 5006.84A',
                'BLND 4363.00A'
                ]

    a = 2.
    b = 1.0
    thetas = np.linspace(0., 90., 6)
    thetas_rad = np.pi / 180. * thetas
    fact_elli = a * b / np.sqrt((b * np.sin(thetas_rad))**2 + (a * np.cos(thetas_rad))**2)
    rs_in = 16.5 + np.log10(fact_elli)
    densities = 4 - np.log10(fact_elli) * 2

    model = pc.CloudyInput()
    model.set_BB(80000., 'q(H)', 47.3)
    model.set_grains()
    model.set_emis_tab(emis_tab)

    for theta, r_in, density in zip(thetas, rs_in, densities):
        model.model_name = '{0}/{1}_{2:.0f}'.format(dir_, model_name, theta)
        model.set_cste_density(density)
        model.set_radius(r_in)
        model.set_theta_phi(theta)
        model.print_input(to_file = True, verbose = False)

In [5]: def def_profiles(m3d):
    """
    This uses the default velocity law (polynome) and default profile (gaussian)
```

```

        """
m3d.set_velocity(params = [20.,60.])
m3d.config_profile(size_spectrum = 51, vel_max = 50, v_turb = 0.01)

In [6]: def def_profiles_user(m3d):
        """
        Use this to define your own expansion velocity
        """
        def velo_polynome(params):
            """
            USer defined expansion velocity
            """
            # params is a 2 elements table, the first element is a table of parameters, the second
            # which is needed to know r, x, y and z to define the velocity.
            coeffs = params[0]
            cub_coord = params[1]
            tmp = 0.
            for i, coeff in enumerate(coeffs):
                # for each parameter we add the corresponding coeff * R**power
                tmp = tmp + coeff * cub_coord.r**i
            tmp = tmp / cub_coord.r
            # to avoid the singularity:
            tt = (cub_coord.r == 0.)
            tmp[tt] = 0
            # Projecting on each one of the 3 axes to obtain the velocity components
            vel_x = tmp * cub_coord.x / np.max(cub_coord.x)
            vel_y = tmp * cub_coord.y / np.max(cub_coord.y)
            vel_z = tmp * cub_coord.z / np.max(cub_coord.z)
            return vel_x, vel_y, vel_z

        def Hb_prof(x, zeta_0):
            """
            The Hbeta profile is sum of 2 blocks of lines (actually 3 + 4 lines)
            """
            res1 = .41 / zeta_0 / np.sqrt(np.pi) * np.exp(-(((x-2.7)/zeta_0)**2))
            res2 = .59 / zeta_0 / np.sqrt(np.pi) * np.exp(-(((x+2.0)/zeta_0)**2))
            return res1 + res2

m3d.set_velocity(velocity_law='user', params = [[20.,60.], m3d.cub_coord], user_function = velo_polynome)
m3d.config_profile(size_spectrum = 41, vel_max = 25, profile_function = Hb_prof, v_turb = 0)

In [7]: def plot_profiles(m3d, x_pos, y_pos):
        plt.plot(m3d.vel_tab,m3d.get_profile('H__1_486136A', axis='x')[:,x_pos,y_pos] * 5, label = 'H')
        plt.plot(m3d.vel_tab,m3d.get_profile('N__2_658345A', axis='x')[:,x_pos,y_pos] * 5, label = 'N')
        plt.plot(m3d.vel_tab,m3d.get_profile('O__3_500684A', axis='x')[:,x_pos,y_pos], label = 'r')
        plt.legend()

In [8]: def other_plots(m3d, proj_axis):
        plt.subplot(331)
        plt.imshow(m3d.get_emis('H__1_486136A').sum(axis = proj_axis)*m3d.cub_coord.cell_size)
        plt.title('Hb')
        plt.colorbar()

        plt.subplot(332)
        plt.imshow(m3d.get_emis('N__2_658345A').sum(axis = proj_axis)*m3d.cub_coord.cell_size)

```

```

plt.title(' [NII] ')
plt.colorbar()

plt.subplot(333)
plt.imshow(m3d.get_emis('O__3_500684A').sum(axis = proj_axis)*m3d.cub_coord.cell_size)
plt.title(' [OIII] ')
plt.colorbar()

plt.subplot(334)
plt.imshow(m3d.get_emis('N__2_658345A').sum(axis = proj_axis)/m3d.get_emis('H__1_486136A').sum(axis = proj_axis))
plt.title(' [NII]/Hb')
plt.colorbar()

plt.subplot(335)
plt.imshow(m3d.get_emis('O__3_500684A').sum(axis = proj_axis)/m3d.get_emis('H__1_486136A').sum(axis = proj_axis))
plt.title(' [OIII]/Hb')
plt.colorbar()

plt.subplot(336)
plt.imshow(m3d.get_ionic('O',1)[n_cut,:,:])
plt.title('O+ cut')
plt.colorbar()

plt.subplot(337)
plt.scatter(m3d.get_ionic('O',1).ravel(),m3d.get_ionic('N',1).ravel()/m3d.get_ionic('O',1).ravel())
c=np.abs(m3d.cub_coord.theta.ravel()), edgecolors = 'none')
plt.title('Colored by |Theta|')
plt.xlabel('O+ / O')
plt.ylabel('N+/O+ / N/O')
plt.colorbar()

plt.subplot(338)
plt.scatter(m3d.get_ionic('O',1).ravel(),m3d.get_ionic('N',1).ravel()/m3d.get_ionic('O',1).ravel())
c=m3d.relative_depth.ravel(),vmin = 0, vmax = 1, edgecolors = 'none')
plt.title('Colored by position in the nebula')
plt.xlabel('O+ / O')
plt.ylabel('N+/O+ / N/O')
plt.colorbar()

plt.subplot(339)
C1 = (m3d.get_ionic('N',1)/m3d.get_ionic('O',1)*m3d.get_ionic('N',2))
C2 = (m3d.get_ionic('N',2))
tt = (m3d.get_ionic('O',1) == 0)
C1[tt] = 0
C2[tt] = 0
V = C1.sum(axis = proj_axis) / C2.sum(axis = proj_axis)
plt.imshow(V)
plt.colorbar()
plt.title('N+/O+ / N/O weighted by NII')
plt.contour(V,levels=[1.0])

```

```

In [9]: model_name = "M3D_1"
pc.log_.calling = 'Model3D : ' + model_name
pc.log_.level = 3

```

```

In [10]: dim = 101
         n_cut = int((dim-1) /2)
         proj_axis = 0

In [11]: set_models(dir_, model_name)

CloudyInput: Input writen in /tmp/M3D_1.0.in
         CloudyInput: Input writen in /tmp/M3D_1.18.in
         CloudyInput: Input writen in /tmp/M3D_1.36.in
         CloudyInput: Input writen in /tmp/M3D_1.54.in
         CloudyInput: Input writen in /tmp/M3D_1.72.in
         CloudyInput: Input writen in /tmp/M3D_1.90.in

In [12]: pc.print_make_file(dir_ = dir_)
         pc.run_cloudy(dir_ = dir_, n_proc = 6, model_name = model_name, use_make = True)

run_cloudy: running: cd /tmp ; make -j 6 name="M3D_1"
         run_cloudy: ending: cd /tmp ; make -j 6 name="M3D_1"

In [12]: liste_of_models = pc.load_models('{0}/{1}'.format(dir_, model_name), list_elem=['H', 'He', 'C']
         read_cont = False, read_grains = False)

CloudyModel /tmp/M3D_1.36: Creating CloudyModel for /tmp/M3D_1.36
         CloudyModel /tmp/M3D_1.36: Be abundance not defined
         CloudyModel /tmp/M3D_1.36: /tmp/M3D_1.36.rad read
         CloudyModel /tmp/M3D_1.36: Number of zones: 180
         CloudyModel /tmp/M3D_1.36: /tmp/M3D_1.36.phy read
         CloudyModel /tmp/M3D_1.36: /tmp/M3D_1.36.ele_H read
         CloudyModel /tmp/M3D_1.36: filling H with 3 columns
         CloudyModel /tmp/M3D_1.36: /tmp/M3D_1.36.ele_He read
         CloudyModel /tmp/M3D_1.36: filling He with 3 columns
         CloudyModel /tmp/M3D_1.36: /tmp/M3D_1.36.ele_C read
         CloudyModel /tmp/M3D_1.36: filling C with 13 columns
         CloudyModel /tmp/M3D_1.36: /tmp/M3D_1.36.ele_N read
         CloudyModel /tmp/M3D_1.36: filling N with 8 columns
         CloudyModel /tmp/M3D_1.36: /tmp/M3D_1.36.ele_O read
         CloudyModel /tmp/M3D_1.36: filling O with 12 columns
         CloudyModel /tmp/M3D_1.36: /tmp/M3D_1.36.ele_Ar read
         CloudyModel /tmp/M3D_1.36: filling Ar with 19 columns
         CloudyModel /tmp/M3D_1.36: /tmp/M3D_1.36.ele_Ne read
         CloudyModel /tmp/M3D_1.36: filling Ne with 11 columns
         CloudyModel /tmp/M3D_1.36: /tmp/M3D_1.36.emis read
         CloudyModel /tmp/M3D_1.36: Number of emissivities: 9
         CloudyModel /tmp/M3D_1.18: Creating CloudyModel for /tmp/M3D_1.18
         CloudyModel /tmp/M3D_1.18: Be abundance not defined
         CloudyModel /tmp/M3D_1.18: /tmp/M3D_1.18.rad read
         CloudyModel /tmp/M3D_1.18: Number of zones: 180
         CloudyModel /tmp/M3D_1.18: /tmp/M3D_1.18.phy read
         CloudyModel /tmp/M3D_1.18: /tmp/M3D_1.18.ele_H read
         CloudyModel /tmp/M3D_1.18: filling H with 3 columns
         CloudyModel /tmp/M3D_1.18: /tmp/M3D_1.18.ele_He read
         CloudyModel /tmp/M3D_1.18: filling He with 3 columns
         CloudyModel /tmp/M3D_1.18: /tmp/M3D_1.18.ele_C read
         CloudyModel /tmp/M3D_1.18: filling C with 13 columns
         CloudyModel /tmp/M3D_1.18: /tmp/M3D_1.18.ele_N read

```

```

CloudyModel /tmp/M3D_1_18: filling N with 8 columns
CloudyModel /tmp/M3D_1_18: /tmp/M3D_1_18.ele_0 read
CloudyModel /tmp/M3D_1_18: filling 0 with 12 columns
CloudyModel /tmp/M3D_1_18: /tmp/M3D_1_18.ele_Ar read
CloudyModel /tmp/M3D_1_18: filling Ar with 19 columns
CloudyModel /tmp/M3D_1_18: /tmp/M3D_1_18.ele_Ne read
CloudyModel /tmp/M3D_1_18: filling Ne with 11 columns
CloudyModel /tmp/M3D_1_18: /tmp/M3D_1_18.emis read
CloudyModel /tmp/M3D_1_18: Number of emissivities: 9
CloudyModel /tmp/M3D_1_72: Creating CloudyModel for /tmp/M3D_1_72
CloudyModel /tmp/M3D_1_72: Be abundance not defined
CloudyModel /tmp/M3D_1_72: /tmp/M3D_1_72.rad read
CloudyModel /tmp/M3D_1_72: Number of zones: 177
CloudyModel /tmp/M3D_1_72: /tmp/M3D_1_72.phy read
CloudyModel /tmp/M3D_1_72: /tmp/M3D_1_72.ele_H read
CloudyModel /tmp/M3D_1_72: filling H with 3 columns
CloudyModel /tmp/M3D_1_72: /tmp/M3D_1_72.ele_He read
CloudyModel /tmp/M3D_1_72: filling He with 3 columns
CloudyModel /tmp/M3D_1_72: /tmp/M3D_1_72.ele_C read
CloudyModel /tmp/M3D_1_72: filling C with 13 columns
CloudyModel /tmp/M3D_1_72: /tmp/M3D_1_72.ele_N read
CloudyModel /tmp/M3D_1_72: filling N with 8 columns
CloudyModel /tmp/M3D_1_72: /tmp/M3D_1_72.ele_0 read
CloudyModel /tmp/M3D_1_72: filling 0 with 12 columns
CloudyModel /tmp/M3D_1_72: /tmp/M3D_1_72.ele_Ar read
CloudyModel /tmp/M3D_1_72: filling Ar with 19 columns
CloudyModel /tmp/M3D_1_72: /tmp/M3D_1_72.ele_Ne read
CloudyModel /tmp/M3D_1_72: filling Ne with 11 columns
CloudyModel /tmp/M3D_1_72: /tmp/M3D_1_72.emis read
CloudyModel /tmp/M3D_1_72: Number of emissivities: 9
CloudyModel /tmp/M3D_1_0: Creating CloudyModel for /tmp/M3D_1_0
CloudyModel /tmp/M3D_1_0: Be abundance not defined
CloudyModel /tmp/M3D_1_0: /tmp/M3D_1_0.rad read
CloudyModel /tmp/M3D_1_0: Number of zones: 181
CloudyModel /tmp/M3D_1_0: /tmp/M3D_1_0.phy read
CloudyModel /tmp/M3D_1_0: /tmp/M3D_1_0.ele_H read
CloudyModel /tmp/M3D_1_0: filling H with 3 columns
CloudyModel /tmp/M3D_1_0: /tmp/M3D_1_0.ele_He read
CloudyModel /tmp/M3D_1_0: filling He with 3 columns
CloudyModel /tmp/M3D_1_0: /tmp/M3D_1_0.ele_C read
CloudyModel /tmp/M3D_1_0: filling C with 13 columns
CloudyModel /tmp/M3D_1_0: /tmp/M3D_1_0.ele_N read
CloudyModel /tmp/M3D_1_0: filling N with 8 columns
CloudyModel /tmp/M3D_1_0: /tmp/M3D_1_0.ele_0 read
CloudyModel /tmp/M3D_1_0: filling 0 with 12 columns
CloudyModel /tmp/M3D_1_0: /tmp/M3D_1_0.ele_Ar read
CloudyModel /tmp/M3D_1_0: filling Ar with 19 columns
CloudyModel /tmp/M3D_1_0: /tmp/M3D_1_0.ele_Ne read
CloudyModel /tmp/M3D_1_0: filling Ne with 11 columns
CloudyModel /tmp/M3D_1_0: /tmp/M3D_1_0.emis read
CloudyModel /tmp/M3D_1_0: Number of emissivities: 9
CloudyModel /tmp/M3D_1_90: Creating CloudyModel for /tmp/M3D_1_90
CloudyModel /tmp/M3D_1_90: Be abundance not defined
CloudyModel /tmp/M3D_1_90: /tmp/M3D_1_90.rad read

```

```

CloudyModel /tmp/M3D_1_90: Number of zones: 176
CloudyModel /tmp/M3D_1_90: /tmp/M3D_1_90.phy read
CloudyModel /tmp/M3D_1_90: /tmp/M3D_1_90.ele.H read
CloudyModel /tmp/M3D_1_90: filling H with 3 columns
CloudyModel /tmp/M3D_1_90: /tmp/M3D_1_90.ele.He read
CloudyModel /tmp/M3D_1_90: filling He with 3 columns
CloudyModel /tmp/M3D_1_90: /tmp/M3D_1_90.ele.C read
CloudyModel /tmp/M3D_1_90: filling C with 13 columns
CloudyModel /tmp/M3D_1_90: /tmp/M3D_1_90.ele.N read
CloudyModel /tmp/M3D_1_90: filling N with 8 columns
CloudyModel /tmp/M3D_1_90: /tmp/M3D_1_90.ele.O read
CloudyModel /tmp/M3D_1_90: filling O with 12 columns
CloudyModel /tmp/M3D_1_90: /tmp/M3D_1_90.ele.Ar read
CloudyModel /tmp/M3D_1_90: filling Ar with 19 columns
CloudyModel /tmp/M3D_1_90: /tmp/M3D_1_90.ele.Ne read
CloudyModel /tmp/M3D_1_90: filling Ne with 11 columns
CloudyModel /tmp/M3D_1_90: /tmp/M3D_1_90.emis read
CloudyModel /tmp/M3D_1_90: Number of emissivities: 9
CloudyModel /tmp/M3D_1_54: Creating CloudyModel for /tmp/M3D_1_54
CloudyModel /tmp/M3D_1_54: Be abundance not defined
CloudyModel /tmp/M3D_1_54: /tmp/M3D_1_54.rad read
CloudyModel /tmp/M3D_1_54: Number of zones: 179
CloudyModel /tmp/M3D_1_54: /tmp/M3D_1_54.phy read
CloudyModel /tmp/M3D_1_54: /tmp/M3D_1_54.ele.H read
CloudyModel /tmp/M3D_1_54: filling H with 3 columns
CloudyModel /tmp/M3D_1_54: /tmp/M3D_1_54.ele.He read
CloudyModel /tmp/M3D_1_54: filling He with 3 columns
CloudyModel /tmp/M3D_1_54: /tmp/M3D_1_54.ele.C read
CloudyModel /tmp/M3D_1_54: filling C with 13 columns
CloudyModel /tmp/M3D_1_54: /tmp/M3D_1_54.ele.N read
CloudyModel /tmp/M3D_1_54: filling N with 8 columns
CloudyModel /tmp/M3D_1_54: /tmp/M3D_1_54.ele.O read
CloudyModel /tmp/M3D_1_54: filling O with 12 columns
CloudyModel /tmp/M3D_1_54: /tmp/M3D_1_54.ele.Ar read
CloudyModel /tmp/M3D_1_54: filling Ar with 19 columns
CloudyModel /tmp/M3D_1_54: /tmp/M3D_1_54.ele.Ne read
CloudyModel /tmp/M3D_1_54: filling Ne with 11 columns
CloudyModel /tmp/M3D_1_54: /tmp/M3D_1_54.emis read
CloudyModel /tmp/M3D_1_54: Number of emissivities: 9
load_models: 6 models read

```

```
In [13]: m3d = pc.C3D(liste_of_models, dims = [dim, dim, dim], angles = [45,45,0], plan_sym = True)
```

```
C3D: Entering C3D
```

```
  CubCoord: building a cube of 101x101x101
```

```
  CubCoord: Rotation matrix by 45.0, 45.0, 0.0 degrees.
```

```
  C3D: CubCoord done.
```

```
  C3D: interp.bi done.
```

```
  C3D: Interpolation mesh done
```

```
  C3D: All 3D values reset
```


```
In [14]: def_profiles(m3d)
```

```
In [15]: plt.figure(figsize=(10,10))
         plot_profiles(m3d, 55, 55)
```

```

C3D: get_emis(0) interpolated using numpy-method
C3D: te interpolated using numpy-method
C3D: line H__1_486136A : profile computed on axis x
C3D: get_emis(3) interpolated using numpy-method
C3D: line N__2_658345A : profile computed on axis x
C3D: get_emis(7) interpolated using numpy-method
C3D: line O__3_500684A : profile computed on axis x

```

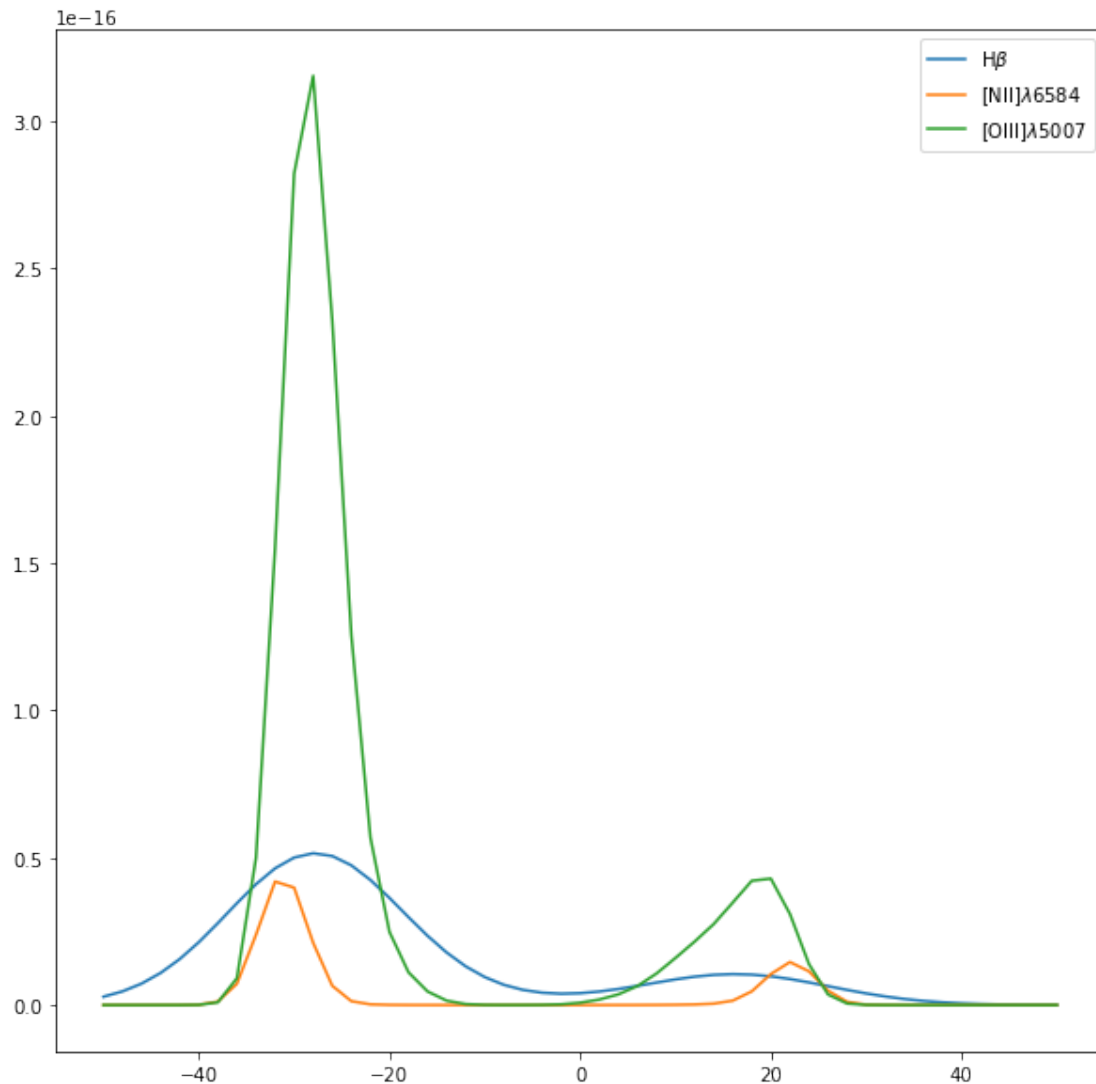

```

In [16]: plt.figure(figsize=(10,10))
          plot_profiles(m3d, 55, 55)
          def_profiles_user(m3d)
          plt.plot(m3d.vel_tab,m3d.get_profile('H__1_486136A', axis='x')[:,55,55] * 5, ':b', label = r'H

```


/home/morisset/anaconda2/envs/py3k6/lib/python3.6/site-packages/ipykernel\_launcher.py:17: RuntimeWarning

```

C3D: line H__1_486136A : profile computed on axis x

```

Out[16]: [<matplotlib.lines.Line2D at 0x7f02c4a4a2e8>]

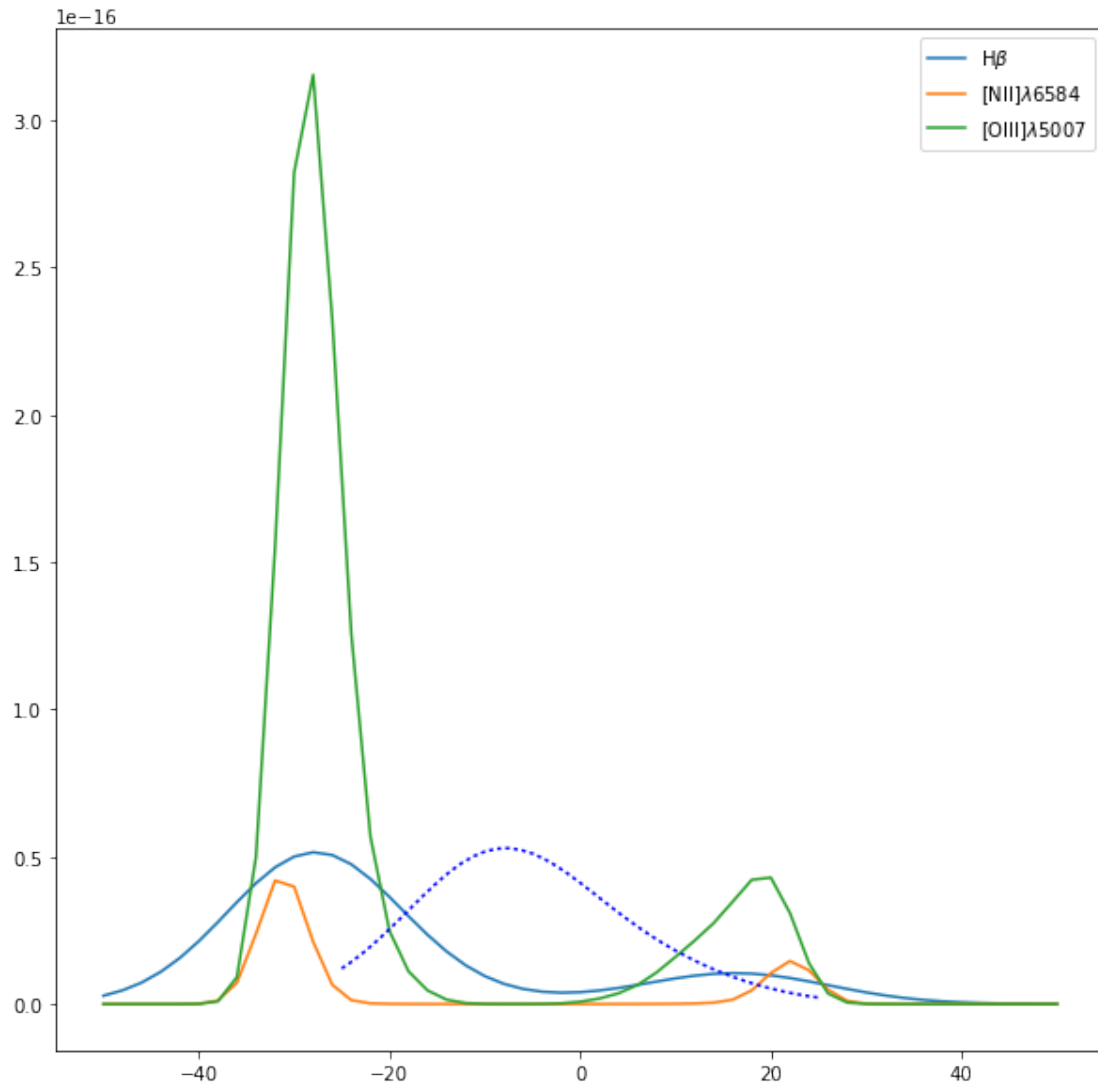

```
In [17]: plt.figure(figsize=(15,15))
         other_plots(m3d, proj_axis)
```

/home/morisset/anaconda2/envs/py3k6/lib/python3.6/site-packages/ipykernel\_launcher.py:18: RuntimeWarning

/home/morisset/anaconda2/envs/py3k6/lib/python3.6/site-packages/ipykernel\_launcher.py:23: RuntimeWarning

C3D: get\_ionic('O', 1) interpolated using numpy-method

C3D: get\_ionic('N', 1) interpolated using numpy-method

/home/morisset/anaconda2/envs/py3k6/lib/python3.6/site-packages/ipykernel\_launcher.py:33: RuntimeWarning


/home/morisset/anaconda2/envs/py3k6/lib/python3.6/site-packages/ipykernel\_launcher.py:41: RuntimeWarning

/home/morisset/anaconda2/envs/py3k6/lib/python3.6/site-packages/ipykernel\_launcher.py:49: RuntimeWarning

/home/morisset/anaconda2/envs/py3k6/lib/python3.6/site-packages/ipykernel\_launcher.py:54: RuntimeWarning


C3D: get\_ionic('N', 2) interpolated using numpy-method



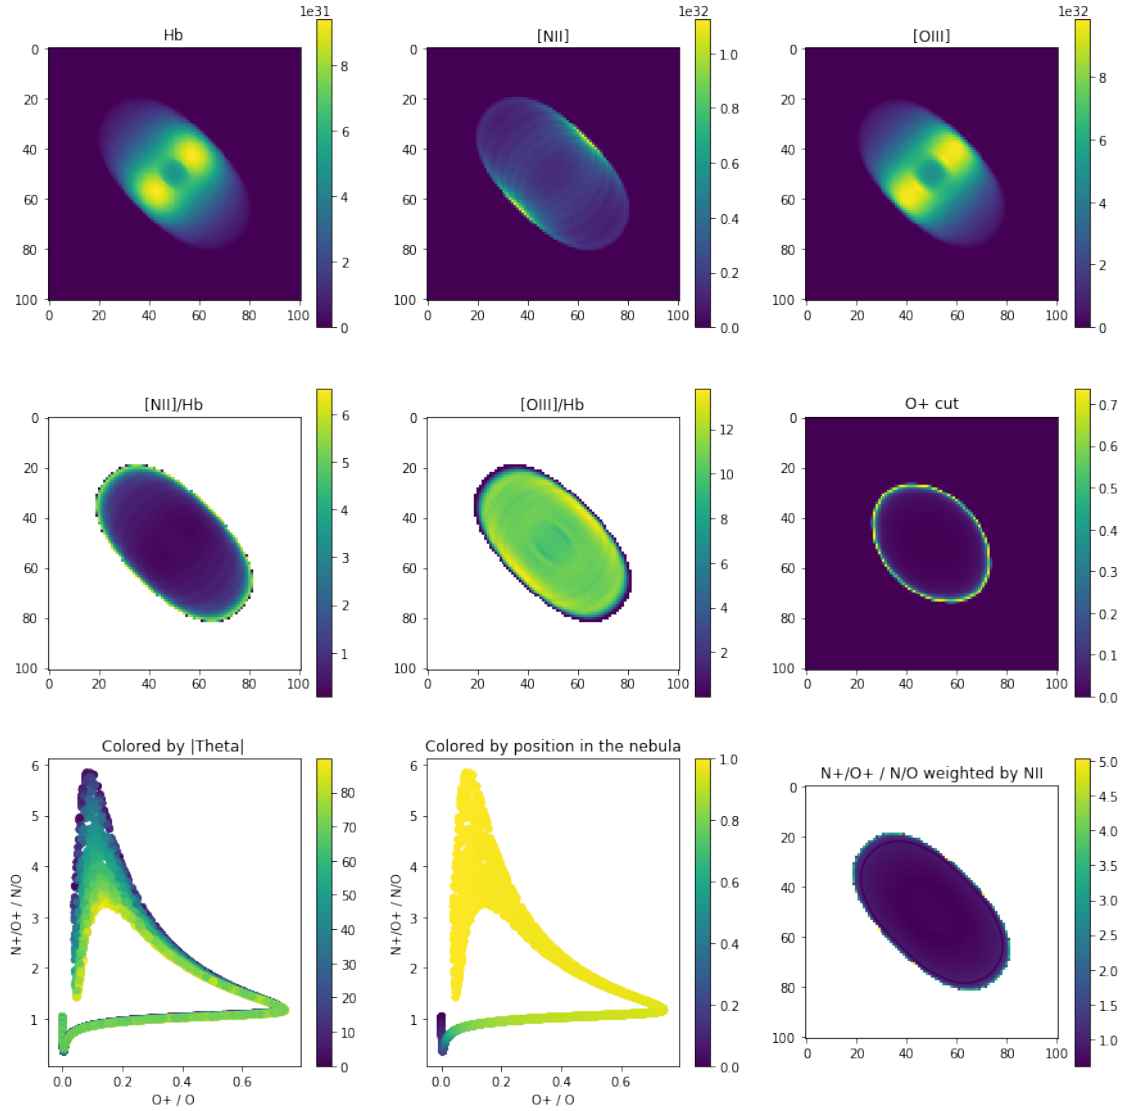

```
In [18]: im = m3d.get_RGB(list_emis = [0, 3, 7])
plt.figure(1, figsize=(10,10))
plt.imshow(im)
```


```
Out[18]: <matplotlib.image.AxesImage at 0x7f02c25bc0f0>
```

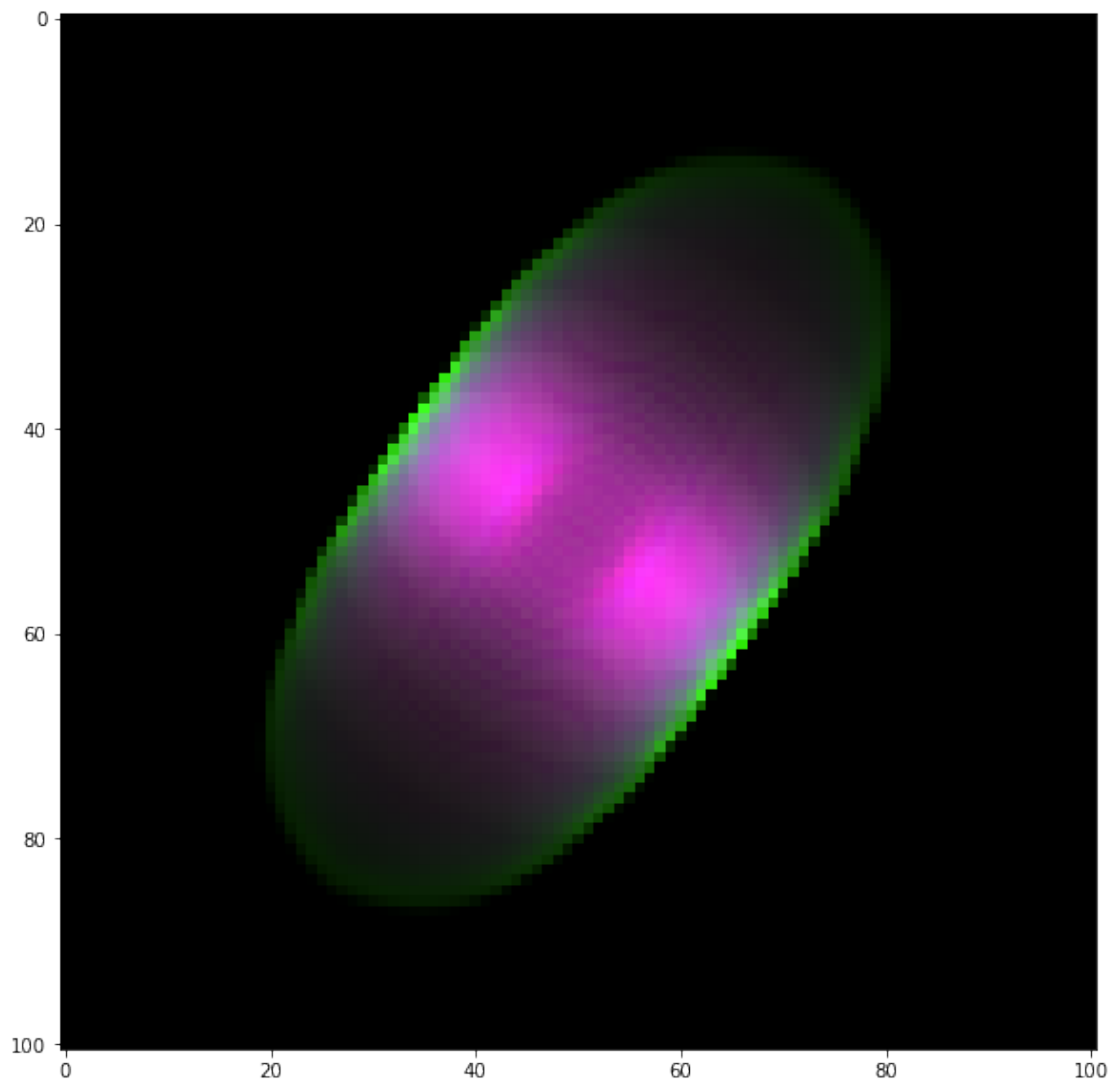

```
In [19]: im = m3d.get_RGB(list_emis = [0, 3, 7])
plt.figure(1, figsize=(15,15))
plt.imshow(im)
m3d.plot_profiles(ref = 3, i_fig = 1, Nx=20, Ny=20)
```

C3D: line N\_2.658345A : profile computed on axis x

```
/home/morisset/anaconda2/envs/py3k6/lib/python3.6/site-packages/pyCloudy/c3d/model_3d.py:943: RuntimeWarning:
  prof /= np.max(prof)
```

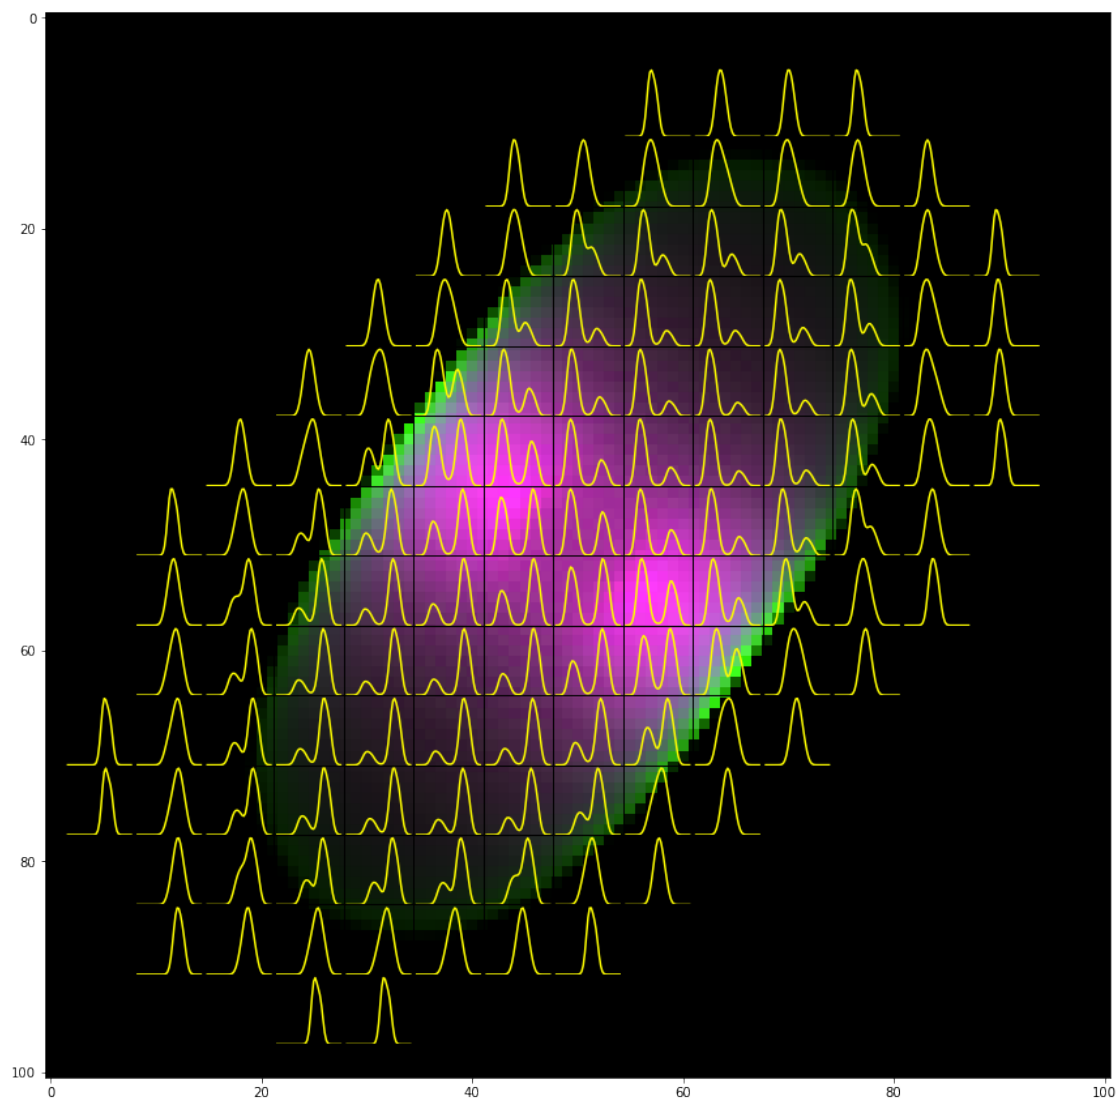

In [ ]: