


A screenshot of a code editor window displaying a CSS file named `# assignment31[1].css`. The code defines a grid layout for a page with three items: .item-1, .item-2, and .item-3.

```
1  {
2      padding:0%;
3      margin:0%;
4  }
5  body{
6      display:flex;
7      justify-content:center;
8      align-items:center;
9      background-color: #white;
10     height:100vh;
11 }
12 .container{
13     display:grid;
14     grid-template-columns:1fr 1fr 1fr;
15     gap:3px;
16     background-color: #white;
17     width:80vh;
18 }
19 .grid-item{
20     display:flex;
21     text-align:center;
22     color: #white;
23     padding:20px;
24     justify-content: center;
25 }
26 .item-1{
27     grid-column:1/2;
28     background-color: #blue;
29 }
30 .item-2{
31     grid-column:2/3;
32     background-color: #orangered;
33 }
34 .item-3{
35     grid-column:3/4;
36     background-color: #navy;
```

The editor interface includes a toolbar with icons for file operations, a search bar, and a status bar at the bottom showing file details like "Line 1, Col 1" and "Spaces: 4".

1	2	3
4	5	6
7	8	9

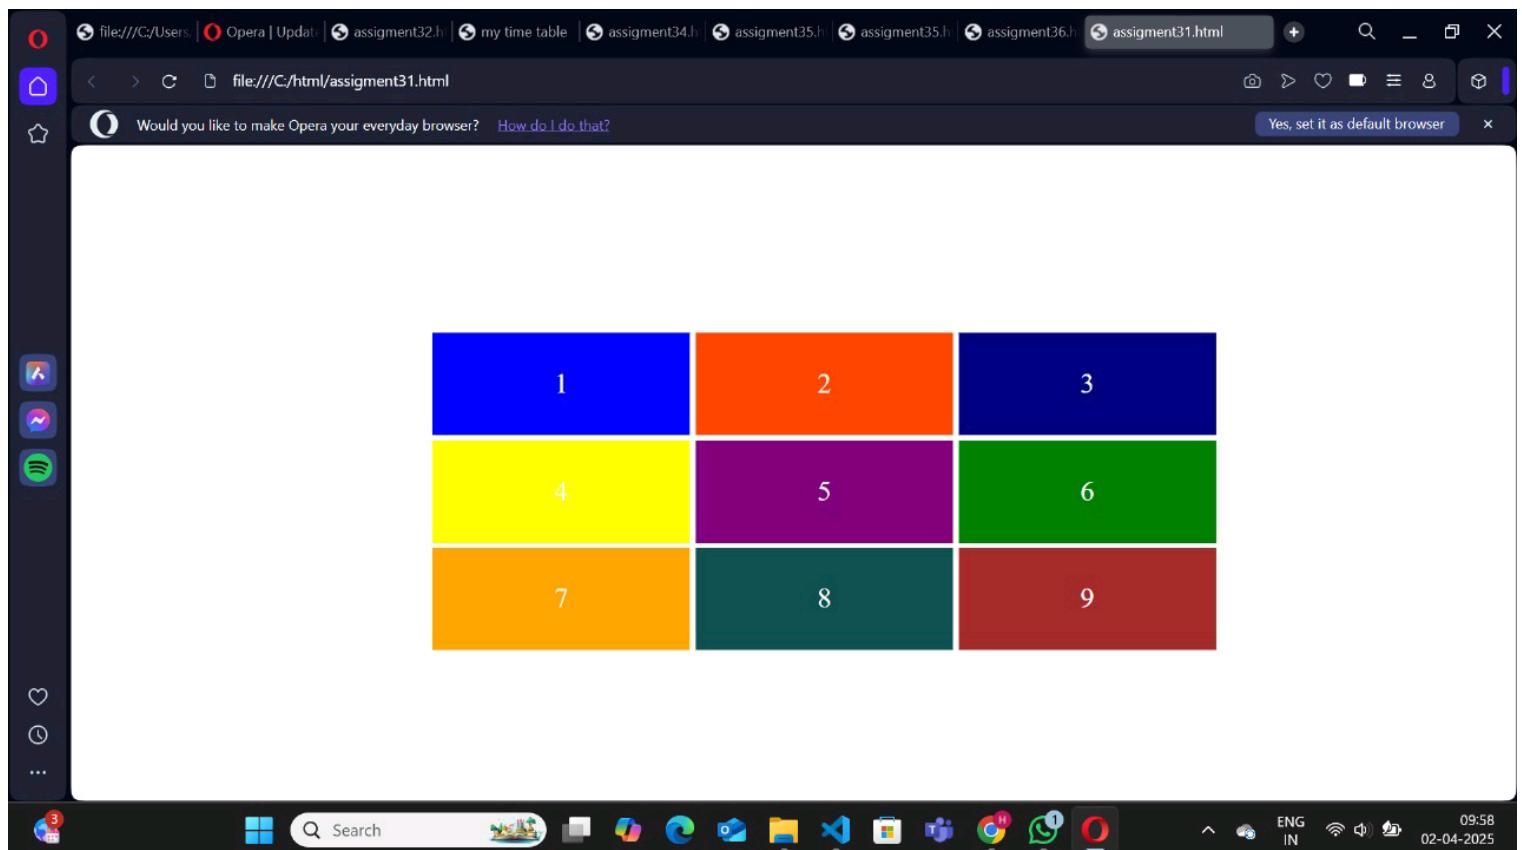

Screenshot of a code editor showing an HTML file named "assigment32.html". The code defines a table with 5 rows and 7 columns. Rows 1-4 represent days of the week (FRIDAY, SATURDAY) with varying numbers of sub-tables (2, 3, 2, 2). Row 5 is a header row with a colspan of 3. The code includes several IDs for specific table cells.

```
<html>
<body>
<table>
<tr>
<td id="sub2">SUB2</td>
<td colspan="2">LIBRARY</td>
</tr>
<tr>
<td>FRIDAY</td>
<td id="sub1">SUB1</td>
<td id="sub2">SUB2</td>
<td id="sub3">SUB3</td>
<td>---</td>
<td id="sub4">SUB4</td>
<td id="sub5">SUB5</td>
<td colspan="2">LIBRARY</td>
</tr>
<tr>
<td>SATURDAY</td>
<td id="sub1">SUB1</td>
<th colspan="3">SEMINAR</th>
<td id="sub4">SUB4</td>
<td id="sub5">SUB5</td>
<td colspan="2">LIBRARY</td>
</tr>
</table>
</body>
</html>
```

File Edit Selection View ... ← → ⌂ html

jsassi.html • assignment33.html

assignment33.html > html > head > style > table > th > td

```
1  <html>
2    <head>
3      <title>my time table</title>
4      <style>
5        table,th,td{
6          border: 0.1px solid black;
7        }
8      </style>
9    </head>
10   <body>
11     <h2>My Time Table</h2>
12     <table>
13       <tr>
14         <th rowspan="2">Day</th>
15         <th colspan="3">Session</th>
16       </tr>
17       <tr>
18         <th>Schedule</th>
19         <th colspan="2">Course Name</th>
20       </tr>
21       <tr>
22         <td>Sunday</td>
23         <td>16:00-16:50</td>
24         <td>Web Technology</td>
25       </tr>
26       <tr>
27         <td>Sunday</td>
28         <td>17:00-17:50</td>
29         <td>Network Management</td>
30       </tr>
31       <tr>
32         <td>Monday</td>
33         <td>18:00-18:50</td>
34         <td>IT Project Management</td>
35       </tr>
36     </table>
```

Line 6 Col 39 Spaces: 4 UTF-8 CRLF {} HTML ⌂ 10:03  
ENG IN 02-04-2025

file:///C:/Us Opera | Up | assigment my time tal assigment assigment assigment assigment assigment assigment my time table

file:///C:/html/assigment33.html

Would you like to make Opera your everyday browser? [How do I do that?](#)

Yes, set it as default browser

## My Time Table

Day	Session	
	Schedule	Course Name
Sunday	16:00-16:50	Web Technology
Sunday	17:00-17:50	Network Management
Monday	18:00-18:50	IT Project Management

10:04  
ENG IN WiFi 02-04-2025

A screenshot of a Windows desktop environment. The main focus is a code editor window titled "assigment31.html". The file path "assigment31.html" is highlighted in the title bar. The code editor displays the following HTML structure:

```
1 <html>
2   <head>
3     <link rel="stylesheet" href="assigment31.css">
4   </head>
5   <body>
6     <div class="container">
7       <div class="grid-item item-1">1</div>
8       <div class="grid-item item-2">2</div>
9       <div class="grid-item item-3">3</div>
10      <div class="grid-item item-4">4</div>
11      <div class="grid-item item-5">5</div>
12      <div class="grid-item item-6">6</div>
13      <div class="grid-item item-7">7</div>
14      <div class="grid-item item-8">8</div>
15      <div class="grid-item item-9">9</div>
16
17    </div>
18  </body>
19 </html>
```

The code editor interface includes a toolbar with icons for file operations, a search bar, and status bars at the bottom indicating file paths, line numbers, and system status.

A screenshot of a Windows operating system desktop. In the center is a code editor window titled "assignment31[1].css". The file path shown in the title bar is "C:\Users\dell\AppData\Local\Microsoft\Windows\INetCache\IE>83XQFSSC># assignment31[1].css". The code editor displays the following CSS code:

```
33 }
34 .item-3{
35     grid-column:3/4;
36     background-color:#navy;
37 }
38 .item-4{
39     grid-column:1/2;
40     background-color:#yellow;
41 }
42 .item-5{
43     grid-column:2/3;
44     background-color:#purple;
45 }
46 .item-6{
47     grid-column:3/4;
48     background-color:#green;
49 }
50 .item-7{
51     grid-column:1/2;
52     background-color:#orange;
53 }
54 .item-8{
55     grid-column:2/3;
56     background-color:#rgb(14, 79, 79);
57 }
58 .item-9{
59     grid-column:3/4;
60     background-color:#brown;
61 }
62 @media(max-width:658px){
63     .grid-item{
64         background-color:#aqua;
65     }
66 }
```

The status bar at the bottom of the code editor shows "Ln 1, Col 1" and "Spaces: 4". To the right of the status bar are icons for search, file, and other software like Microsoft Edge and File Explorer. The taskbar at the bottom of the screen also has icons for Microsoft Edge, File Explorer, and other applications. The system tray shows the date and time as "02-04-2025 09:57".

```
File Edit Selection View ... ← → ⌂ html ⌂ jsassi.html ⌂ assigment32.html ✎
assignment32.html > html > body > table > h2 > br
1  <html>
2    <head>
3      <link rel="stylesheet" href="assigment32.css">
4    </head>
5    <body>
6
7      <table>
8        <tr><td colspan="1"></td>
9          <td>8:30-9:30</td>
10         <td>9:30-10:30</td>
11         <td>10:30-11:30</td>
12         <td>11:30-12:30</td>
13         <td>12:30-2:00</td>
14         <td>2:00-3:00</td>
15         <td>3:00-4:00</td>
16         <td colspan="2">4:00-5:00</td>
17       </tr>
18       <tr>
19         <td>MONDAY</td>
20         <td>---</td>
21         <td id="sub1">SUB1</td>
22         <td id="sub2">SUB2</td>
23         <td id="sub3">SUB3</td>
24         <td rowspan="2">L<br>U<br>N<br>C<br>H</td>
25         <td id="sub4">SUB4</td>
26         <td id="sub5">SUB5</td>
27         <th colspan="2">COUNSELLING CLASS</th>
28       </tr>
29       <tr>
30         <td>TUESDAY</td>
31         <td id="sub1">SUB1</td>
32         <td id="sub2">SUB2</td>
33         <td id="sub3">SUB3</td>
34         <td>---</td>
35       </tr>
36     </table>
```

Line 8, Col 21 Spaces: 4 UTF-8 CRLF {} HTML ⌂ 10:00  
ENG IN 02-04-2025

Screenshot of a code editor showing an HTML file named "assignment32.html". The code defines a table with four rows, each representing a day of the week (TUESDAY, WEDNESDAY, THURSDAY, FRIDAY). Each row contains four columns: the day name, three subject codes (SUB1, SUB2, SUB3), and a library slot. A 'LIBRARY' column is present in the first three rows, while the fourth row has a colspan="2" attribute.

```
<html>
<body>
<table>
<tr>
<td>TUESDAY</td>
<td id="sub1">SUB1</td>
<td id="sub2">SUB2</td>
<td id="sub3">SUB3</td>
<td>---</td>
<td id="sub2">SUB2</td>
<td id="sub2">SUB2</td>
<td colspan="2">LIBRARY</td>
</tr>
<tr>
<td>WEDNESDAY</td>
<td id="sub1">SUB1</td>
<td id="sub2">SUB2</td>
<td id="swai">SWA</td>
<td>---</td>
<th colspan="4">LAB</th>
</tr>
<tr>
<td>THURSDAY</td>
<td id="sub1">SUB1</td>
<td id="sub2">SUB2</td>
<td id="sub3">SUB3</td>
<td>---</td>
<td id="sub2">SUB2</td>
<td id="sub2">SUB2</td>
<td colspan="2">LIBRARY</td>
</tr>
<tr>
<td>FRIDAY</td>
```

The screenshot shows a code editor window with the following CSS code:

```
# assignment32.css > #sub3
1  table,th,td{
2    border: 1px solid black;
3    text-align: center;
4    margin: 20px 180px;
5    padding: 3px;
6  }
7  h2{
8    text-align: center;
9  }
10 #sub1{
11   color: blue;
12   font-weight: bold;
13 }
14 #sub2{
15   color: orange;
16   font-weight: bold;
17 }
18 #sub3{
19   color: purple;
20   font-weight: bold;
21 }
22 #sub4{
23   color: green;
24   font-weight: bold;
25 }
26 #sub5{
27   color: red;
28   font-weight: bold;
29 }
30 #swal1{
31   color: red;
32   font-weight: bold;
33 }
34 }
```

The code defines a table with borders and padding, and five CSS classes (#sub1 to #sub5) that set colors and font weights. Additionally, there is a class #swal1 with a red color and bold font weight.

	8:30-9:30	9:30-10:30	10:30-11:30	11:30-12:30	12:30-2:00	2:00-3:00	3:00-4:00	4:00-5:00
MONDAY	---	SUB1	SUB2	SUB3	L U N C H	SUB4	SUB5	COUNSELLING CLASS
TUESDAY	SUB1	SUB2	SUB3	---		SUB2	SUB2	LIBRARY
WEDNESDAY	SUB1	SUB2	SWA	---		LAB		
THURSDAY	SUB1	SUB2	SUB3	---		SUB2	SUB2	LIBRARY
FRIDAY	SUB1	SUB2	SUB3	---		SUB4	SUB5	LIBRARY
SATURDAY	SUB1	SEMINAR				SUB4	SUB5	LIBRARY

## COLLEGE TIME TABLE



Search



10:02  
IN 02-04-2025



File Edit Selection View ... ← → 🔍 html 🌐

EXPLORER

HTML

.vscode

html

assignment4.html

assignment4.txt

# assignment31.css

assignment31.html

# assignment32.css

assignment32.html

assignment33.html

# assignment34.css

assignment34.html

# assignment35.css

assignment35.html

# assignment36.css

assignment36.html

assignmentq1.html

assignmentq2.html

assignmentq3.html

assignmentq5.html

# card.css

card.html

download1.png

download2.png

download3.png.jpeg

# grid.css

grid1.html

# grid2.css

grid2.html

# grid3.css

> OUTLINE

> TIMELINE

jsassi.html

assignment34.html


```
<html>
  <head>
    <link rel="stylesheet" href="assignment34.css">
  </head>
  <body>
    <div class="box">Centered Box</div>
  </body>
</html>
```


Ln 6, Col 44 Spaces: 4 UTF-8 CRLF HTML 🔍 10:04 02-04-2025

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The left sidebar displays a file tree with various HTML and CSS files, including 'assigment34.css' which is currently selected. The main editor area shows the following CSS code:

```
body{  
    display: flex;  
    justify-content: center;  
    align-items: center;  
    height: 100vh;  
    margin: 0;  
    background-color: palevioletred;  
}  
.box{  
    width: 200px;  
    height: 200px;  
    background-color: blue;  
    color: white;  
    display: flex;  
    justify-content: center;  
    align-items: center;  
    font-size: 20px;  
    font-weight: bold;  
    border-radius: 10px;  
}
```

The status bar at the bottom right indicates the current file is 'assigment34.css', with line 7, column 44, spaces: 4, and encoding: UTF-8. The date and time shown are 02-04-2025 and 10:04.

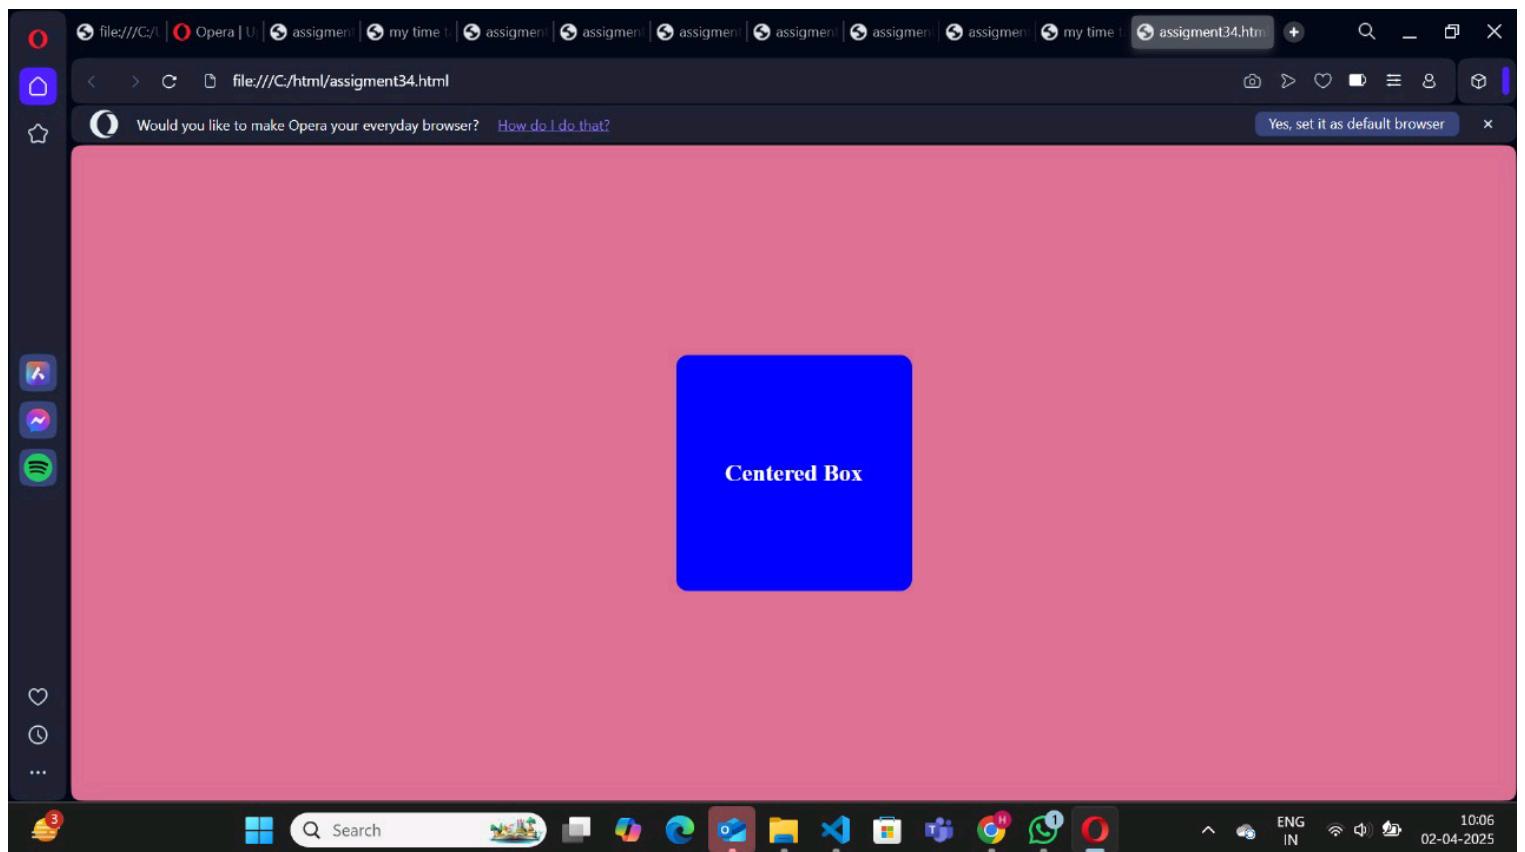


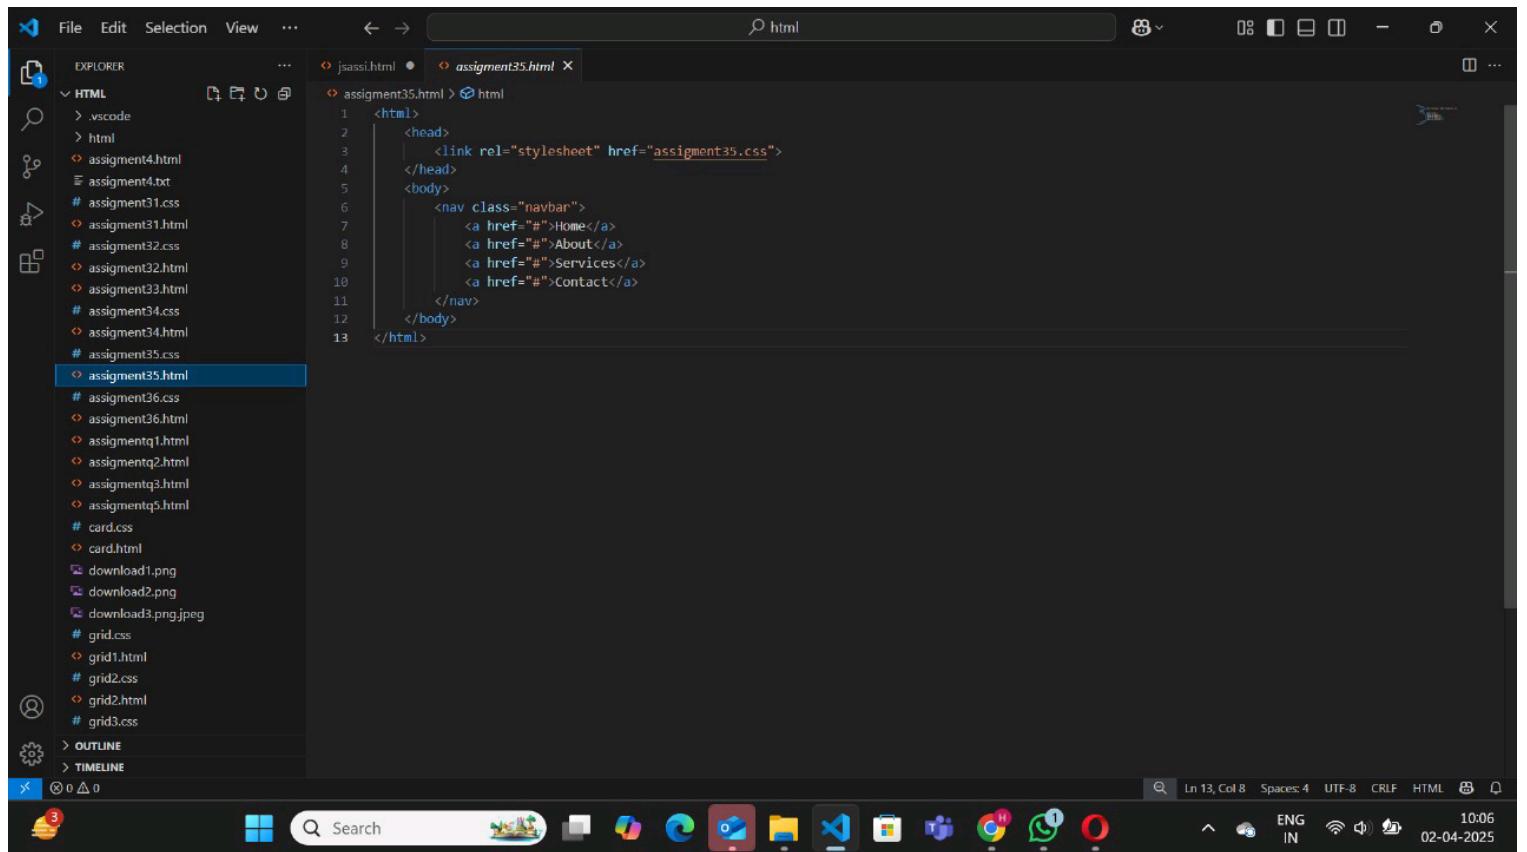

The screenshot shows the Microsoft Visual Studio Code (VS Code) interface. The top menu bar includes File, Edit, Selection, View, and other standard options. The title bar displays the file name "assigment35.html". The left sidebar (Explorer) lists various files and folders, with "assigment35.html" selected and highlighted in blue. The main editor area shows the following HTML code:

```
<html>
  <head>
    <link rel="stylesheet" href="assigment35.css">
  </head>
  <body>
    <nav class="navbar">
      <a href="#">Home</a>
      <a href="#">About</a>
      <a href="#">Services</a>
      <a href="#">Contact</a>
    </nav>
  </body>
</html>
```


The status bar at the bottom provides information about the current file: Line 13, Column 8, Spaces: 4, UTF-8, CRLF, HTML, and a timestamp of 10:06 02-04-2025. The taskbar at the bottom of the screen shows icons for various Windows applications like File Explorer, Task View, and the Start button.

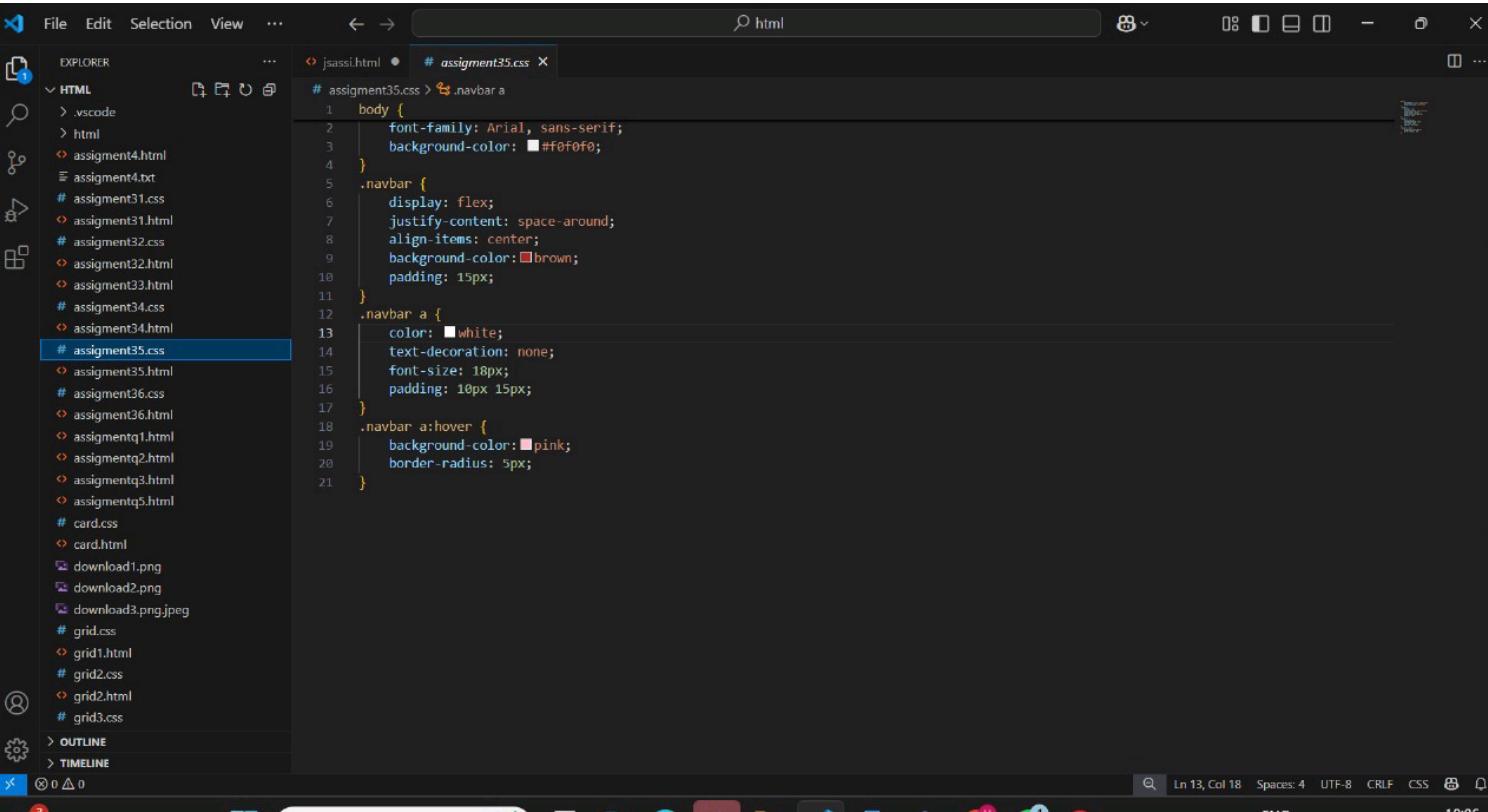

A screenshot of the Microsoft Edge browser window. The address bar shows the URL `html`. The developer tools are open, displaying the CSS file `jsassi.html` under the `# assignment35.css` tab. The code editor shows the following CSS:

```
body {
    font-family: Arial, sans-serif;
    background-color: #f0f0f0;
}
.navbar {
    display: flex;
    justify-content: space-around;
    align-items: center;
    background-color: brown;
    padding: 15px;
}
.navbar a {
    color: white;
    text-decoration: none;
    font-size: 18px;
    padding: 10px 15px;
}
.navbar a:hover {
    background-color: pink;
    border-radius: 5px;
}
```

The browser interface includes a navigation bar with back, forward, and search buttons, as well as a status bar at the bottom showing the date and time.

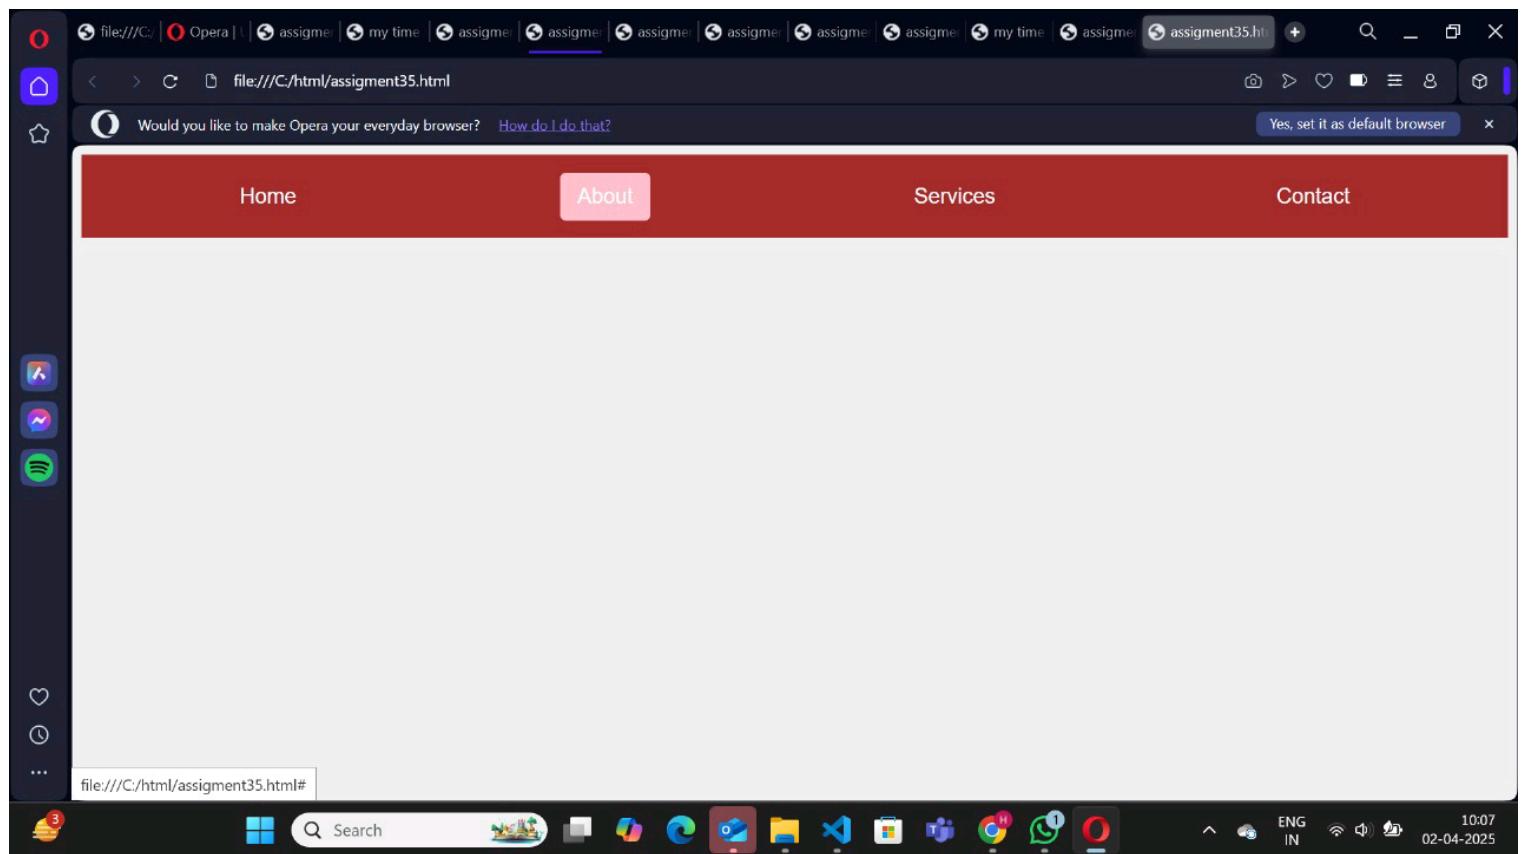

A screenshot of the Visual Studio Code (VS Code) interface showing an HTML file named "assigment36.html". The code displays three cards, each with an image, a title, and a description.

```
<html>
  <head>
    <link rel="stylesheet" href="assigment36.css">
  </head>
  <body>
    <div class="card">
      <img src=download1.png>
      <div class="card-content">
        <div class="card-title">card-1</div>
        <div class="card-description">A cute dog is a bundle of joy wrapped in soft fur, with big, soulful eyes that melt hearts.</div>
      </div>
    </div>
    <div class="card">
      <img src=download2.png>
      <div class="card-content">
        <div class="card-title">card-2</div>
        <div class="card-description">A flower is nature's delicate masterpiece, blooming in a dazzling array of colors, shapes,</div>
      </div>
    </div>
    <div class="card">
      <img src=download3.jpeg>
      <div class="card-content">
        <div class="card-title">card-3</div>
        <div class="card-description">A cute doll is a tiny bundle of charm, with rosy cheeks, sparkling eyes, and a sweet little</div>
      </div>
    </div>
  </body>
</html>
```

The Explorer sidebar on the left shows a folder structure with files like ".vscode", "html", "assigment4.html", "assigment31.css", "assigment31.html", "assigment32.css", "assigment32.html", "assigment33.html", "assigment34.css", "assigment34.html", "assigment35.css", "assigment35.html", "assigment36.css", "assigment36.html", "assigmentq1.html", "assigmentq2.html", "assigmentq3.html", "assigmentq5.html", "# card.css", "card.html", "download1.png", "download2.png", "download3.png.jpeg", "# grid.css", "grid1.html", "grid2.css", "grid2.html", "# grid3.css", "OUTLINE", and "TIMELINE".

The bottom status bar shows "Ln 30, Col 8" and "Spaces: 4" and "UTF-8" and "CRLF". It also displays the date and time "02-04-2025" and "10:08".

A screenshot of the Microsoft Visual Studio Code (VS Code) interface. The window title is "File Edit Selection View ...". The Explorer sidebar on the left shows a file tree with various HTML and CSS files, including "assignment36.css" which is currently selected. The main editor area displays the CSS code for "assignment36.css". The code defines a card component with styling for the body, .card, .card img, .card-content, .card-title, and .card-description. The Taskbar at the bottom includes icons for File Explorer, Task Manager, Task View, Start, Search, Taskbar settings, and several pinned application icons like Edge, File Explorer, Task View, Taskbar settings, and a few others.

```
# assignment36.css > ...
1  *{
2    box-sizing: border-box;
3  }
4  body{
5    margin: 0;
6    padding: 20px;
7    font-family: arial;
8    display: flex;
9    justify-content: center;
10   gap: 20px;
11   border-radius: 10px;
12   background-color: #biscuit;
13 }
14 .card{
15   max-width: 300px;
16   background-color: #white;
17   border-radius: 10px;
18 }
19 .card img{
20   width: 100%;
21   height: 300px;
22   object-fit: cover;
23   border-radius: 10px;
24 }
25 .card-content{
26   padding: 16px;
27   text-align: center;
28 }
29 .card-title{
30   font-size: 28px;
31   font-weight: bold;
32   margin-bottom: 8px;
33 }
34 .card-description{
35   color: #black;
36   font-size: 15px;
37 }
```

