

Reacting to events

Computers receive a signal when a key is pressed or a mouse is moved. This is called an “event”. Programs can instruct the computer to respond to any events it detects.

SEE ALSO

◀ 158–159 Making shapes

◀ 160–161 Changing things


Event names

Lots of different events can be triggered using input devices like a mouse or keyboard. Tkinter has names to describe each of these events.




Mouse events

Keyboard events

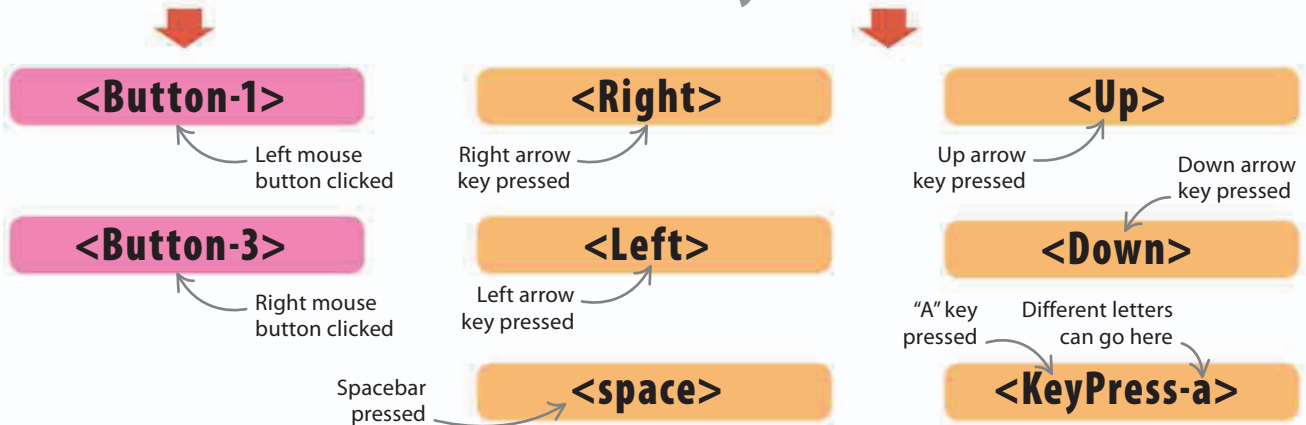

Mouse events

To make a program respond to mouse events, simply link (or bind) a function to an event. Here, the function “burp” is created, then bound to the “<Button-1>” event.

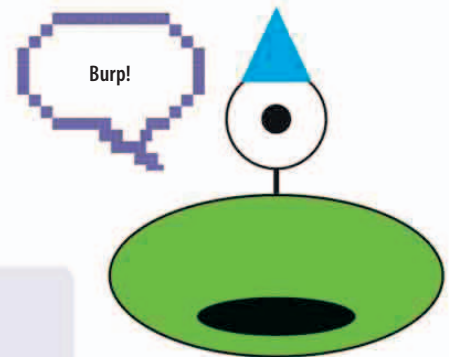

△ Burping alien

Click the left mouse button and the alien lets out a burp. This is because the “burp” function has been used.

```

window.attributes('-topmost', 1)
def burp(event):
    mouth_open()
    c.itemconfig(words, text='Burp!')
c.bind_all('<Button-1>', burp)

```

This brings the Tkinter window to the front of your screen

Creates a function called “burp”

Links the left mouse click to the “burp” function