

Events

The brown “Events” blocks in Scratch start scripts when certain things happen. For example, when the user presses a key, clicks a sprite, or uses a webcam or microphone.


SEE ALSO

Sensing **66–67** ›
and detecting

Sending **70–71** ›
messages

Clicking

A script can be added to a sprite that makes it do something if the sprite is clicked while the program is running. Experiment with different blocks to see what a sprite can do when clicked.

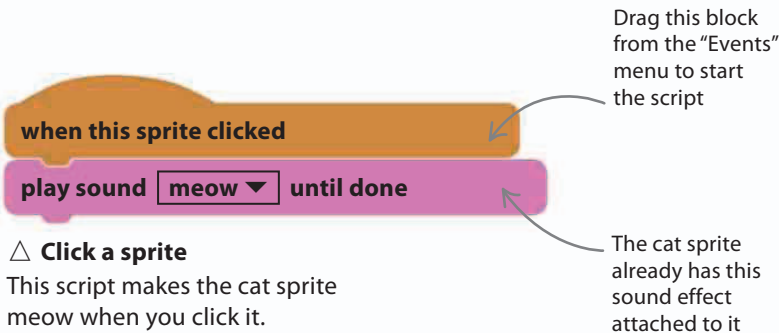

Key presses

Programs can be built to react when different keys on the keyboard are pressed. For another way of using the keyboard that’s better for creating games, see pages 66–67.

