

EXPERT TIPS


Comparing words

The “=” block is not just used for numbers; it can also be used to check whether two strings are the same. It ignores capital letters when comparing strings.

set **name** to **Lizzie**

△ Create a variable

To experiment with comparing strings, create a new variable called “name” and set its value to “Lizzie”.

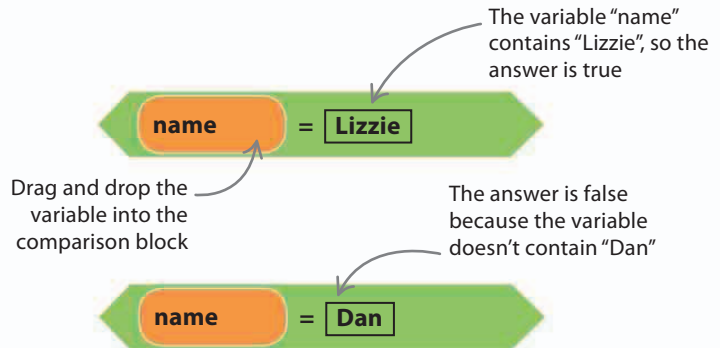


Not!

The “not” block can simplify things by reversing the answer of a Boolean expression. For example, it’s easier to check if someone’s age is not 10 than to check every other possible age.




◁ The “not” block

The “not” block changes the answer around, from true to false and from false to true.



△ Without the “not” block

Here, 10 isn’t equal to 7, so the answer is false.




△ With the “not” block

Adding the “not” block to the same question changes the answer. Because 7 does not equal 10, the answer is now true.

Combining questions

To ask more complicated questions, you can combine comparison blocks and ask more than one question at the same time.



△ Comparison blocks

The “or” and “and” blocks are used to combine Boolean expressions in different ways.



Here, the answer is true when either the left or the right side is true

The answer here is only true when both the left and right sides are true



◁ In practice

The top block checks whether someone is younger than 18 or older than 65. The bottom block checks if they are aged 11, 12, 13, or 14.