


Decisions and branches

Tests of whether something is true or false can be used to tell the computer what to do next. It will perform a different action depending on whether the answer is true or false.


Making decisions

The “if” blocks use Boolean expressions to decide what to do next. To use them, put other blocks inside their “jaws”. The blocks inside the “if” blocks will only run if the answer to the Boolean expression is true.

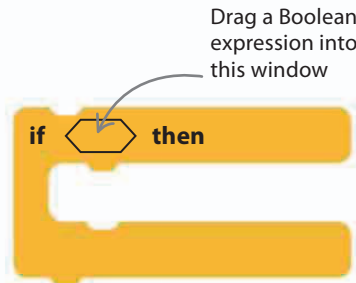

△ “if-then” block

If a Boolean expression is true, the blocks between the “if-then” block’s jaws will run.

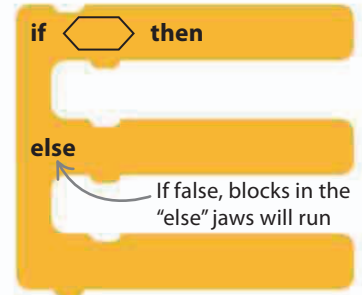

△ “if-then-else” block

If the Boolean expression is true, the first set of blocks runs. If not, the second set runs.


SEE ALSO

◀ 62–63 True or false?

Sensing and 66–67 > detecting

Using the “if-then” block


The “if-then” block lets you choose whether or not to run part of a script depending on the answer to a Boolean expression. Attach this script to the cat sprite to try it out.

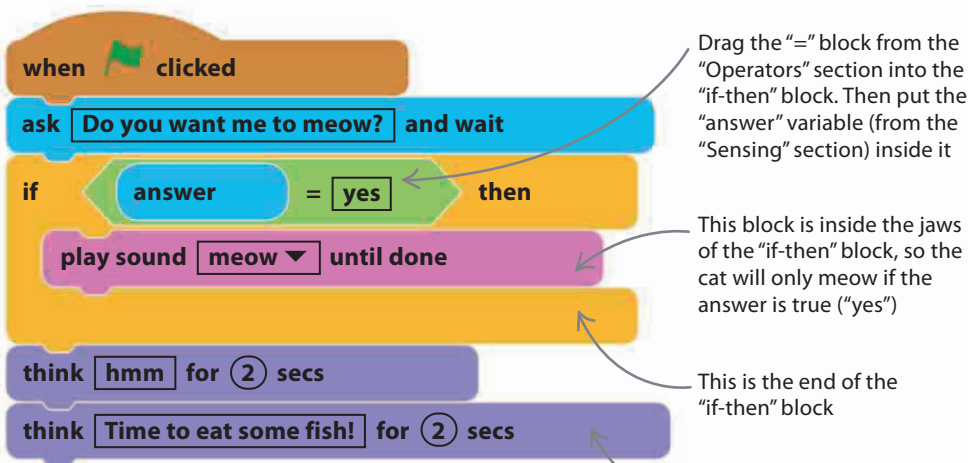

△ Meowing cat

This program checks the Boolean expression and will only run the part between the “if-then” block’s jaws if it is true. This means that the cat only meows when you tell it to.

Is answer yes?



△ How it works

The program checks whether the Boolean expression is true. If it is, it runs the blocks inside the “if-then” block’s jaws.