


Complex loops

Simple loops are used to repeat parts of a program forever, or a certain number of times. Other, cleverer loops can be used to write programs that decide exactly when to repeat instructions.

Looping until something happens

Add the “Dog1” sprite to a project, and then give the below script to the cat sprite. When you run the script, the “repeat until” block makes sure the cat keeps moving until it touches the dog. It will then stop and say “Ouch!”

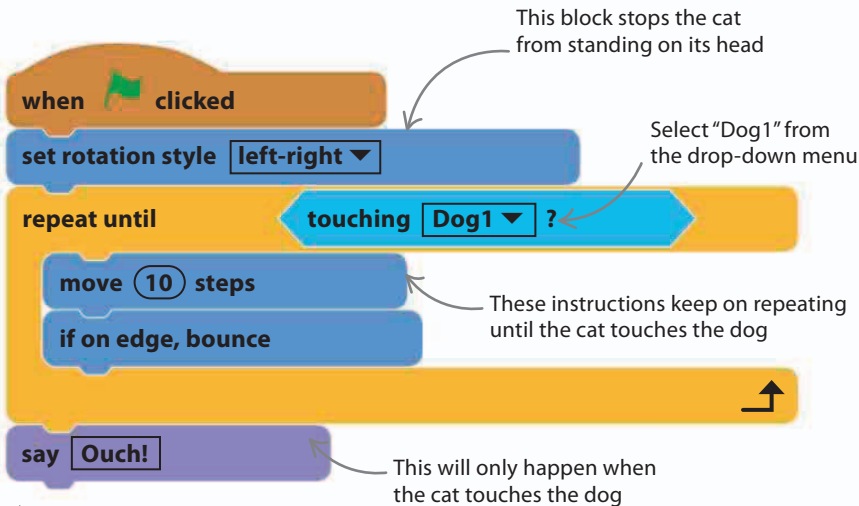

△ Testing the program

Move the dog out of the cat’s way and run the program. Then drag and drop the dog into the cat’s path to see what happens.




△ “Repeat until” block

The blocks inside the “repeat until” block keep repeating until the condition is true (the cat touches the dog).



Stop!

Another useful “Control” block is the “stop all” block, which can stop scripts from running. It’s useful if you want to stop sprites from moving at the end of a game.

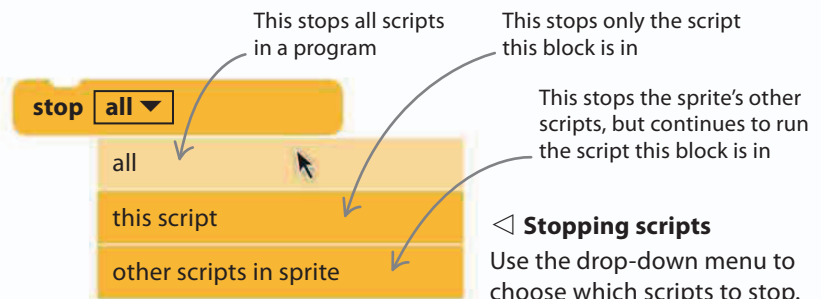

◁ Stopping scripts

Use the drop-down menu to choose which scripts to stop.

SEE ALSO

◀ 46–47 Simple loops

◀ 62–63 True or false?