


Waiting

It's easier to play a game or see what's going on in a program if you can make a script pause for a moment. Different blocks can make a script wait a number of seconds or until something is true.

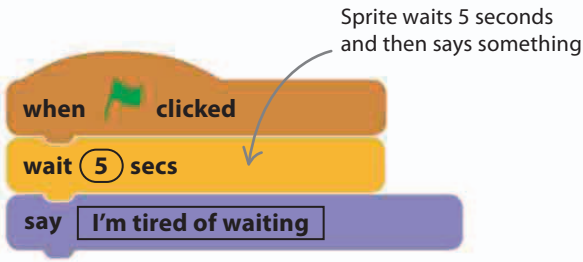


△ "wait secs" block

With the "wait secs" block you can enter the number of seconds you want a sprite to wait.



◁ Waiting blocks

The "wait secs" block waits a set amount of time. The "wait until" block responds to what's happening in the program.

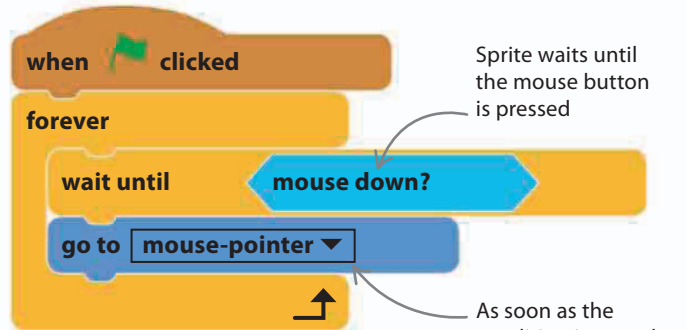


△ "wait until" block

This block waits until the Boolean expression in it is true.

Magnetic mouse

Different loops can be used together to make programs. This program starts once the mouse button is pressed. The sprite follows the mouse-pointer until the mouse button is released. It then jumps up and down five times. The whole thing then repeats itself because it's all inside a "forever" loop.

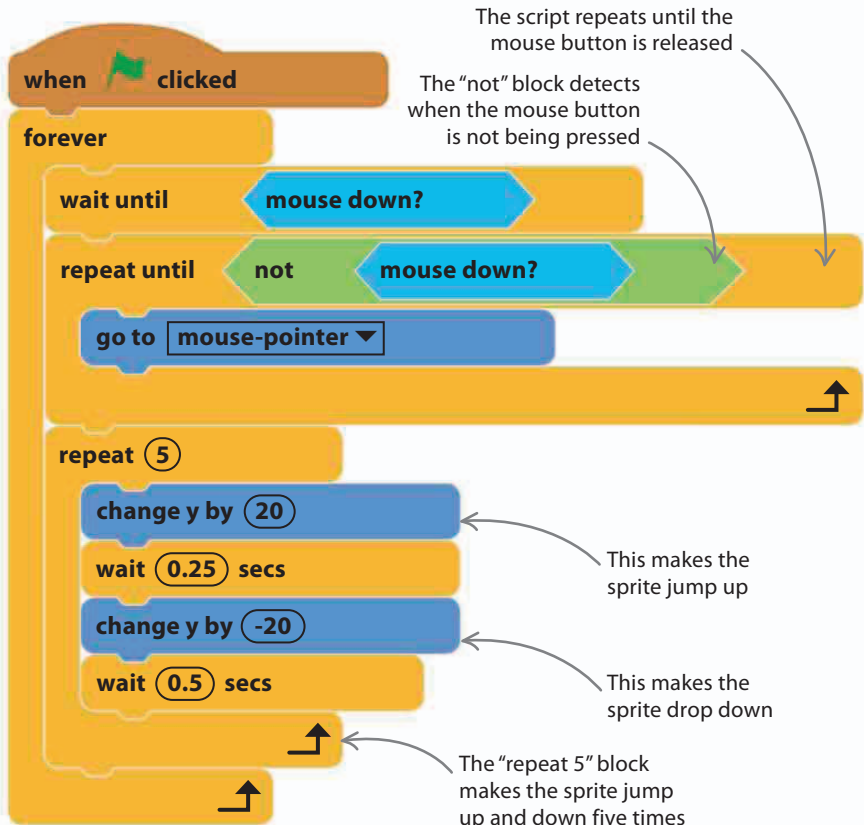

▷ Nested loops

Pay careful attention to how the loops are nested inside the "forever" block.