




REMEMBER

List positions

When Python numbers the items in a list, it starts from 0. So the first item in your `current_event` list, "Halloween", is in position 0, while the second item, "31/10/2017", is in position 1. That's why the code turns `current_event[1]` into a date.

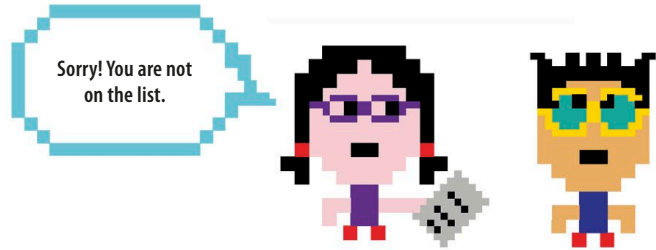

12 Using datetime

The event Halloween is stored in `current_event` as a list containing two items: "Halloween" and "31/10/2017". Use the `datetime` module to convert the second item in the list (in position 1) from a string into a form that Python can understand as a date. Add these lines of code at the bottom of the function.

```
current_event = line.split(',')
event_date = datetime.strptime(current_event[1], '%d/%m/%y').date()
current_event[1] = event_date
```

Turns the second item in the list from a string into a date.

Set the second item in the list to be the date of the event.

13 Add the event to the list

Now the `current_event` list holds two things: the name of the event (as a string) and the date of the event. Add `current_event` to the list of events. Here's the whole code for the `get_events()` function.

```
def get_events():
    list_events = []
    with open('events.txt') as file:
        for line in file:
            line = line.rstrip('\n')
            current_event = line.split(',')
            event_date = datetime.strptime(current_event[1], '%d/%m/%y').date()
            current_event[1] = event_date
            list_events.append(current_event)
    return list_events
```

After this line is run, the program loops back to read the next line from the file.

After all the lines have been read, the function hands over the complete list of events to the program.