



How it works

Running Tkinter's `root.mainloop()` function sets up a **while** loop that keeps checking for input from the user. The loop keeps going until you close the main Tkinter window. This is also how you were able to make a GUI (graphical user interface) that reacted to a user clicking on a button or entering text in Ask the Expert.



► Mainloop animation


You can also animate images in a Tkinter window using the `root.mainloop()` function. By telling it to run functions that change the image at set times, you can make Screen Pet appear to move by itself.



LINGO

Event-driven program

Screen Pet is an event-driven program, which means that the things it does and the order it does them in depend on input from the user. The program looks for inputs, such as key-presses and mouse-clicks, then calls a different function to handle each one. Word-processing programs, video games, and drawing programs are all examples of event-driven programs.

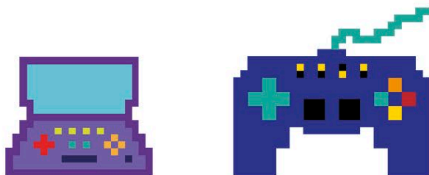

▽ Screen Pet flowchart

The flowchart shows the sequence of actions and decisions, and how user inputs affect them. The program runs in an endless loop. It uses an ever-changing happiness variable to keep track of the pet's mood.

