


You need to add one URL pattern for each view. There are three arguments when you set URL patterns.

```
urlpatterns = [  
    path('URL', ViewName.as_view(), name='URL name')  
]
```

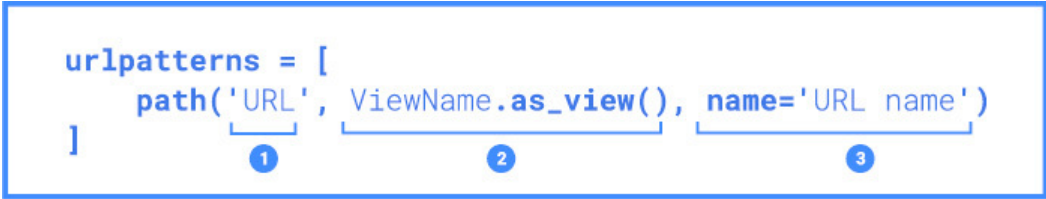

The diagram shows the code snippet above with three blue brackets and numbers below them: bracket 1 under 'URL', bracket 2 under 'ViewName.as_view()', and bracket 3 under 'name='URL name'.

1. URL

In this part, you can set a URL you want to use. To avoid confusion, use a **slug** related to the view. Usually, the **kebab-case** is used for this part. You can set a variable in a part of the URL using **path converter** <>, which will be explained later.

2. View name

In this part, you can specify which view you want to link to the URL. For **class-based views**, usually, **PascalCase** is used. You need to add `.as_view()` after the view name for class-based views. You don't need to add `.as_view()` when you use function-based views.

3. URL name

In Chapter 2, we only covered the first two arguments but not the `name` argument. The `name` argument is useful when you handle the **reverse URL resolution**. For example, by setting this, you can call the URL in *views.py*.

Path converter – <init:pk>

Using a **path converter**, you can set a variable in the URL. The variable is defined using **angle brackets** <>. The most frequently used one is `<int:pk>`. The `int` part is a data type. `int` means zero or any positive integer. The `pk` part is a variable.