


## Customize Views (3) – Add Extra Context

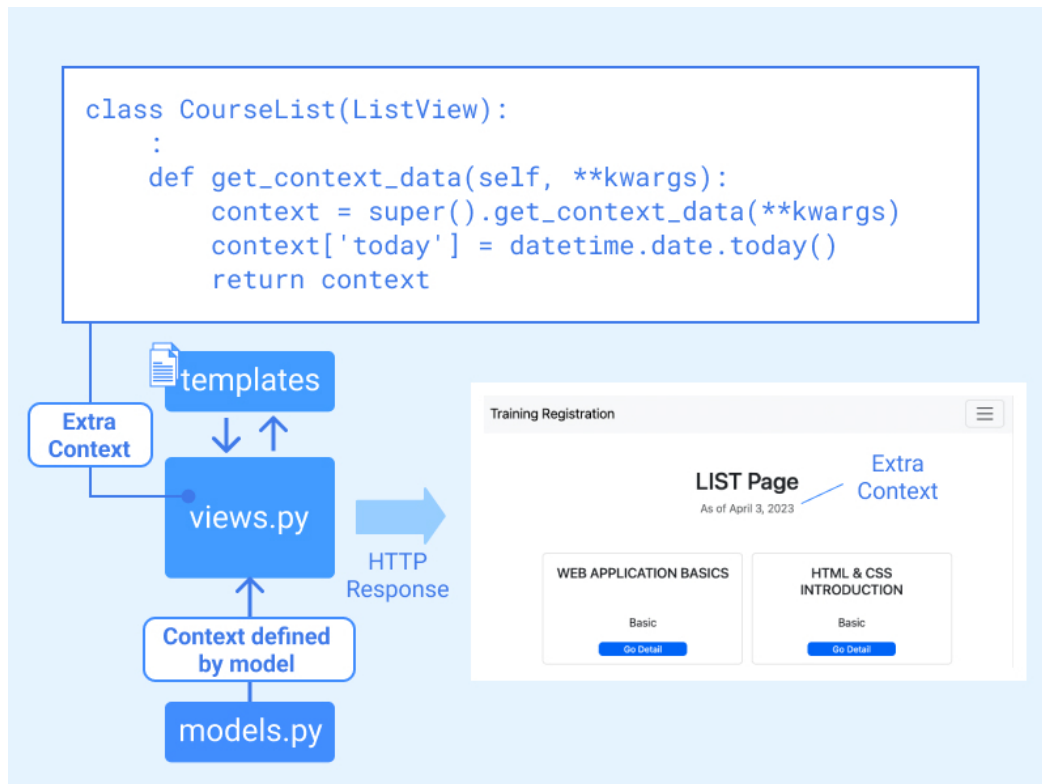

The **context** data are already generated when you specify the `model` or `queryset` attribute. By overriding the `get_context_data` method, you can also add new context data. Here we'll explain how to add extra context with the employee learning app example.

### 1. Override the `get_context_data` method

In this case, we'll add new context data `'today'`. In `views.py`, add import the `datetime` function so that you can use it in the overriding method.

In the `CourseList` view, override the `get_context_data` method like shown in the `yellow` code part below.

`employee_learning/views.py`