

1. Create the settings directory and setting files

There are several use cases for this approach. In our case, we'll create three settings files.


- **base.py**: the original *settings.py* (rename)
- **development.py**: use this for settings for development in the local environment
- **production.py**: use this for settings for production on the server

Here are the key steps.

1. Create the settings directory and save the three files under the directory

Create *development.py* and *production.py*. Rename *settings.py* to *base.py*. Create the *settings* directory. Save the three files under the *settings* directory.

The directory structure will be like the one below.

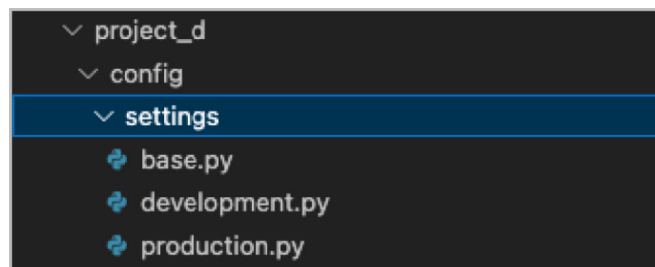

2. Update base.py

As the directory structure has changed, the `BASE_DIR` path should be updated. Add one more '**parent**' in the path like shown below.

`config/settings/base.py`

```
BASE_DIR = Path(__file__).resolve().parent.parent.parent
```

3. Edit development.py and production.py