


Three steps were explained in the previous chapter. We'll explain the key differences for each step on this lesson.

1. Register a new OAuth app on the GitHub website

- Create a new app with a different name (e.g., Employee Learning (Production))
- For the home page URL and the callback URL, use the domain registered for the app instead of *localhost*

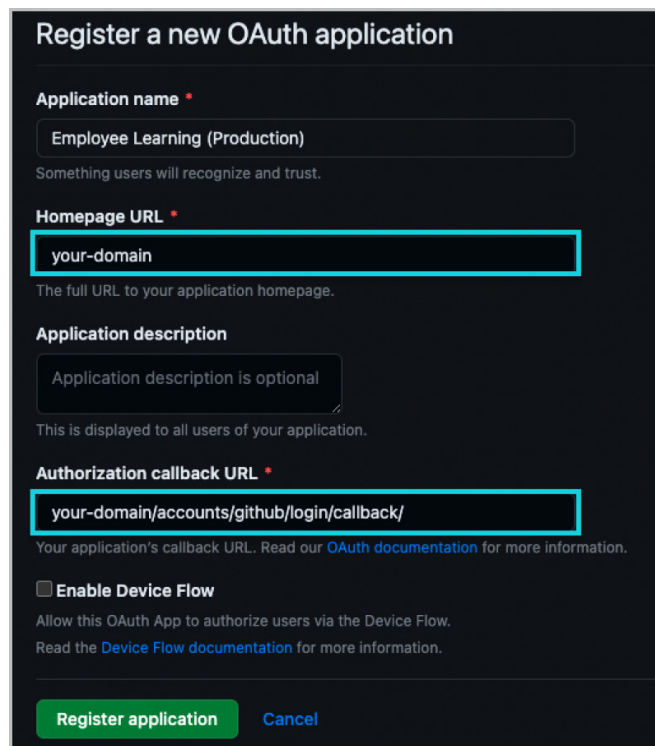


The screenshot shows the 'Register a new OAuth application' form on GitHub. The form has the following fields and content:

- Application name ***: A text input field containing 'Employee Learning (Production)'. Below it, a note says 'Something users will recognize and trust.'
- Homepage URL ***: A text input field containing 'your-domain'. Below it, a note says 'The full URL to your application homepage.'
- Application description**: A text area with the placeholder 'Application description is optional'. Below it, a note says 'This is displayed to all users of your application.'
- Authorization callback URL ***: A text input field containing 'your-domain/accounts/github/login/callback/'. Below it, a note says 'Your application's callback URL. Read our [OAuth documentation](#) for more information.'
- Enable Device Flow**: A checkbox that is currently unchecked. Below it, a note says 'Allow this OAuth App to authorize users via the Device Flow. Read the [Device Flow documentation](#) for more information.'

At the bottom of the form, there are two buttons: 'Register application' (in green) and 'Cancel' (in blue).

Once the registration is done, there are two **OAuth Apps** like shown below.

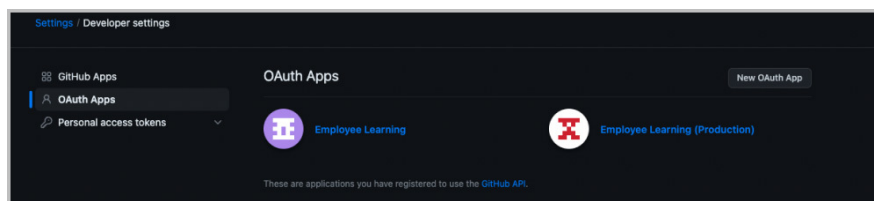

2. Edit settings.py