

hx-swap tags indicate what to do with the resulting content, with the target identifying what tag to replace and the swap attribute indicating how to replace it. A value of `hx-swap="innerHTML"` means to replace the contents inside the tag identified as the target. Figure 12.1 shows you this interaction.

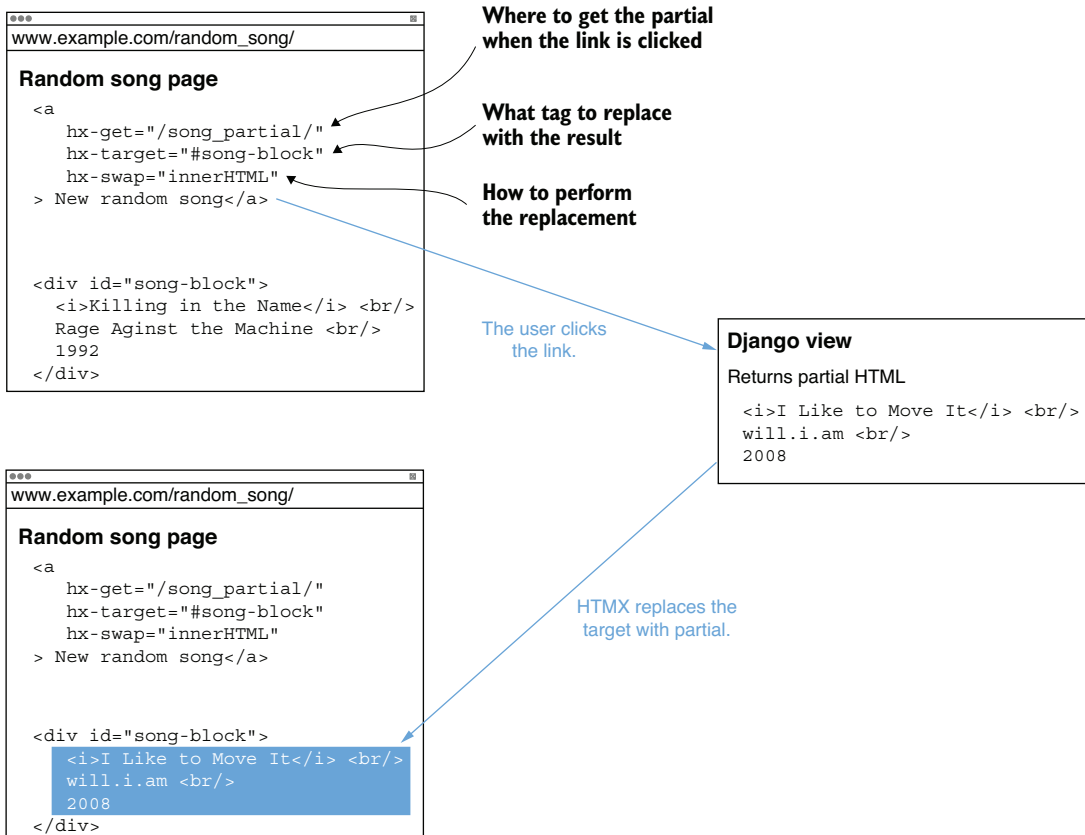


Figure 12.1 Using HTMX attributes to change a link into an action that replaces a portion of the page

HTMX operation attributes, like `hx-get`, are aware of their context. For example, when paired with an `<input>` tag, the `hx-get` is capable of including the value inside the input box as a query parameter in the URL it calls. Likewise, `hx-post` is aware of any forms it is attached to. The `hx-trigger` attribute allows you to specify when an action occurs. In conjunction with an input box, the trigger can be related to a key-press event. You can also trigger actions based on a tag becoming visible or the page getting loaded. With just a handful of attributes and the same view-based mechanisms you're already using in Django, HTMX provides a lot of possibilities.