

On Ubuntu or Debian Linux, run `sudo apt install git-all` from the terminal. On Red Hat Linux, run `sudo dnf install git-all` from the terminal. Find instructions for other Linux distributions at <https://git-scm.com/download/linux>. Confirm that the install worked by running `git --version`.

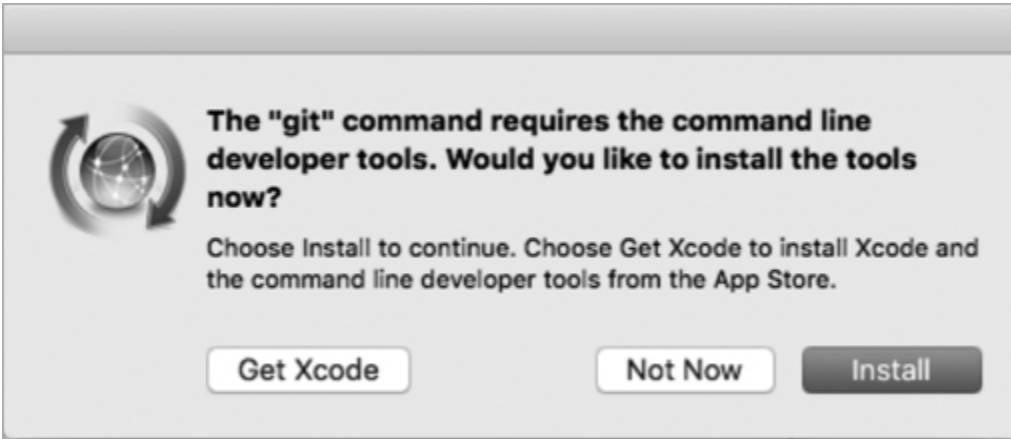


Figure 12-2: The first time you run `git --version` on macOS 10.9 or later, you'll be prompted to install Git.

Configuring Your Git Username and Email

After installing Git, you need to configure your name and email so your commits include your author information. From a terminal, run the following `git config` commands using your name and email information:

```
C:\Users\Al>git config --global user.name "Al Sweigart"
C:\Users\Al>git config --global user.email al@inventwithpython.com
```

This configuration information is stored in a `.gitconfig` file in your home folder (such as `C:\Users\Al` on my Windows laptop). You'll never need to edit this text file directly. Instead, you can change it by running the `git config` command. You can list the current Git configuration settings using the `git config --list` command.

Installing GUI Git Tools

This chapter focuses on the Git command line tool, but installing software that adds a GUI for Git can help you with day-to-day tasks. Even