


diff program, and then install it. On Linux, you can install either Meld by using the `sudo apt-get install meld` command or Kompare by using the `sudo apt-get install kompare` command. On macOS, you can install tkdiff by using commands that first install and configure Homebrew (a package manager that installs software) and then using Homebrew to install tkdiff:

```
/bin/bash -c "$(curl -fsSL
https://raw.githubusercontent.com/Homebrew/install/master/install.sh)"
brew install tkdiff
```

You can configure Git to use these tools by running `git config diff.tool <tool_name>`, where `<tool_name>` is `winmerge`, `tkdiff`, `meld`, or `kompare`. Then run `git diff<file>` to view the changes made to a file in the tool's GUI, as shown in [Figure 12-5](#).

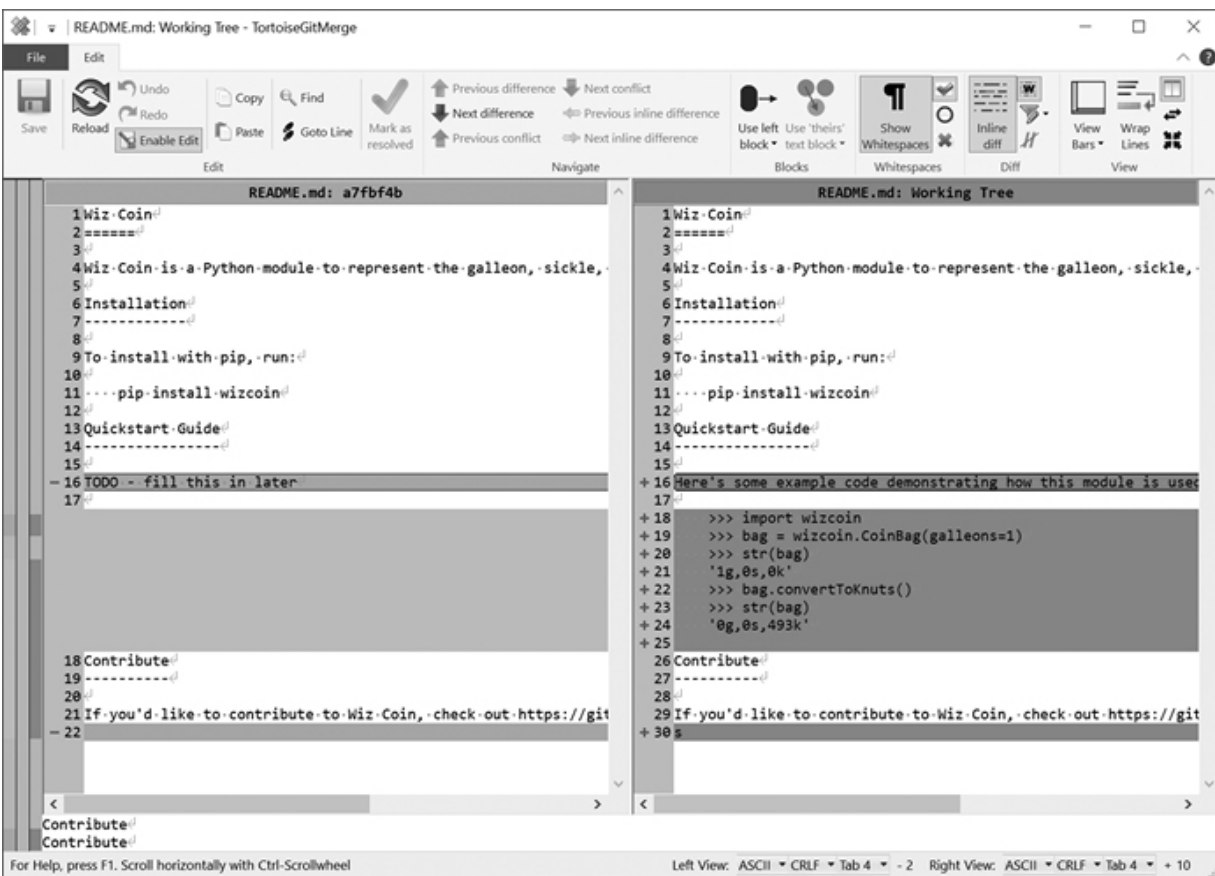

[Figure 12-5](#): A GUI diff tool, in this case WinMerge, is more readable than the text output of `git diff`.