


```
rd /s /q delicious
rm -r delicious
```

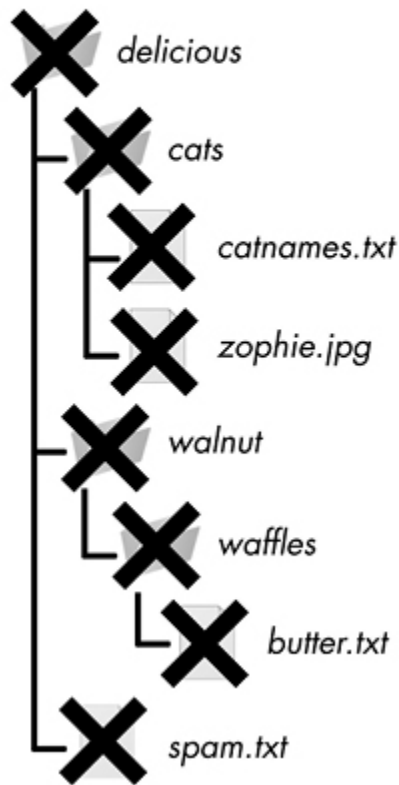

[Figure 2-5](#): The files are deleted in these example folders when you run `rd /s /q delicious` or `rm -r delicious`.

## Make Folders with `md` and `mkdir`

Running `md [new folder]` creates a new, empty folder on Windows, and running `mkdir [new folder]` does so on macOS and Linux. The `mkdir` command also works on Windows, but `md` is easier to type.

Here's an example in a Linux terminal window:

---

```
al@ubuntu:~/Desktop$ mkdir yourScripts
al@ubuntu:~/Desktop$ cd yourScripts
❶ al@ubuntu:~/Desktop/yourScripts$ ls
al@ubuntu:~/Desktop/yourScripts$
```

---

Notice that the newly created *yourScripts* folder is empty; nothing appears when we run the `ls` command to list the folder's contents ❶.