

And here's the updated `__init__()` method:

```
alien_invasion.py    def __init__(self):
                    --snip--
                    self.ship = Ship(self)
                    self.bullets = pygame.sprite.Group()
                    self.aliens = pygame.sprite.Group()

                    self._create_fleet()
```

We create a group to hold the fleet of aliens, and we call `_create_fleet()`, which we're about to write.

Here's the new `_create_fleet()` method:

```
alien_invasion.py    def _create_fleet(self):
                    """Create the fleet of aliens."""
                    # Make an alien.
                    alien = Alien(self)
                    self.aliens.add(alien)
```

In this method, we're creating one instance of `Alien` and then adding it to the group that will hold the fleet. The alien will be placed in the default upper-left area of the screen.

To make the alien appear, we need to call the group's `draw()` method in `_update_screen()`:

```
alien_invasion.py    def _update_screen(self):
                    --snip--
                    self.ship.blitme()
                    self.aliens.draw(self.screen)

                    pygame.display.flip()
```

When you call `draw()` on a group, Pygame draws each element in the group at the position defined by its `rect` attribute. The `draw()` method requires one argument: a surface on which to draw the elements from the group. Figure 13-2 shows the first alien on the screen.

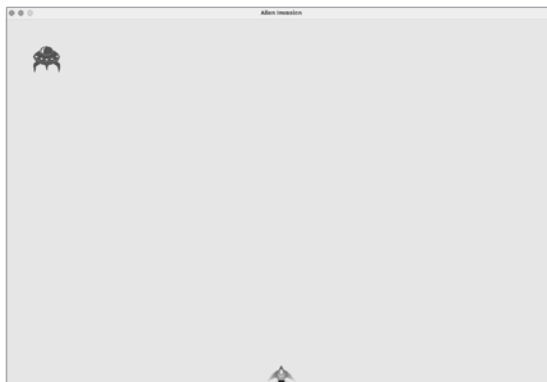


Figure 13-2: The first alien appears.