

We use `range()` to generate a list of numbers equal to the number of points in the walk ❶. We assign this list to `point_numbers`, which we'll use to set the color of each point in the walk. We pass `point_numbers` to the `c` argument, use the `Blues` colormap, and then pass `edgecolors='none'` to get rid of the black outline around each point. The result is a plot that varies from light to dark blue, showing exactly how the walk moves from its starting point to its ending point. This is shown in Figure 15-10.

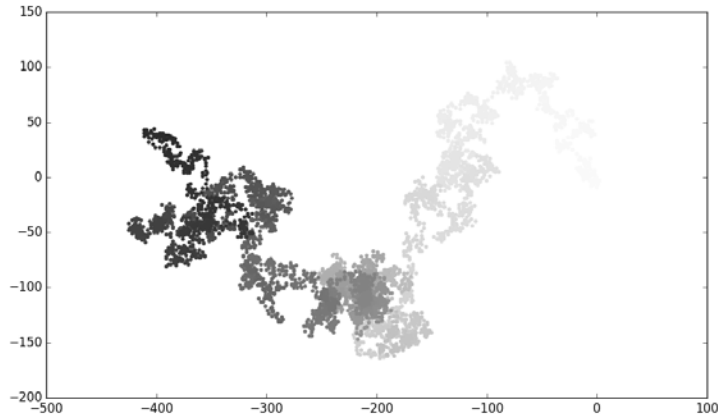


Figure 15-10: A random walk colored with the *Blues* colormap

Plotting the Starting and Ending Points

In addition to coloring points to show their position along the walk, it would be useful to see exactly where each walk begins and ends. To do so, we can plot the first and last points individually after the main series has been plotted. We'll make the end points larger and color them differently to make them stand out:

```
rw_visual.py --snip--
while True:
    --snip--
    ax.scatter(rw.x_values, rw.y_values, c=point_numbers, cmap=plt.cm.Blues,
               edgecolors='none', s=15)
    ax.set_aspect('equal')

    # Emphasize the first and last points.
    ax.scatter(0, 0, c='green', edgecolors='none', s=100)
    ax.scatter(rw.x_values[-1], rw.y_values[-1], c='red', edgecolors='none',
               s=100)

    plt.show()
--snip--
```

To show the starting point, we plot the point (0, 0) in green and in a larger size (`s=100`) than the rest of the points. To mark the end point, we