

```

# Plot the high temperatures.
plt.style.use('seaborn')
fig, ax = plt.subplots()
❶ ax.plot(highs, color='red')

# Format plot.
❷ ax.set_title("Daily High Temperatures, July 2021", fontsize=24)
❸ ax.set_xlabel('', fontsize=16)
ax.set_ylabel("Temperature (F)", fontsize=16)
ax.tick_params(labelsize=16)

plt.show()

```

We pass the list of highs to `plot()` and pass `color='red'` to plot the points in red ❶. (We'll plot the highs in red and the lows in blue.) We then specify a few other formatting details, such as the title, font size, and labels ❷, just as we did in Chapter 15. Because we have yet to add the dates, we won't label the *x*-axis, but `ax.set_xlabel()` does modify the font size to make the default labels more readable ❸. Figure 16-1 shows the resulting plot: a simple line graph of the high temperatures for July 2021 in Sitka, Alaska.

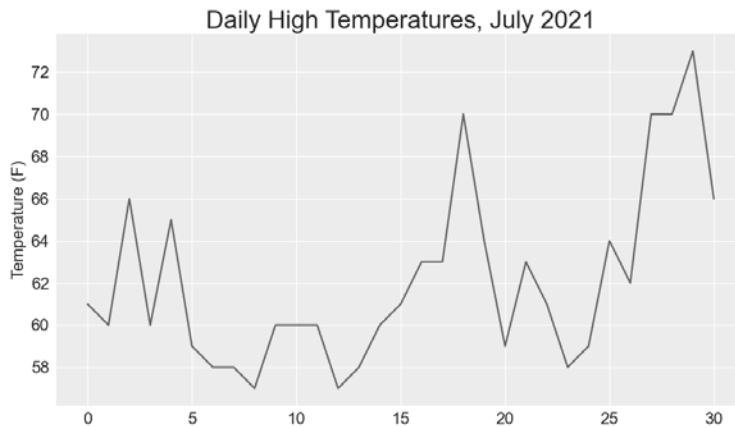


Figure 16-1: A line graph showing daily high temperatures for July 2021 in Sitka, Alaska

The *datetime* Module

Let's add dates to our graph to make it more useful. The first date from the weather data file is in the second row of the file:

```
"USW00025333", "SITKA AIRPORT, AK US", "2021-07-01", "61", "53"
```

The data will be read in as a string, so we need a way to convert the string "2021-07-01" to an object representing this date. We can construct