

```

reader = csv.reader(lines)
header_row = next(reader)

# Extract dates and high temperatures.
❶ dates, highs = [], []
for row in reader:
    ❷ current_date = datetime.strptime(row[2], '%Y-%m-%d')
      high = int(row[4])
      dates.append(current_date)
      highs.append(high)

# Plot the high temperatures.
plt.style.use('seaborn')
fig, ax = plt.subplots()
❸ ax.plot(dates, highs, color='red')

# Format plot.
ax.set_title("Daily High Temperatures, July 2021", fontsize=24)
ax.set_xlabel('', fontsize=16)
❹ fig.autofmt_xdate()
ax.set_ylabel("Temperature (F)", fontsize=16)
ax.tick_params(labelsize=16)

plt.show()

```

We create two empty lists to store the dates and high temperatures from the file ❶. We then convert the data containing the date information (row[2]) to a datetime object ❷ and append it to dates. We pass the dates and the high temperature values to plot() ❸. The call to fig.autofmt_xdate() ❹ draws the date labels diagonally to prevent them from overlapping. Figure 16-2 shows the improved graph.

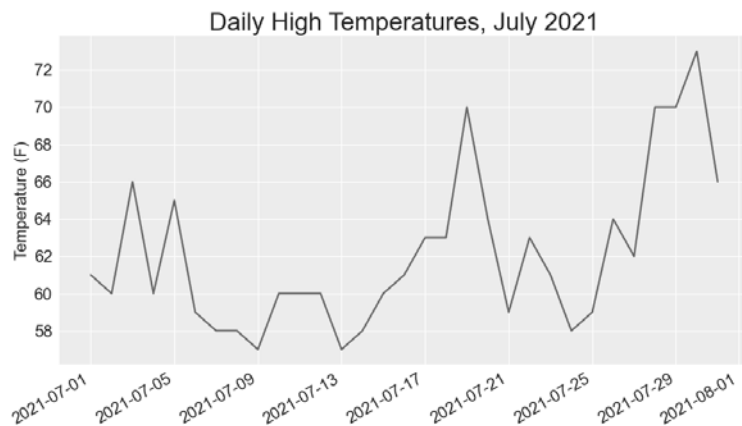


Figure 16-2: The graph is more meaningful, now that it has dates on the x-axis.