

```

        current_date = datetime.strptime(row[2], '%Y-%m-%d')
        high = int(row[4])
    ❷ low = int(row[5])
        dates.append(current_date)
        highs.append(high)
        lows.append(low)

# Plot the high and low temperatures.
plt.style.use('seaborn')
fig, ax = plt.subplots()
ax.plot(dates, highs, color='red')
    ❸ ax.plot(dates, lows, color='blue')

# Format plot.
    ❹ ax.set_title("Daily High and Low Temperatures, 2021", fontsize=24)
--snip--

```

We add the empty list `lows` to hold low temperatures ❶, and then we extract and store the low temperature for each date from the sixth position in each row (`row[5]`) ❷. We add a call to `plot()` for the low temperatures and color these values blue ❸. Finally, we update the title ❹. Figure 16-4 shows the resulting chart.

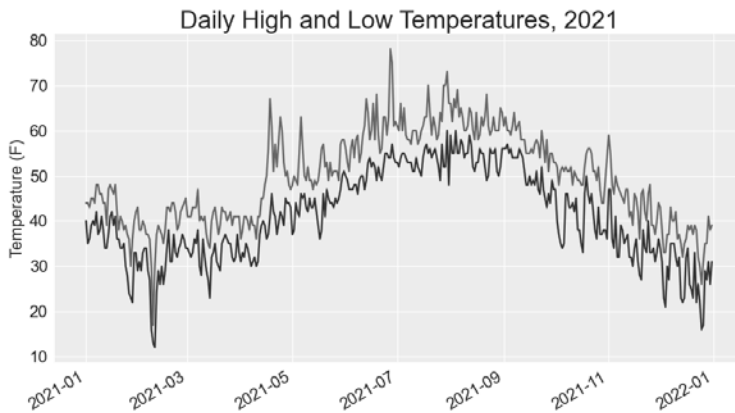


Figure 16-4: Two data series on the same plot

Shading an Area in the Chart

Having added two data series, we can now examine the range of temperatures for each day. Let's add a finishing touch to the graph by using shading to show the range between each day's high and low temperatures. To do so, we'll use the `fill_between()` method, which takes a series of *x*-values and two series of *y*-values and fills the space between the two series of *y*-values:

```

sitka
_highs_lows.py
--snip--
# Plot the high and low temperatures.
plt.style.use('seaborn')

```