

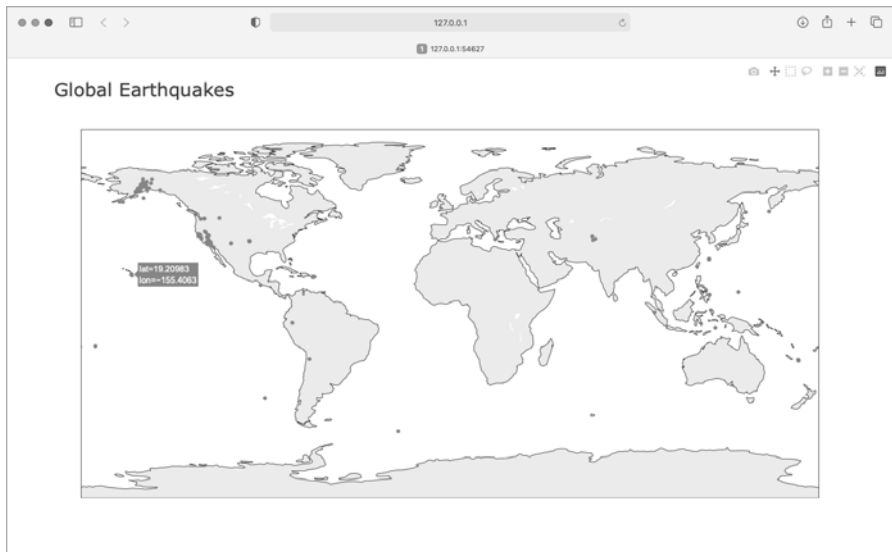


Figure 16-7: A simple map showing where all the earthquakes in the last 24 hours occurred

Now that we know the information in our dataset is being plotted correctly, we can make a few changes to make the map more meaningful and easier to read.

Representing Magnitudes

A map of earthquake activity should show the magnitude of each earthquake. We can also include more data, now that we know the data is being plotted correctly.

```
--snip--
# Read data as a string and convert to a Python object.
path = Path('eq_data/eq_data_30_day_m1.geojson')
contents = path.read_text()
--snip--

title = 'Global Earthquakes'
fig = px.scatter_geo(lat=lats, lon=lons, size=mags, title=title)
fig.show()
```

We load the file `eq_data_30_day_m1.geojson`, to include a full 30 days' worth of earthquake activity. We also use the `size` argument in the `px.scatter_geo()` call, which specifies how the points on the map will be sized. We pass the list `mags` to `size`, so earthquakes with a higher magnitude will show up as larger points on the map.

The resulting map is shown in Figure 16-8. Earthquakes usually occur near tectonic plate boundaries, and the longer period of earthquake activity included in this map reveals the exact locations of these boundaries.