

To make this change, we need to pull a little more data from the file:

```
eq_world
_map.py  --snip--
❶ mags, lons, lats, eq_titles = [], [], [], []
    mag = eq_dict['properties']['mag']
    lon = eq_dict['geometry']['coordinates'][0]
    lat = eq_dict['geometry']['coordinates'][1]
❷    eq_title = eq_dict['properties']['title']
    mags.append(mag)
    lons.append(lon)
    lats.append(lat)
    eq_titles.append(eq_title)

title = 'Global Earthquakes'
fig = px.scatter_geo(lat=lats, lon=lons, size=mags, title=title,
    --snip--
    projection='natural earth',
❸    hover_name=eq_titles,
    )
fig.show()
```

We first make a list called `eq_titles` to store the title of each earthquake ❶. The 'title' section of the data contains a descriptive name of the magnitude and location of each earthquake, in addition to its longitude and latitude. We pull this information and assign it to the variable `eq_title` ❷, and then append it to the list `eq_titles`.

In the `px.scatter_geo()` call, we pass `eq_titles` to the `hover_name` argument ❸. Plotly will now add the information from the title of each earthquake to the hover text on each point. When you run this program, you should be able to hover over any marker, see a description of where that earthquake took place, and read its exact magnitude. An example of this information is shown in Figure 16-10.

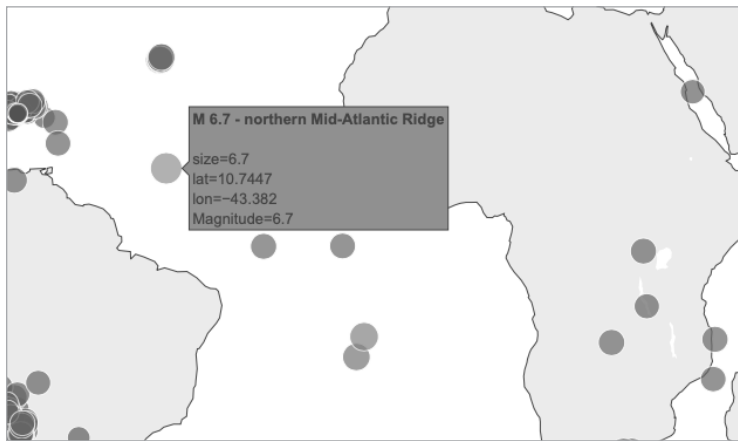


Figure 16-10: The hover text now includes a summary of each earthquake.

This is impressive! In less than 30 lines of code, we've created a visually appealing and meaningful map of global earthquake activity that also