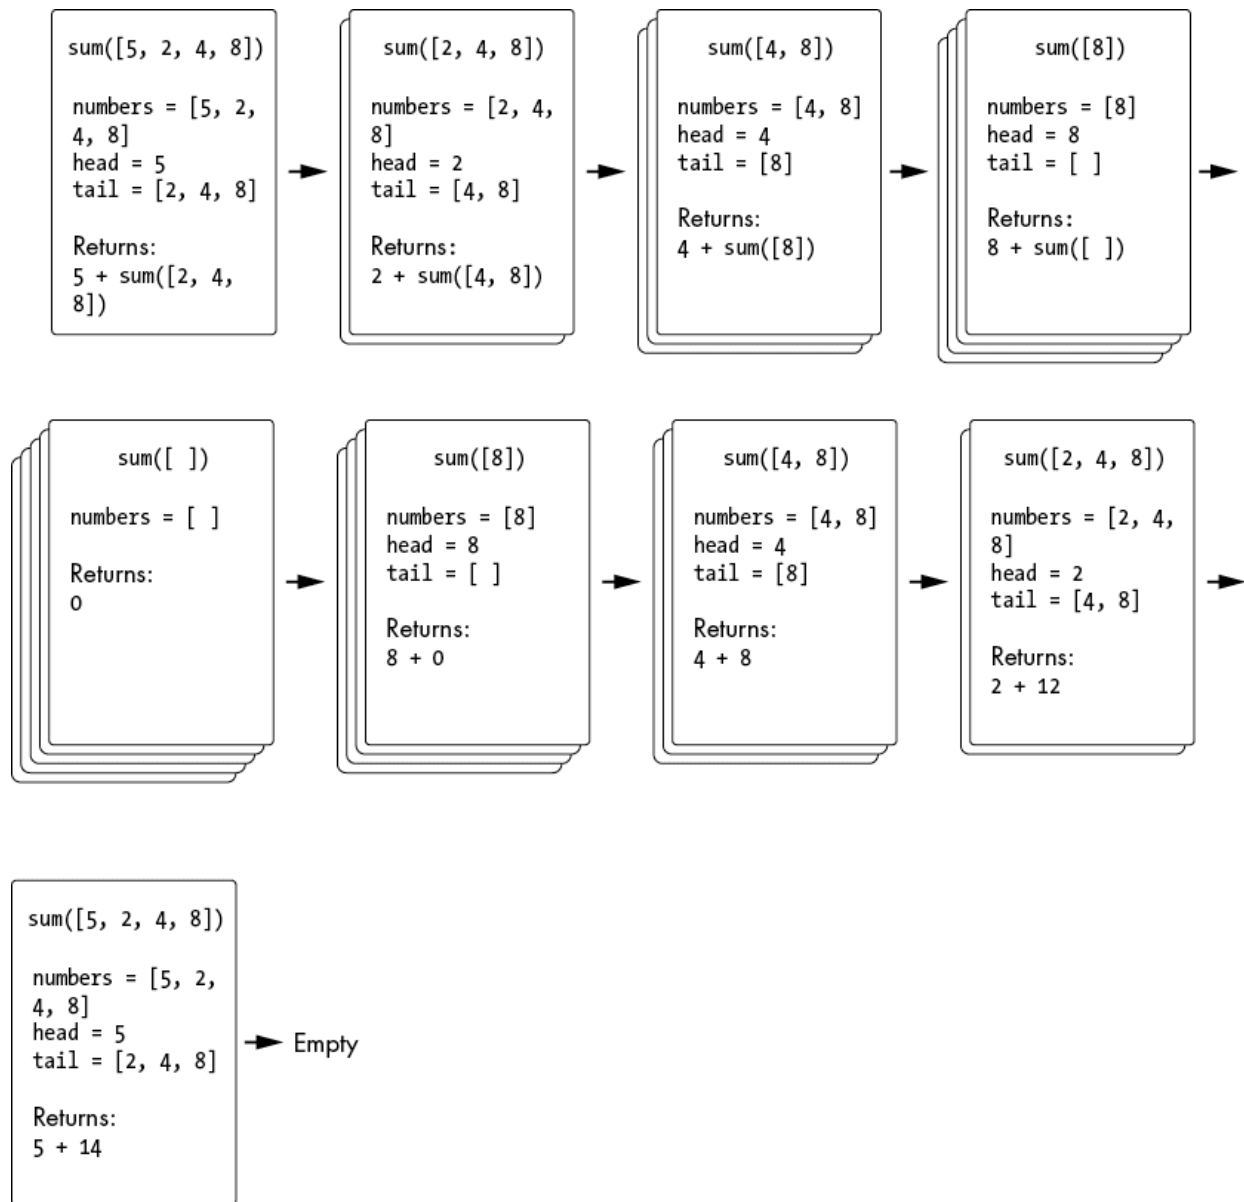




*Figure 3-1: The state of the call stack when `sum([5, 2, 4, 8])` runs*

We can use the `sum()` function as a template for applying the head-tail technique to other recursive functions. For example, you can change the `sum()` function from one that sums an array of numbers to a `concat()` function that concatenates an array of strings together. The base case would return an empty string for an empty array argument, while the recursive case would return the head string joined with the return value of the recursive call that is passed the tail.