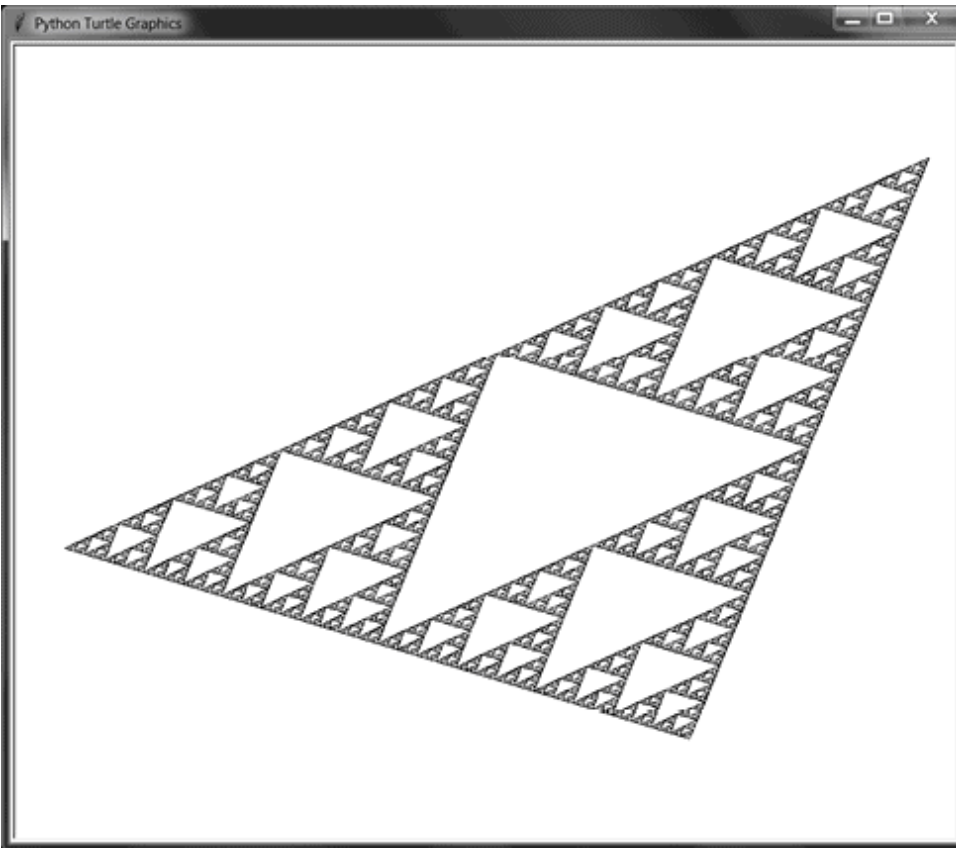




*Figure 9-6: A skewed Sierpiński triangle*

The `drawTriangle()` function takes six arguments corresponding to the x, y coordinates of the triangle's three points. Try experimenting with different values to adjust the shape of the Sierpiński triangle. You can also change the `MIN_SIZE` constant to a larger value to make the program reach the base case sooner and reduce the number of triangles drawn.