

because slight rounding errors cause the `turtle` module to be unable to completely erase the middle $b / 3$ segment.) You can continue to create new bumps forever, though our program stops when they get smaller than a few pixels.

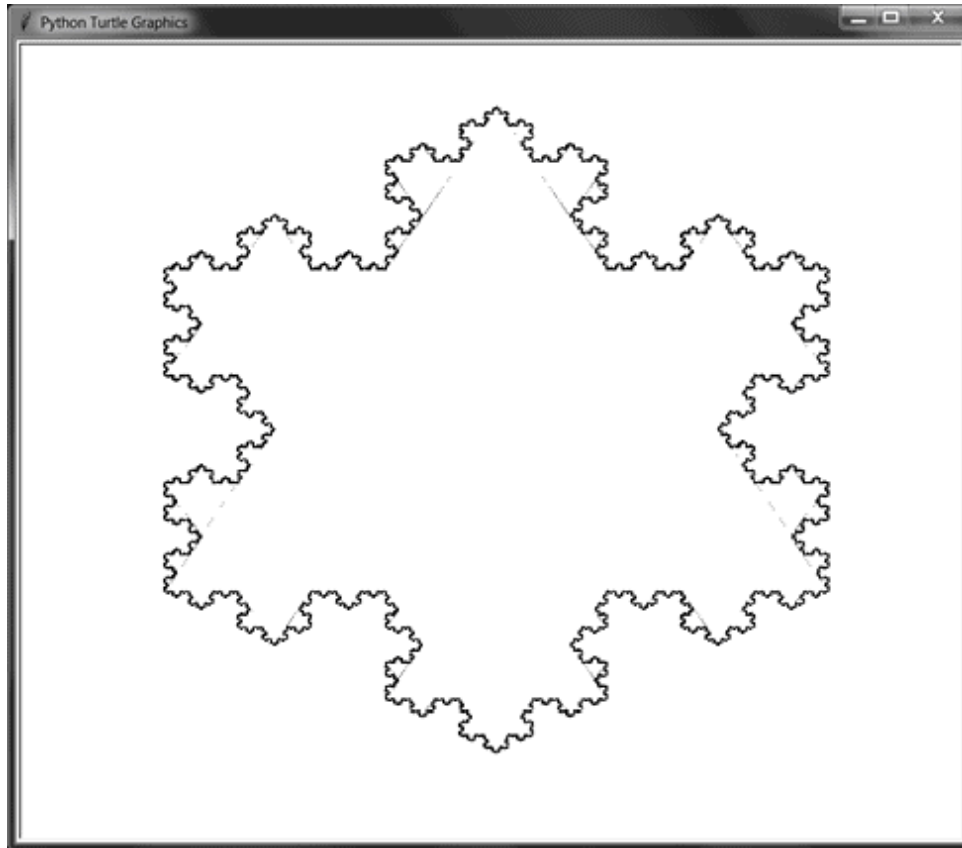


Figure 9-16: A Koch snowflake. Some of the interior lines remain because of small rounding errors.

The source code for *kochSnowflake.py* is as follows:

Python

```
import turtle
turtle.tracer(10, 0) # Increase the first argument to speed up the drawing.
turtle.setworldcoordinates(0, 0, 700, 700)
turtle.hideturtle()
turtle.pensize(2)

def drawKochCurve(startPosition, heading, length):
    if length < 1:
        # BASE CASE
```