

```
>>> time.gmtime(ctimestamp)
time.struct_time(tm_year=2021, tm_mon=7, tm_mday=8, tm_hour=0,
tm_min=59, tm_sec=2, tm_wday=3, tm_yday=189, tm_isdst=0)
```

The interaction between these `os.path` functions (which return Unix epoch timestamps) and `time` functions (which return `struct_time` objects) can be confusing. [Figure 10-2](#) shows the chain of code starting from the filename string and ending with obtaining the individual parts of the timestamp.

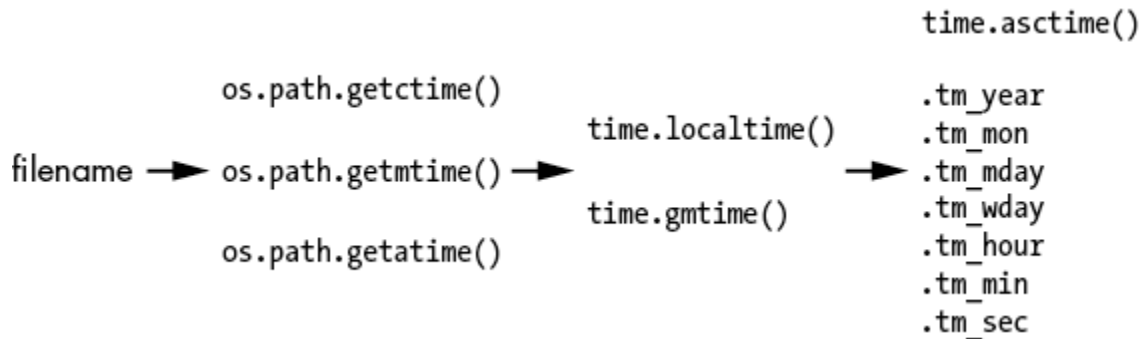


Figure 10-2: Going from the filename to the individual attributes of a timestamp

Finally, the `time.time()` function returns the number of seconds since the Unix epoch to the current time.

Modifying Your Files

After the `walk()` function returns a list of files matching your search criteria, you may want to rename, delete, or perform another operation on them. The `shutil` and `os` modules in the Python standard library have functions to do this. Further, the `send2trash` third-party module can also send files to your operating system's Recycle Bin, rather than permanently deleting them.

To move a file, call the `shutil.move()` function with two arguments. The first argument is the file to move, and the second is the folder to move it to. For example, you could call the following:

Python

```
>>> import shutil
>>> shutil.move('spam.txt', 'someFolder')
'someFolder\\spam.txt'
```
