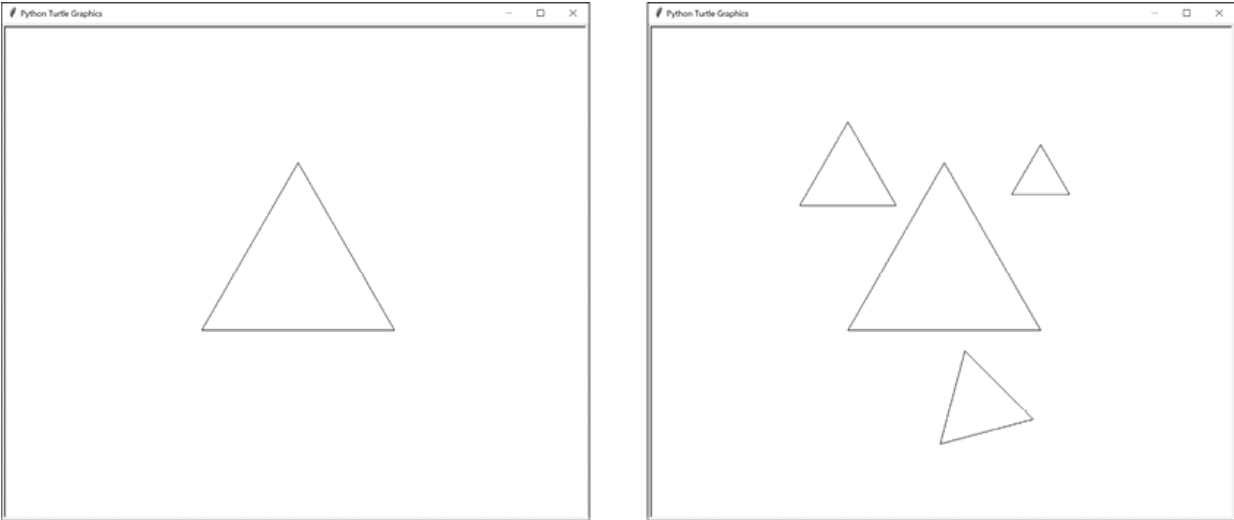




*Figure 13-3: The triangle produced by the first call to `drawFractal()` (left) and the first set of three recursive calls (right)*

The first recursive call tells `drawFractal()` to call `drawTriangleOutline()` but with a triangle that is half the size and positioned to the top left of the previous triangle. The second recursive call produces a triangle to the top right of the previous triangle that is 30 percent of its size. The third recursive call produces a triangle below the previous triangle that is half its size and rotated 15 degrees compared to it.

Each of these three recursive calls to `drawFractal()` makes three more recursive calls to `drawFractal()`, producing nine new triangles. The new triangles have the same changes to their size, position, and angle relative to their previous triangle. The top-left triangle is always half the size of the previous triangle, while the bottom triangle is always rotated 15 degrees more. [Figure 13-4](#) shows the triangles produced by the first and second levels of recursion.