

To determine the size of the next square to be drawn, the value for the `sizeChange` key is multiplied by the current `size` parameter. The first dictionary in the `specs` list has a `sizeChange` value of `0.5`, which makes the next recursive call have a `size` argument of $350 * 0.5$, or 175 units. This makes the next square half the size of the previous square. A `sizeChange` value of `2.0` would, for example, double the size of the next square. If the dictionary has no `sizeChange` key, the value defaults to `1.0` for no change to the size.

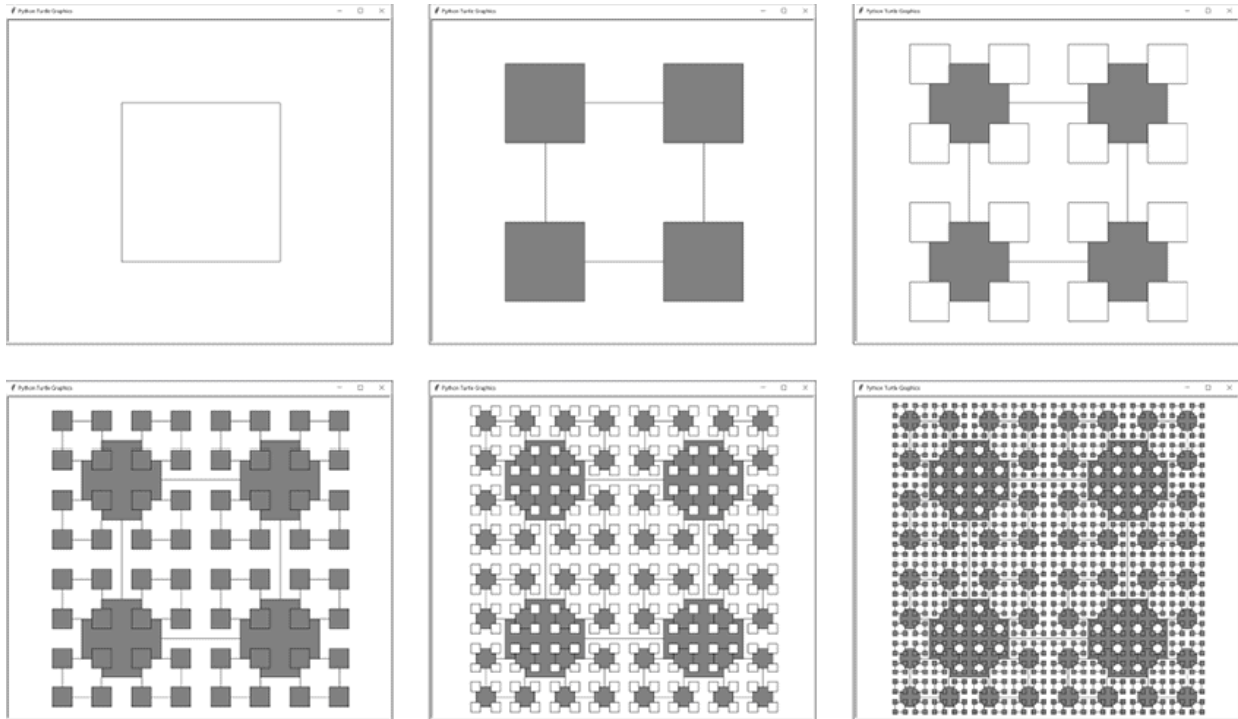


Figure 13-8: Each step of the Four Corners example from left to right, top to bottom. Each square recursively produces four more squares at its corners, with colors alternating between white and gray.

To determine the x-coordinate of the next square, the first dictionary's `xChange` value, `-0.5` in this case, is multiplied by the `size`. When `size` is 350, this means the next square has an x-coordinate of -175 units relative to the turtle's current position. This `xChange` value and the `yChange` key's value of `0.5` places the next square's position a distance of 50 percent of the current square's size, to the left and above the current square's position. This happens to center it on the top-left corner of the current square.

If you look at the three other dictionaries in the `specs` list, you'll notice they all have a `sizeChange` value of `0.5`. The difference between them is that their `xChange` and `yChange` values place them in the other three corners of the