

current square. As a result, the next four squares are drawn centered on the four corners of the current square.

The dictionaries in the `specs` list for this example don't have an `angleChange` value, so this value defaults to `0.0` degrees. A positive `angleChange` value indicates a counterclockwise rotation, while a negative value indicates a clockwise rotation.

Each dictionary represents a separate square to be drawn each time the recursive function is called. If we were to remove the first dictionary from the `specs` list, each `drawFractal()` call would produce only three squares, as in [Figure 13-9](#).

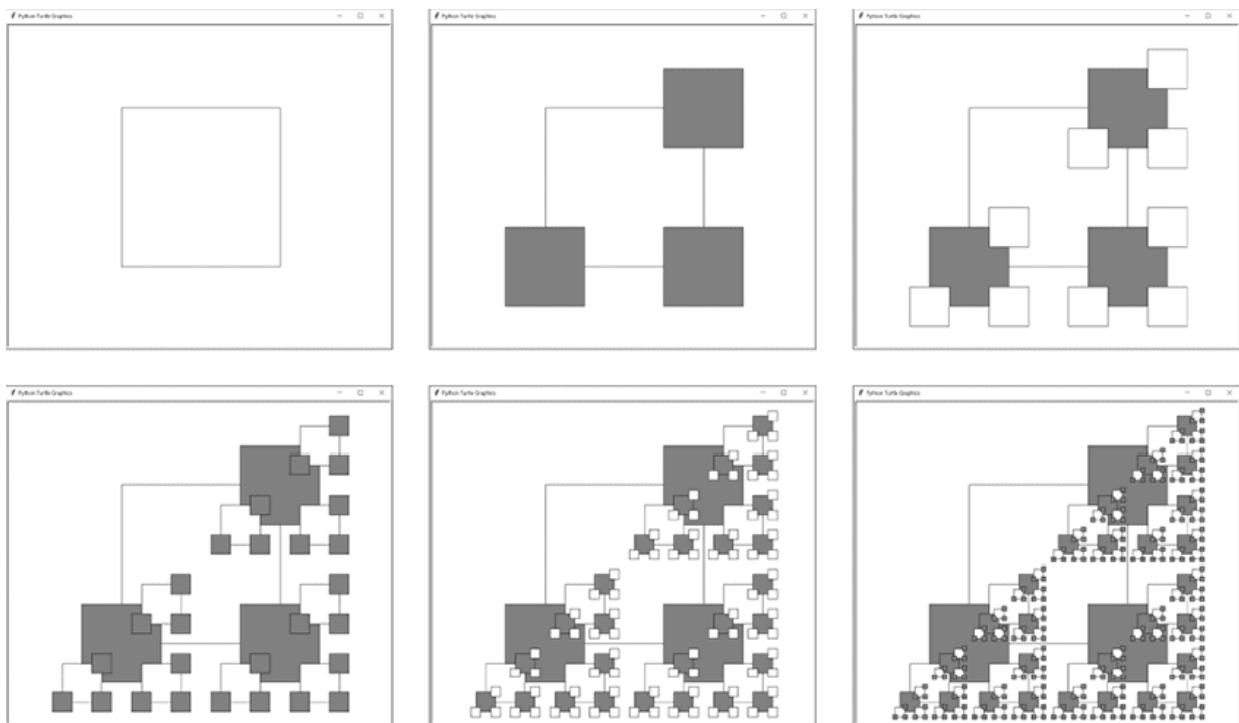


Figure 13-9: The Four Corners fractal with the first dictionary removed from the `specs` list

Applying the Specifications

Let's look at how the code in `drawFractal()` actually does everything we've described:

Python

```
# RECURSIVE CASE
for spec in specs:
```