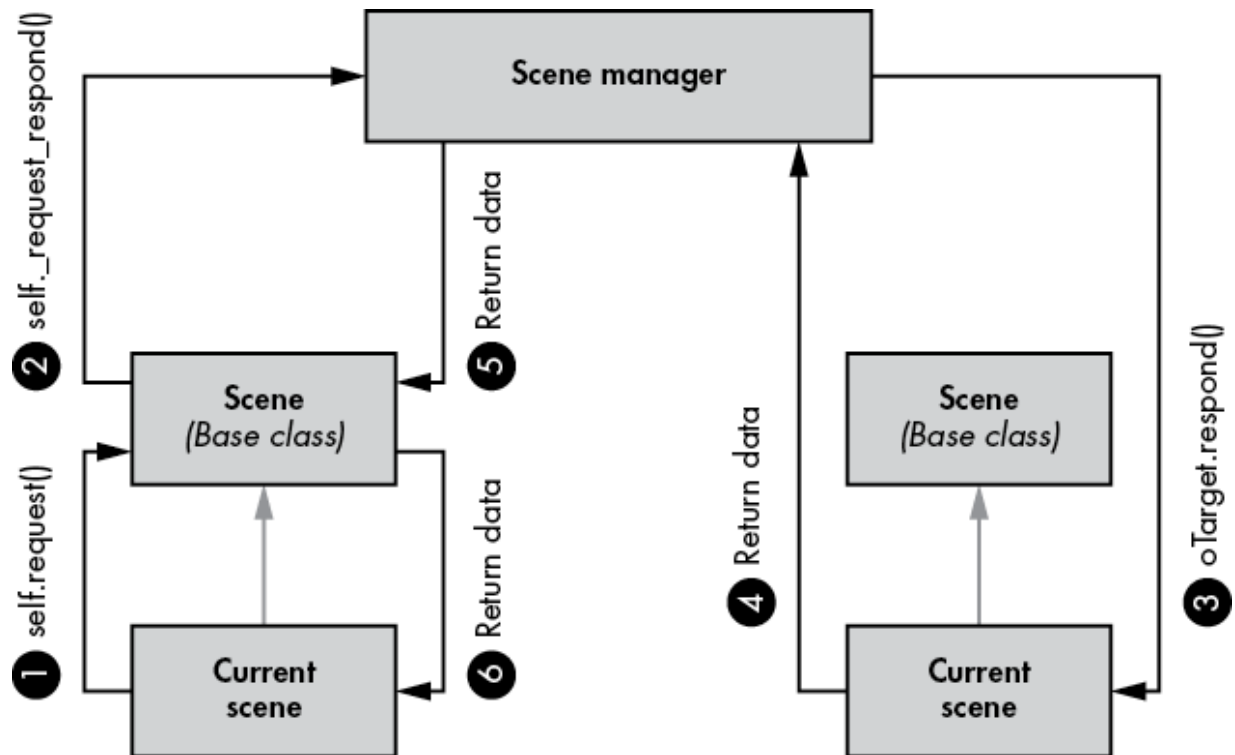




*Figure 15-10: The communication path of one scene asking for information from another scene*

The current scene cannot get information from another scene directly, since the current scene does not have a reference to any other scene. Instead, it uses the scene manager as an intermediary. Here is how it all works:

1. The current scene makes a call to `self.request()`, which lives in the inherited `Scene` base class.
2. The `Scene` base class has a reference to the scene manager in its instance variable `self.oSceneMgr`, to allow its methods to call methods of the scene manager. The `self.request()` method calls the scene manager's `_request_respond()` method to request information from a target scene.
3. The scene manager has a dictionary of all scene keys and related objects, and it uses the parameter that's passed in to find the object associated with the target scene. It then calls the `respond()` method in the target scene.