
```
'Do you want fries with that?')
```

This call shows the dialog in [Figure 16-1](#).

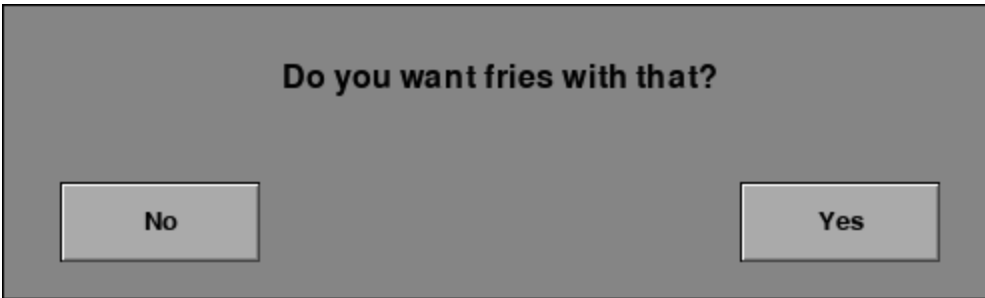


Figure 16-1: A typical `textYesNoDialog` dialog

The Yes and No buttons are instances of the `TextButton` class in `pygwidgets`. The main program stops while the dialog shows. When the user clicks a button, the function returns `True` for Yes or `False` for No. Your code does whatever needs to be done based on the returned Boolean value; then the main program continues running where it left off.

You can also use this function to create a simple Alert dialog with only one button. If the value passed in for `noButtonText` is `None`, that button will not be shown. For example, you can make a call like this to show only one button:

```
ignore = pyghelpers.textYesNoDialog(window, (75, 80, 500, 150),  
                                     'This is an alert!', 'OK', None)
```

[Figure 16-2](#) shows the resulting Alert dialog.