

[Figure 16-3](#) shows the resulting dialog. This is just one example; you can design any layout you like.

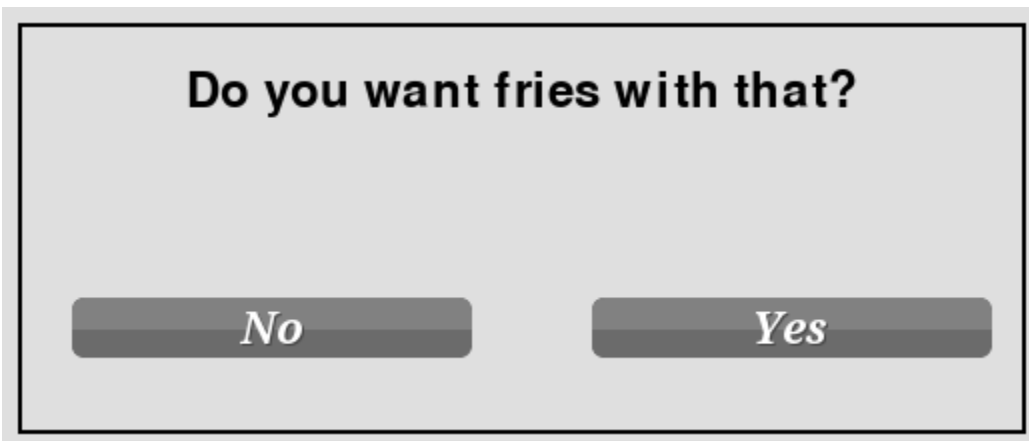


Figure 16-3: A typical customYesNoDialog dialog

As with the simple text version, if the value passed in for `oNoButton` is `None`, that button will not be shown, which is useful for building and displaying an Alert dialog.

Internally, the `textYesNoDialog()` and `customYesNoDialog()` functions each run their own `while` loop that handles events and updates and draws the dialog. That way, the calling program is suspended (its main loop does not run) until the user clicks a button and the modal dialog returns the selected answer. (The source code of both functions is available in the `pyghelpers` module.)

Answer Dialogs

An Answer dialog adds an input text field where the user can type a response. The `pyghelpers` module also contains functions `textAnswerDialog()` and `customAnswerDialog()` to handle these dialogs, which work similarly to their Yes/No counterparts.

Text Version

Here is the interface of the `textAnswerDialog()` function:

```
textAnswerDialog(theWindow, theRect, prompt, okButtonText='OK'
                 cancelButtonText='Cancel',
```