- *Security groups*—Control incoming and outgoing traffic to your virtual machine, your database, or your load balancer with a firewall. For example, use a security group allowing incoming HTTP traffic from the internet to port 80 of the load balancer. Or restrict network access to your database on port 3306 to the virtual machines running your web servers.

Figure 2.1 shows all the parts of the infrastructure in action. Sounds like a lot of stuff to set up, so let's get started!

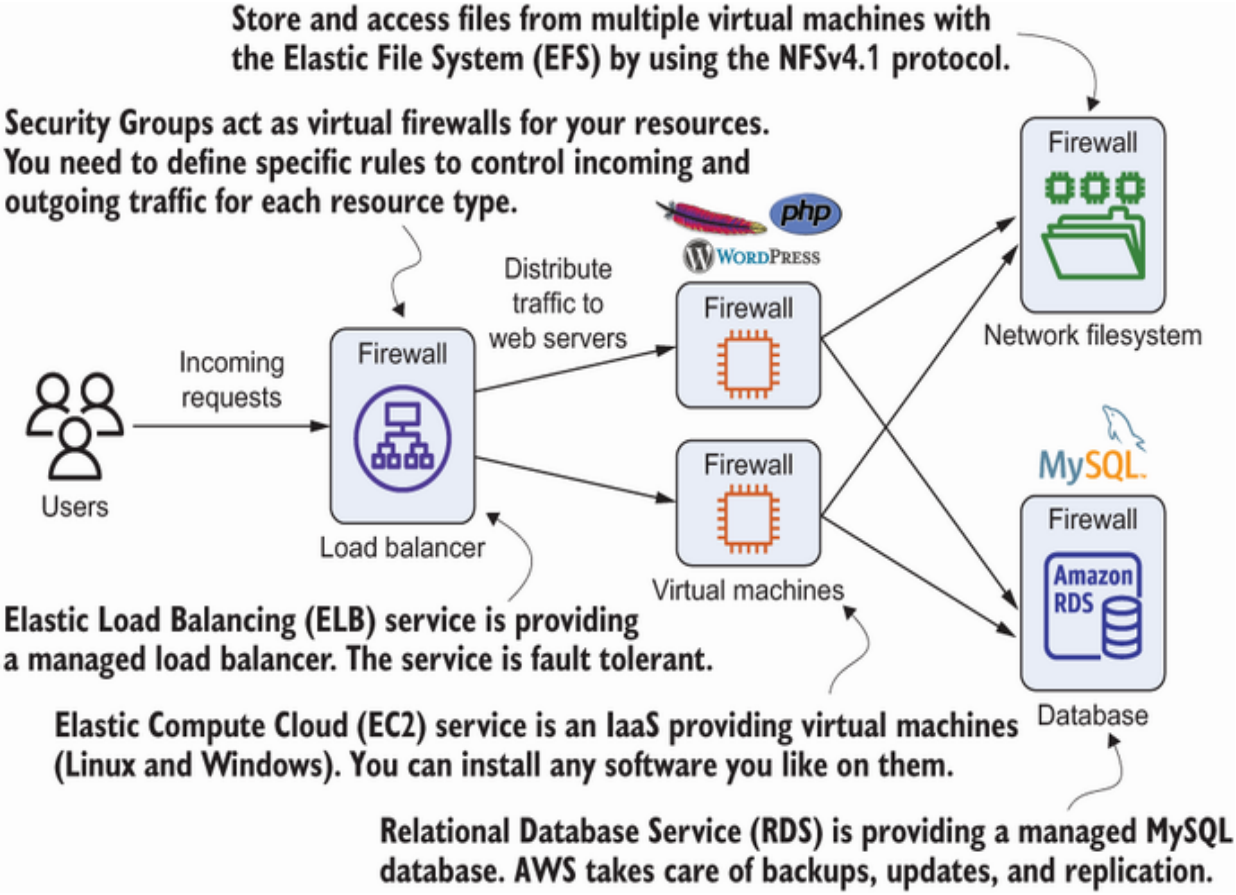


Figure 2.1 The company's blogging infrastructure consists of two load-balanced web servers running WordPress, a network filesystem, and a MySQL database server.