Specify wordpress as the Stack name and, in the Parameters section, set the WordpressAdminPassword to a password of your choice that you are not using somewhere else, as shown in figure 2.3.

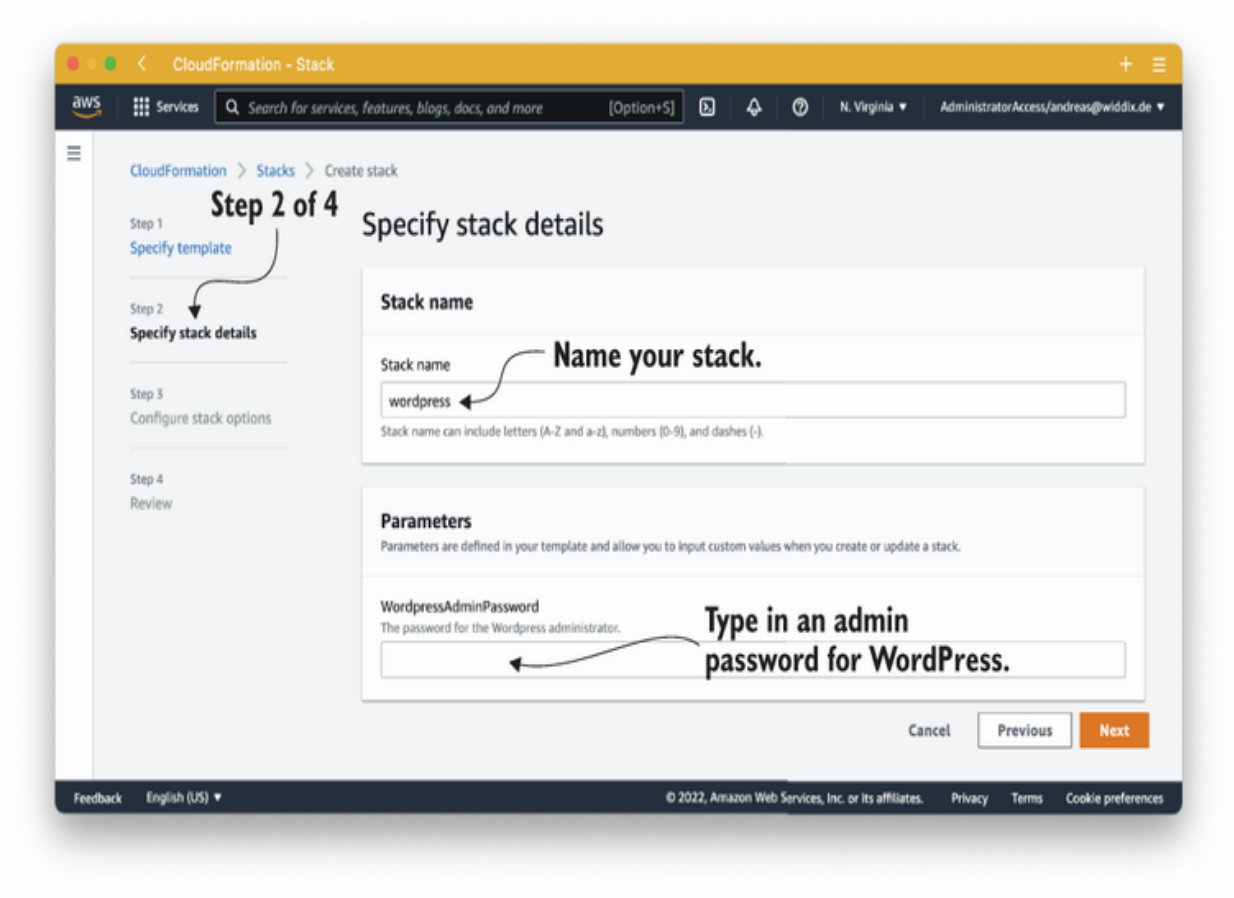


Figure 2.3 Creating the stack for the proof of concept: Step 2 of 4

The next step is to specify tags for your infrastructure, as illustrated in figure 2.4. A *tag* consists of a key and a value and can be used to add metadata to all parts of your infrastructure. You can use tags to differentiate between testing and production resources, add a cost center to easily track costs in your organization, or mark resources