6. Select the resource type Instance, and select your EC2 instance named `sydney` from the dropdown list, as shown in figure 3.24.

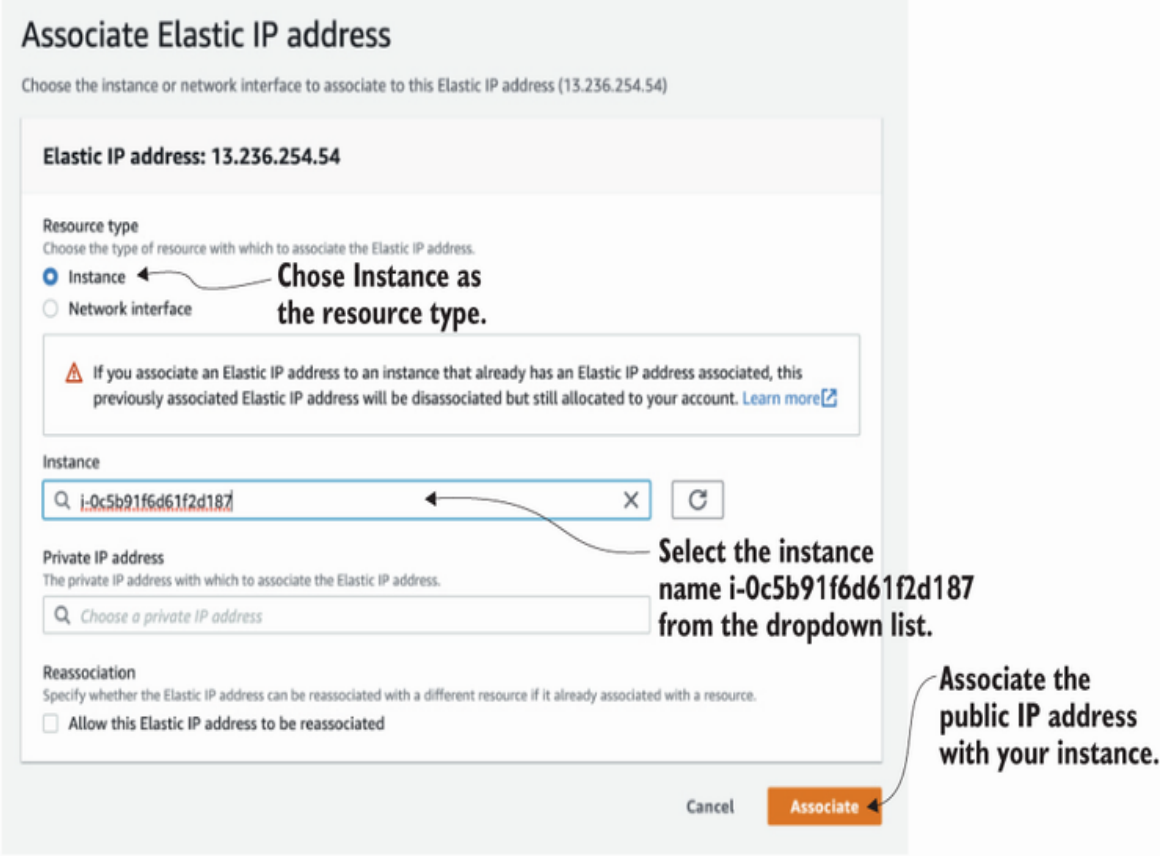


Figure 3.24 Associating an Elastic IP address with an EC2 instance

7. Click the Associate button.

Hurray! Your virtual machine is now accessible through the public IP address you allocated at the beginning of this section. Point your browser to this IP address, and you should see the placeholder page as you did in section 3.5.

Allocating a static public IP address can be useful if you want to make sure the endpoint to your application doesn't change, even if you have to replace the virtual machine behind the scenes. For example, assume that