10.3.3 Restoring a database

Imagine a scary scenario: you have accidentally deleted all of the blog posts from your WordPress site. Of course, you want to restore the data as fast as possible. Lucky for you, RDS has you covered.

If you restore a database from an automated or manual snapshot, a new database will be created based on the snapshot. As figure 10.2 shows, you can't restore a snapshot to an existing database.

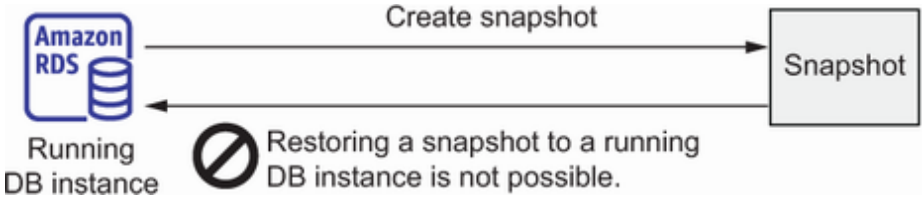


Figure 10.2 A snapshot can't be restored into an existing database.

Instead, a new database is created when you restore a database snapshot, as figure 10.3 illustrates.

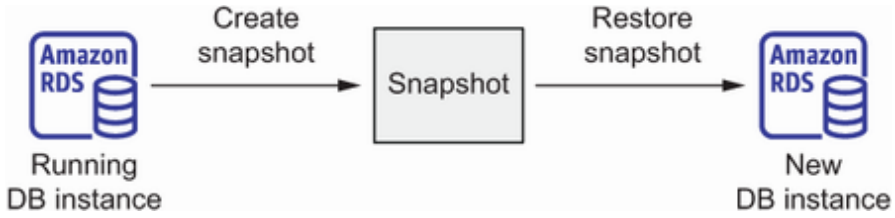


Figure 10.3 A new database is created to restore a snapshot.

To create a new database in the same VPC as the WordPress platform you started in section 10.1, you need to find out the existing database's subnet group. Execute this command to do so: